


1 2 3 4 5 6 7 8

A

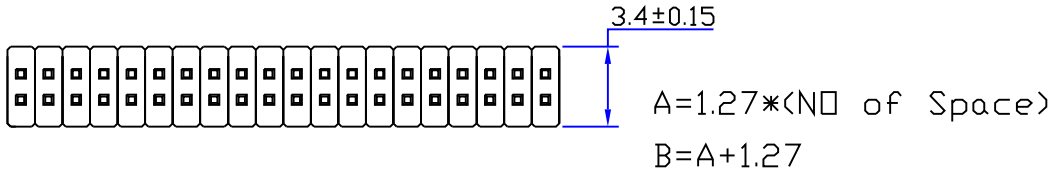


SPECIFICATIONS

Current Rating: 1 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)

A

B

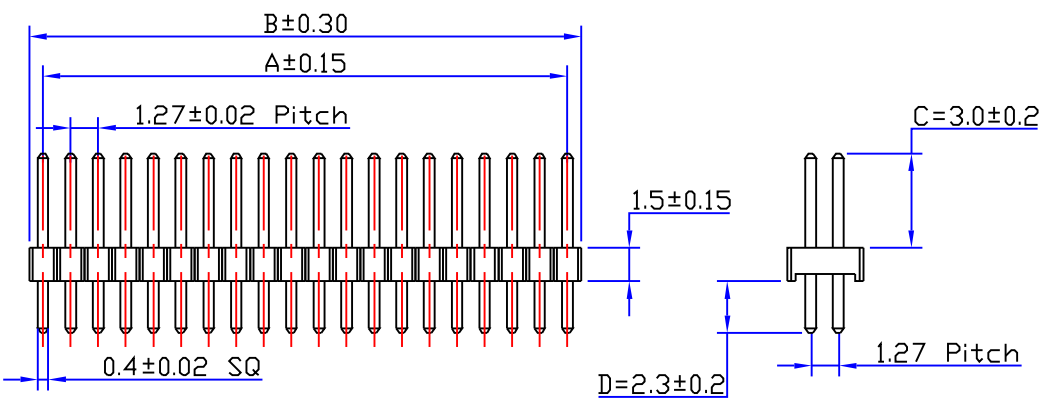


MATERIAL&FINISH

Contact: Brass
 Insulator Material: Nylon 6T
 Color: Black
 Finish: Gold Flash Plated Over Nickel

B

C

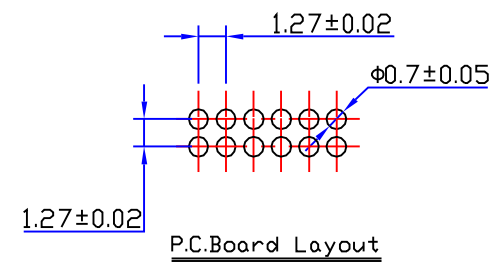

C

D

E

ORDER INFORMATION

Contact No.	Row Type	Contact Type	Contact Plating	Pin Length (mm)	Others
C1280 - A0	B	S	G	A S	0
04(2X2)-100(2X50) * 100P=A0	B: Dual Row	S: Straight	T: Tin S: Selective Gold G: Gold Flash A: Gold 5U* B: Gold 10U* C: Gold 15U* D: Gold 30U*	AS(180°) C=3.00mm D=2.30mm	0: No Option T: Tube Packing R: Reel Packing P: PAD+Tube Packing Q: PAD+Reel Packing

D

E

F

G

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE	PART NAME	
MM		3:1	1.27X1.27mm PIN HEADER H=1.5mm 180° DUAL ROW(C=3.0 D=2.3)	

F

H

制表日:2003/08/19	DRAWING.	APPROVED	APPD.	CKD.	TOLERANCE	PART NO.	REV.
	Jane				± 0.2	C1280-XXBSXAS0	A

H

1 2 3 4 5 6 7 8