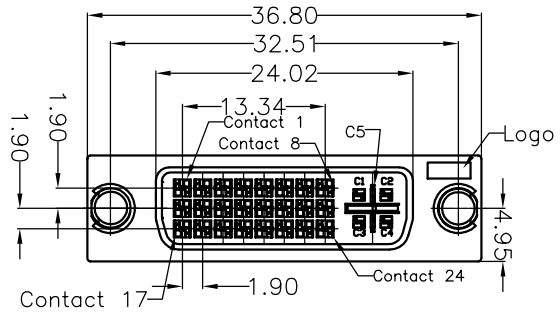

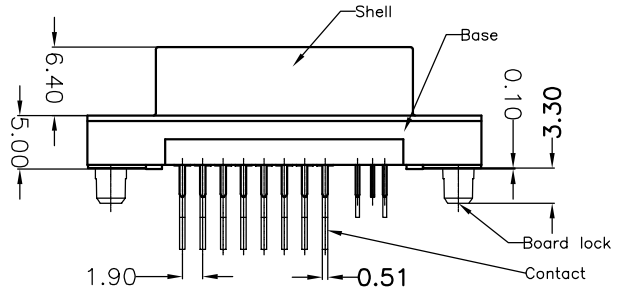



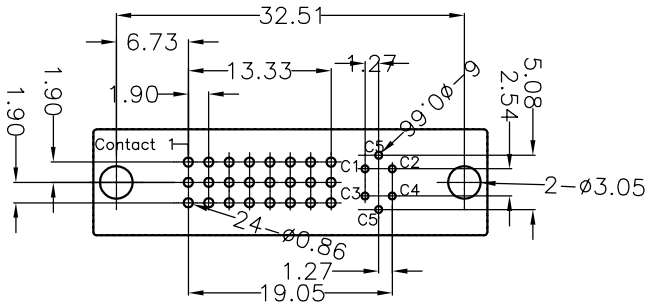

PC BOARD MOUNTING PATTERN
COMPONENT SIDE



Specifications:
Current rating:1.5A
Voltage rating:40V
Contact resistance:20Mohm min.
Insulation resistance:1000Mohm min.
Withstanding voltage:500V AC/minute
Temperature range:−20°C to +85°C
Instertion Force:4.5Kg/max.
Withdrawal Force:1Kg/min.

Material:
Insulation:Glass Filled thermplastic
Natural UL94V0
Contact:Phosphor Bronze
Shell:Zinc or Spcc,Nickel over Cu Plated
Board Cock:Brass Tin Plated

How To Order
5518S−24−5M15

- 5518S: Straight
- 24: No. Of Contacts
- 5M15: Analog Type

REV	DATE	FILE	BY
E			
D			
C			
B			
A	19−Jul−2004	(GY5)	Joy

DRAWN: Joy
CHECKED: Jeremy Liu
APPROVAL: Mike Wu

GENERAL TOLERANCE:
.X=±0.2
.XX=±0.15
UNIT: MM
SCALE:20:1
SHEET: 1 / 1
PROJECTION:

繼德工業股份有限公司
Neltron Industrial Co., Ltd.

DESCRIPTION: DVI CONNECTOR INTEGRATED
24+5 SOCKET VERTIAL TYPE
PART NO: 5518S−24−5M15
SIZE: A4