


VIEWING DIRECTION

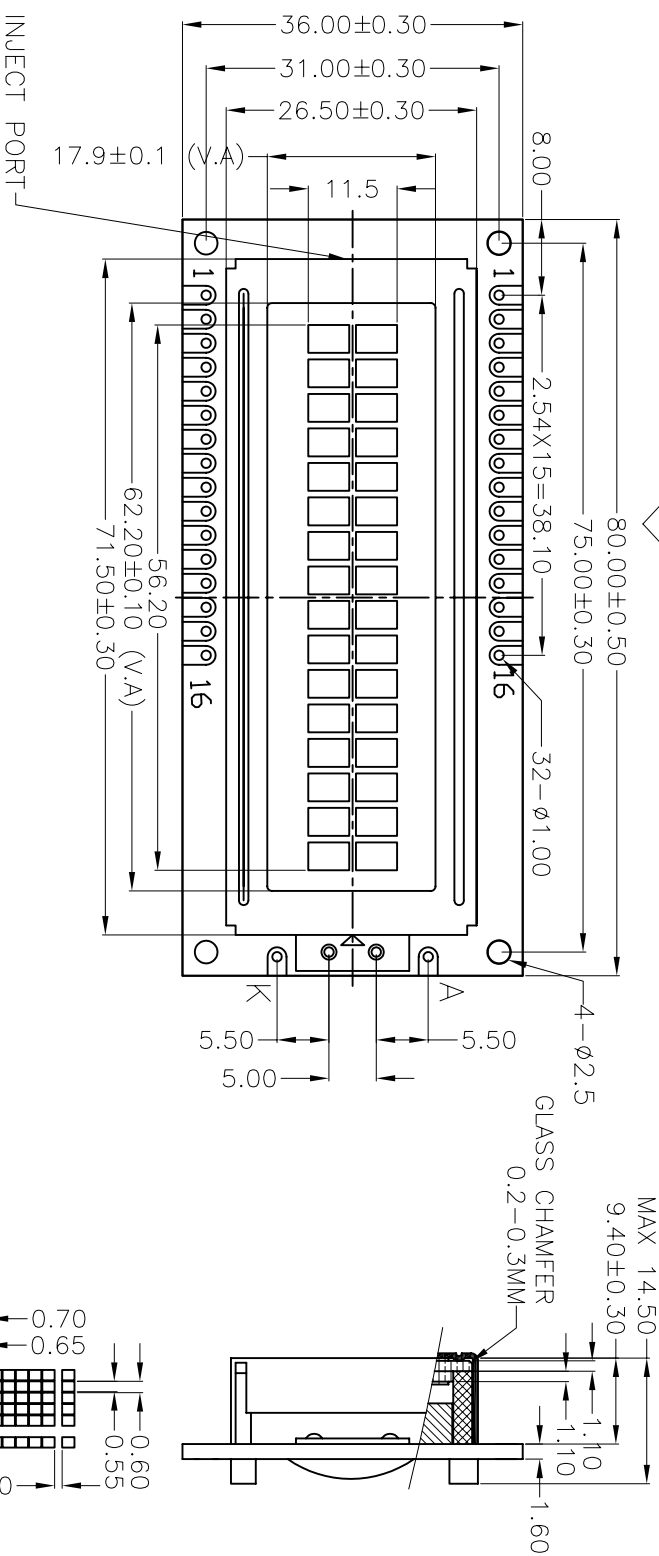

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED	LEDK

Specification:

- 1).Driving: 1/16 Duty, 1/5 Bias, Vcd: 4.2V VDD: 5.0V
- 2).Viewing angle: 6 0'clock
- 3).Display mode: STN/Transflective/Positive/Yellow-Green
- 4).Operating Temp: -20°C~+70°C
Storage Temp: -30 C~+80°C
- 5).Led Color: YELLOW-GREEN BOTTOM
- 6).Use IC: S6A0069X01-C0CX
- 7).Dimensions with mark "*" are important, with mark "<>" are referenced

DESCRIPTION:

C/D

SCALE: MT	MODEL NUMBER: HY-1602W-204
SHEET: 1 OF 1	PROJECTION
GENERAL TOL: ±0.3	PART NO: JG-1602W-204
APPROVALS DATE	
APP: _____	
CHK: _____	
DWN: _____	

SHENZHEN AV-DISPLAY CO., LTD
深圳秋田视佳实业有限公司

