



1 2 3 4 5 6 7 8


A

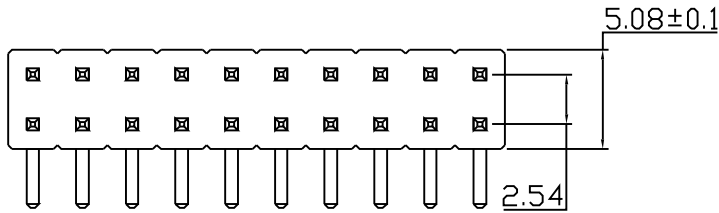

B

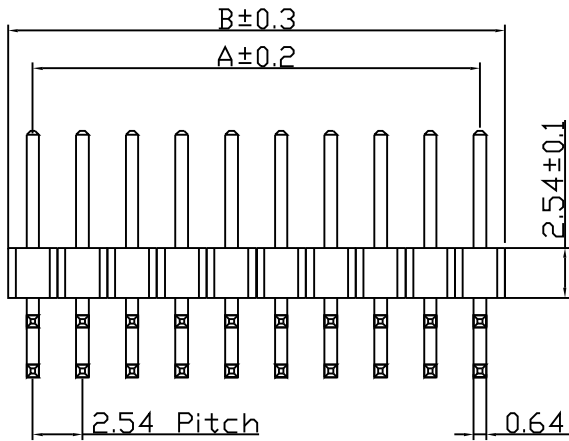

$A = 2.54 * (\text{No of Space})$
 $B = A + 2.54$



SPECIFICATIONS

Current Rating: 3 Amps
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° for 30-60 seconds
 (260° for 10 seconds)

MATERIAL&FINISH

Contact: Brass
 Insulator Material: PBT
 Color: Black
 Finish: Gold Flash Plated Over Nickel

A

B

C


D

E

F

G

H

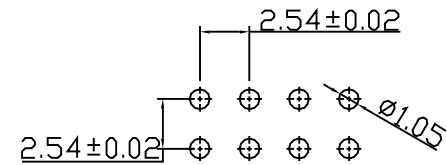

P.C.Board Layout

ORDER INFORMATION

Contact No.	Row Type	Contact Type	Contact Plating	Pin Length (mm)	Others
C2200 - 80	B	R	G	A R	0
04(2X2)-80(2X40)	B: Dual Row	R: Right Angle	T: Tin S: Selective Gold G: Gold Flash A: Gold 50" B: Gold 100" C: Gold 150" D: Gold 300"	AR(90°) C=6.00mm D=3.00mm E=1.18mm	0: No Option T: Tube Packing R: Reel Packing P: PAD+Tube Packing Q: PAD+Reel Packing

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT

SCALE

PART NAME

MM

2:1

2.54X2.54 Pin Header Dual Row
 Right Angle (C=6.0 D=3.0 E=1.18)

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日: 2003/07/15

DRAWING.

APPROVED

± 0.3

C2200-XXBRGAR0

A

Jane

1

2

3

4

5

6

7

8