


C 100

C 100 Series AC/DC Converters

Total power	100 Watts
Input voltages	AC 90~132V (or DC120~170V) AC 170~264V (or DC220~340V)
#of outputs	Single output

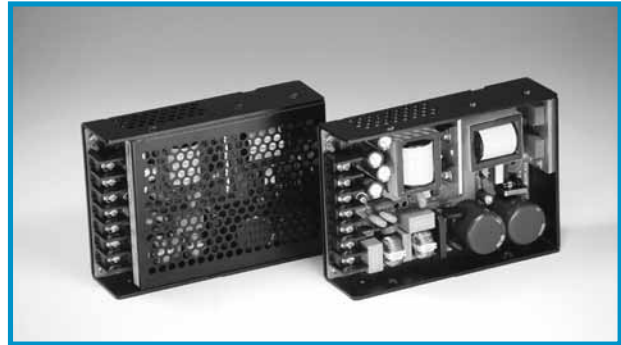

SPECIAL FEATURES

- Small, compact size
- Surface mounting technology
- High efficiency
- Selected input voltage
- Built - in EMI filter
- Inrush current limit
- Adjustable output voltage (Output1)
- Output over current protection
- Output over voltage protection
- Over temperature protection
- Low output ripple & noise
- Isolated output
- 2 Years warranty

ENVIRONMENTAL

- Operating temperature range -10℃~60℃
- Storage temperature range -20℃~70℃
- Humidity 20%~90%RH
- Vibration 10~55Hz at 2G 3minutes period
- Impact 20G for 11ms, once on each X, Y and Z-axis
- Cooling method Natural air
- MTBF 1.7×10⁶hrs
- Safety meets EN 60950
UL 60950 / CSA C22.2
- Noise meets CISPR22-B
FCC class B

ELECTRICAL SPECIFICATIONS

INPUT	<ul style="list-style-type: none"> • Voltage CS 100L - AC90~132V (or DC 120~170V) CS 100 - AC 170~264V (or DC 220~340V) • Current 1.2A max. (CS 100) / 2.3A max. (CS 100L) • Frequency 47~440Hz max. (50~60Hz typ.) • Efficiency 81% min. • Inrush current (at cold start) 20A max. @ 110VAC (CS 100L) / 40A max. @ 220VAC (CS 100) • Leakage current 0.5mA max. @ 110VAC (CS 100L) / 0.75mA max. @ 220VAC (CS 100)
OUTPUT	<ul style="list-style-type: none"> • Voltage adj. Range ±10% typ. • Ripple and noise 1% max. • Line regulation ±1% max. • Load regulation ±1% max. • Dynamic load regulation ±3% max. • Temperature drift ±1% typ. • Rising time 100ms max. • Holding time 17ms min.
PROTECTION CIRCUIT	<ul style="list-style-type: none"> • Over current protection over 105% of rating (Auto-restart) • Over voltage protection 115~140% of rating (Latch-up mode) • Over temperature protection 75℃ min. (Latch-up mode)
ELECTRICALLY ISOLATED	<ul style="list-style-type: none"> • Input - Output AC 3kV, 1minute, 10mA / DC 500V, 100MOhms min. • Input - FG AC 2kV, 1minute, 10mA / DC 500V, 100MOhms min. • Output - FG AC 0.5kV, 1minute, 10mA / DC 500V, 70MOhms min.


Ordering Information

Input	Output	Maximum Power	Ripple & Noise max	Efficiency Typ.	model Number
AC 90~132V (or DC 120~170V)	+3.3V@20.0A	66.0W	80mVp-p	81%	CS100L-3R3
	+5.0V@20.0A	100.0W	100mVp-p	82%	CS100L-5
	+12.0V@8.4A	100.8W	120mVp-p	84%	CS100L-12
	+15.0V@6.7A	100.5W	150mVp-p	85%	CS100L-15
	+24.0V@4.2A	100.8W	200mVp-p	86%	CS100L-24
	+48.0V@2.1A	100.8W	300mVp-p	86%	CS100L-48
AC 170~264V (or DC 220~340V)	+3.3V@20.0A	66.0W	80mVp-p	82%	CS100-3R3
	+5.0V@20.0A	100.0W	100mVp-p	83%	CS100-5
	+12.0V@8.4A	100.8W	120mVp-p	85%	CS100-12
	+15.0V@6.7A	100.5W	150mVp-p	86%	CS100-15
	+24.0V@4.2A	100.8W	200mVp-p	88%	CS100-24
	+48.0V@2.1A	100.8W	300mVp-p	88%	CS100-48


Pin assignments

Connector	Single
CN 1	1. AC(N)
	2. AC(L)
	3. FG
	4. -V
	5. -V
	6. +V
	7. +V

Derating curve

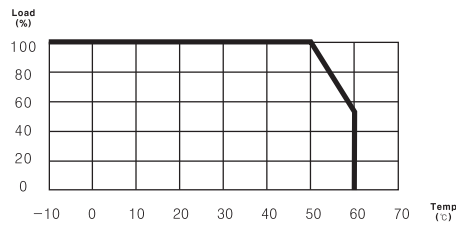

Dimensions

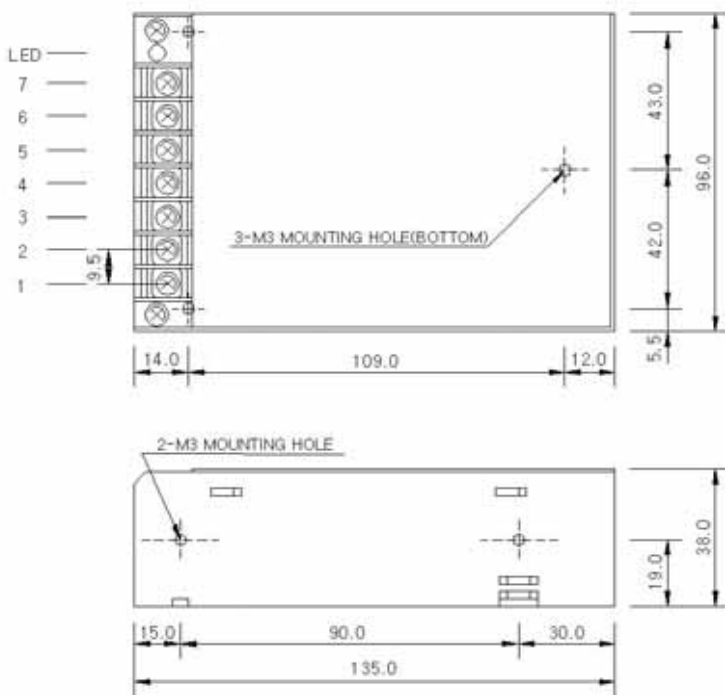

NOTES

1. All dimensions are mm.
2. Weight : 560g or less (single)
3. Mounting holes(5) for M3 screw, which should not enter the supply surface by more than 3.5mm.