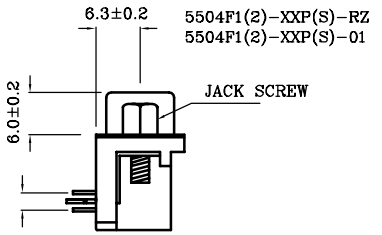

BOARD LOCK/HEX SCREW 01

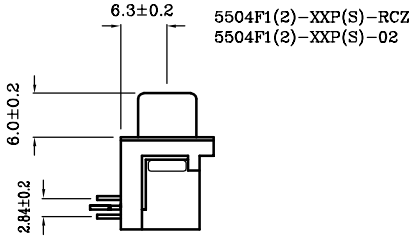

RIVET W/ BOARD LOCK 02

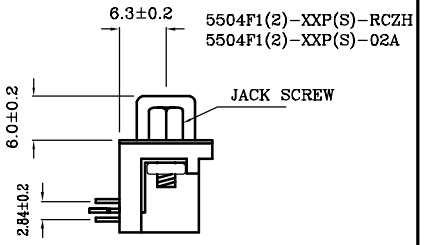

RIVET W/ BOARD LOCK/ HEX SCREW 02A

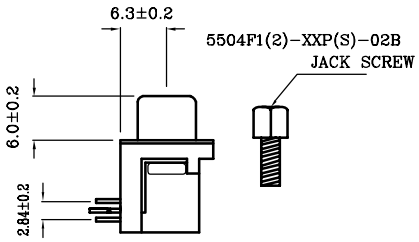

RIVET W/ BOARD LOCK/ ATTACH HEX SCREW 02B

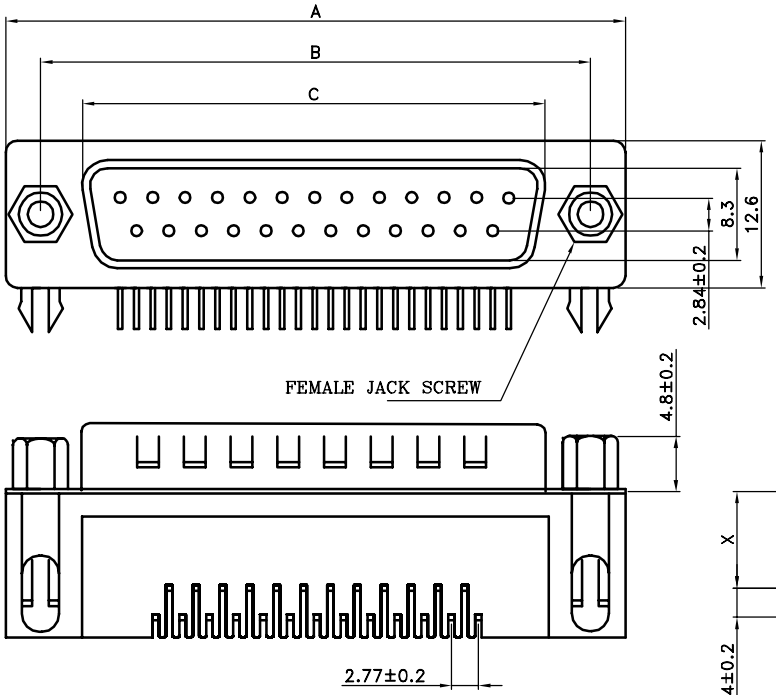

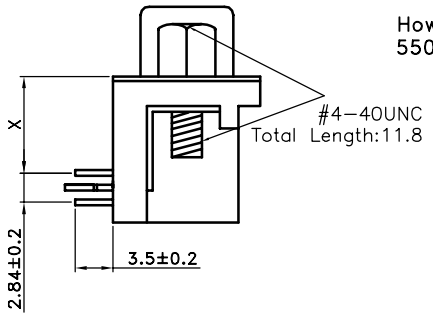

Specifications:
Current rating:3.0A AC,DC
Voltage rating:250V AC,DC
Temperature range:-40°C ~ +85°C
Contact resistance:30mohm max.
Insulation:5,000Mohm min.
Withstanding voltage:1,000V AC/Minute

Materials:
Insulator:PBT Glass fiber 30%(UL94V-0)
Contact:Copper alloy Nickel Undercoated
,Selective Gold plated (1u" gold)
Shell:Metal Iron with nickel plated

Mechanical Environment:
Durability:50 cycles
Quality class:3

POSITIONS	A±0.5	B	C
9	30.81	24.99	16.92
15	39.14	33.32	25.25
25	53.04	47.04	38.96
37	69.32	63.50	55.42

How to Order
5504FX-XXP-XX-XX

- FX: F1:8.08MM FOOTPRINT; F2:9.4MM FOOTPRINT
- XXP: P:MALE; S:FEMALE
- XX: 01:BOARD LOCK/ HEX SCREW; 02:RIVET W/ BOARD LOCK; 02A:RIVET W/ BOARD LOCK/ HEX SCREW; 02B:RIVET W/ BOARD LOCK ATTACH HEX SCREW
- XX: 01:FULL GOLD; 02:Selective GOLD; 03:HIGH QUALITY SELECTIVE GOLD

REV	DATE	FILE	BY
E			
D			
C			
B	15-APR-2004		Jerry Chen
A	09-19-2002		Jerry Chen

DRAWN: Jerry Chen
CHECKED: Jeremy
APPROVAL: Mike

GENERAL TOLERANCE:
.X=±0.2
.XX=±0.15
UNIT: mm
SCALE:
SHEET: 1 / 1
PROJECTION:

繼德工業股份有限公司
Neltron Industrial Co., Ltd.

DESCRIPTION: D-SUB Standard Right Angle Male
PART NO: 5504FX-XXP-XX-XX
SIZE: A4