



NOTES:

- 1. Using Temperature Range:
-40°C ~ +85°C
- 2. RoHS compliance

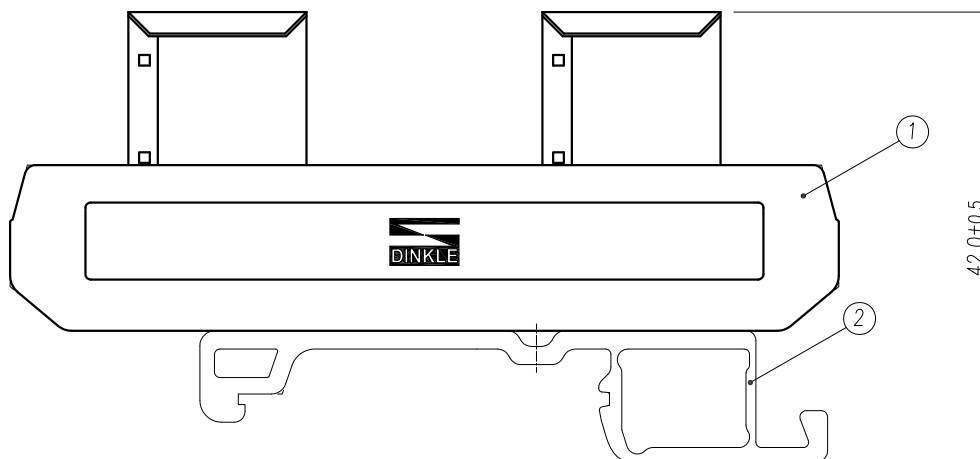

WIRING LAYOUT

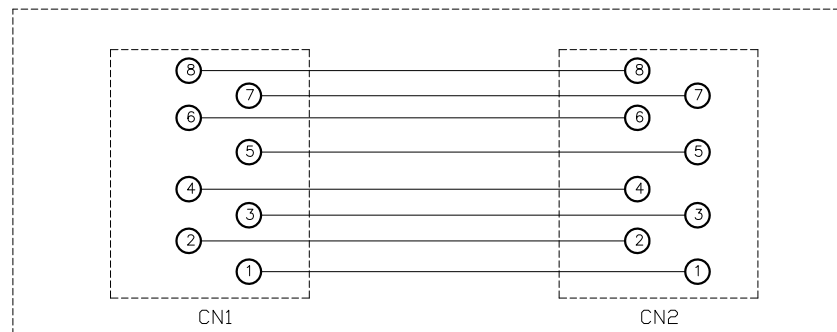

Total Pitch Tolerances		Normal Dimension Tolerances	
0~30	±0.20	0~30	±0.25
over 30~53	±0.25	over 30~53	±0.30
over 53~70	±0.30	over 53~70	±0.35
over 70~90	±0.35	over 70~90	±0.44
over 90~115	±0.44	over 90~115	±0.55
over 115~150	±0.55	over 115~150	±0.70
over 150~200	±0.70	over 150~200	±0.85
over 200~250	±0.85	over 200~250	±1.00
over 250~320	±1.00	over 250~320	±1.20

ITEM	NAME OF PART	MATERIAL	NOTES
4	COMMUTATOR	PBT	UL94-V0 BLACK
3	PCB	FR4	GREEN
2	PATH PLYWOOD	PA66	UL94-V0 GREEN
1	HOUSING	PA66	UL94-V0 GREEN

DWG.	LJW	DATE	2020.07.13	UNITS	MM	SHEET/OF	1 / 1
CHK.	Siber.Ma	DATE	2020.07.13	SCALE	2:1 (:)		
APP.	Webb.Liu	DATE	2020.07.13	NAME	0170-01-7360		
DINKLE ENTERPRISE CO., LTD.				DWG NO.	SP-03-01707360		

REV.	CONTENT	NAME	DATE