


1 2 3 4 5 6 7 8

A

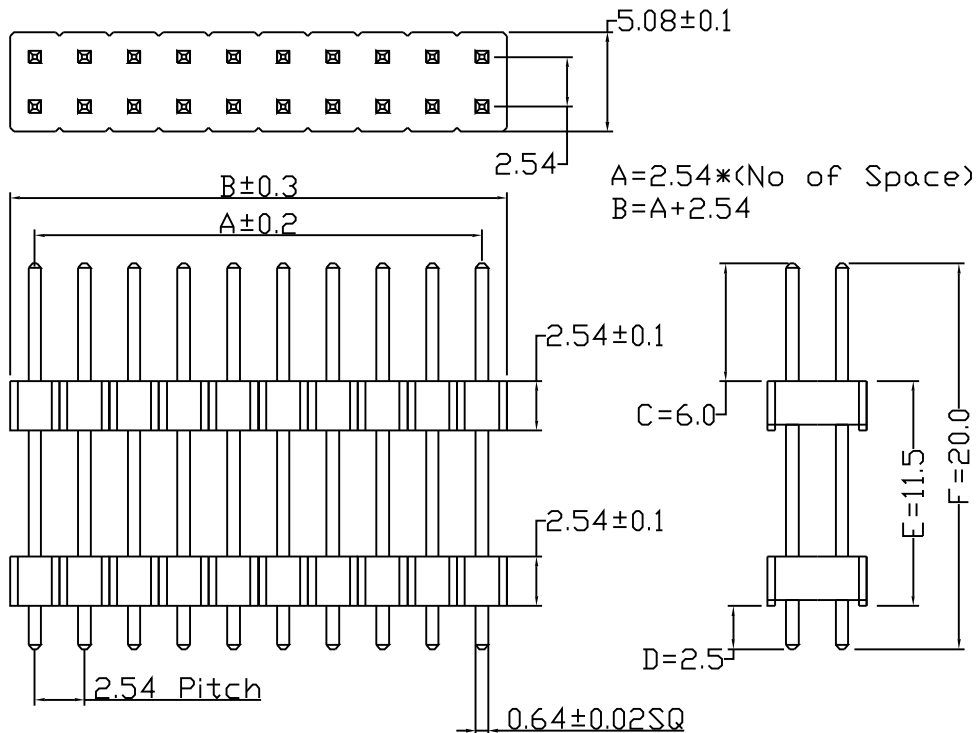


SPECIFICATIONS

Current Rating: 3 Amps
Dielectric Withstanding: AC 500V
Operating Temperature: -40°C to $+105^{\circ}\text{C}$
Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)

MATERIAL&FINISH

Contact: Brass
Insulator Material: PBT
Color: Black
Finish: Gold Flash Plated Over Nickel

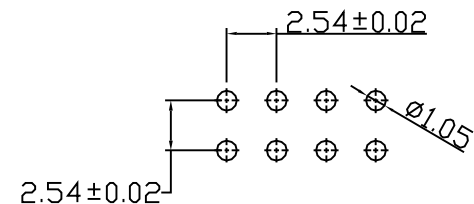

P.C. Board Layout

ORDER INFORMATION

C2200 —

04(2X2)~80(2X40) F: Dual Row /Dual Insulator S: Straight T: Tin S: Selective Gold G: Gold Flash A: Gold 50 μ B: Gold 10 μ C: Gold 15 μ D: Gold 30 μ

Pin Length (mm) C=6.00mm D=2.50mm E=11.50mm F=20.00mm

Others 0: No Option T: Tube Packing R: Reel Packing P: PAD+Tube Packing Q: PAD+Reel Packing

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT

SCALE

PART NAME

MM

2:1

2.54X2.54mm Pin Header
Straight Dual Row/Dual Insulator

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日:2003/07/15

DRAWING.

APPROVED

± 0.3

C2200-XXFSGAD0

A

Jane

1 2 3 4 5 6 7 8