
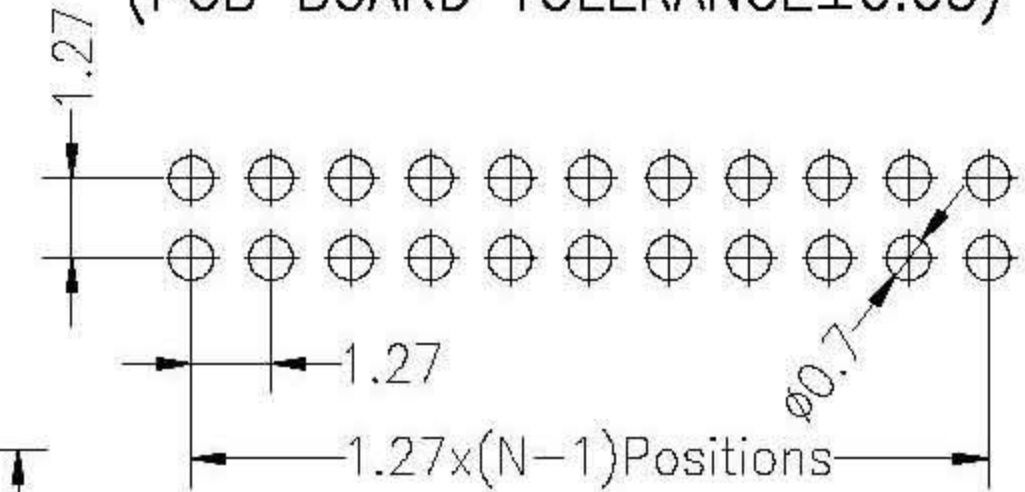


SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

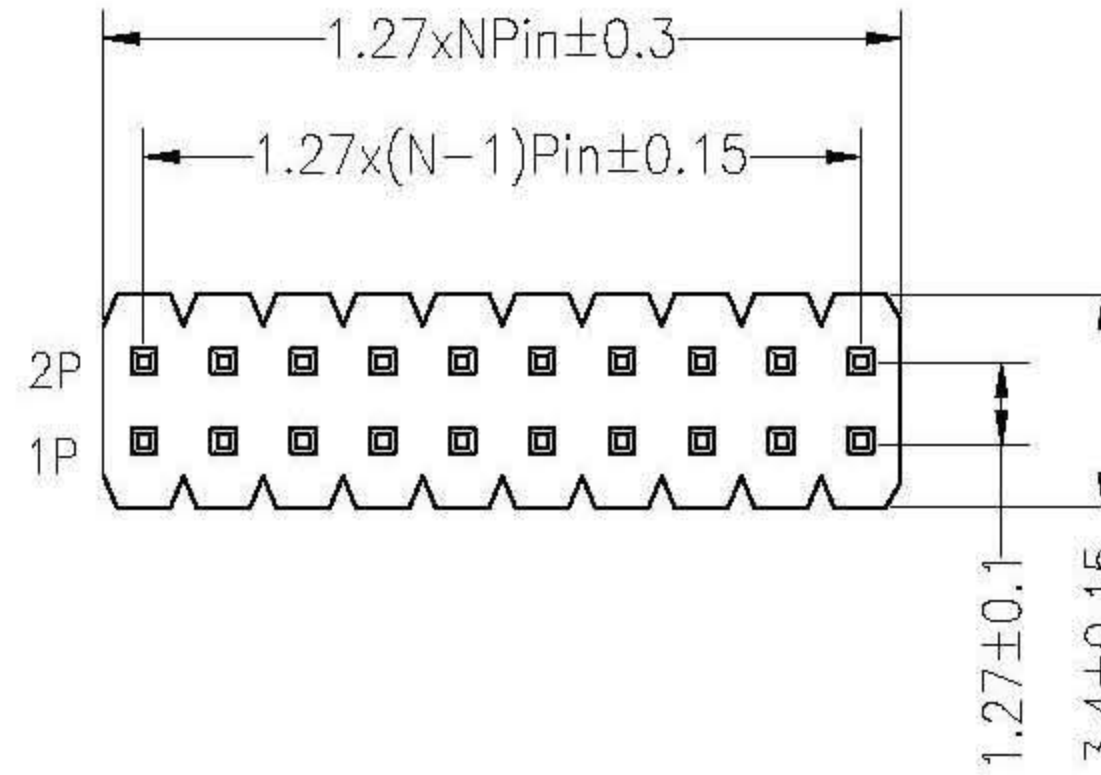

Ordering Information

1415-1 2 XX X X XX S XXX X 01

- No.of Pins Per Row: 2*50
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
- Post: W=With Post, N=W/O Post
- Contact Plating: G0:Gold Flash, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin, SN:Tin
- Pin Length
- Packing: O=PE Bag, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar

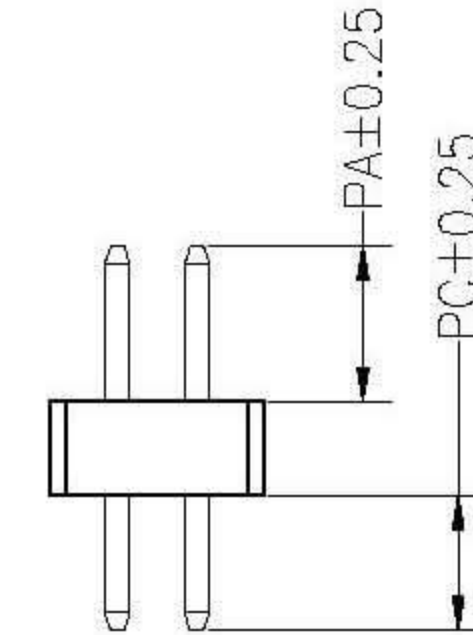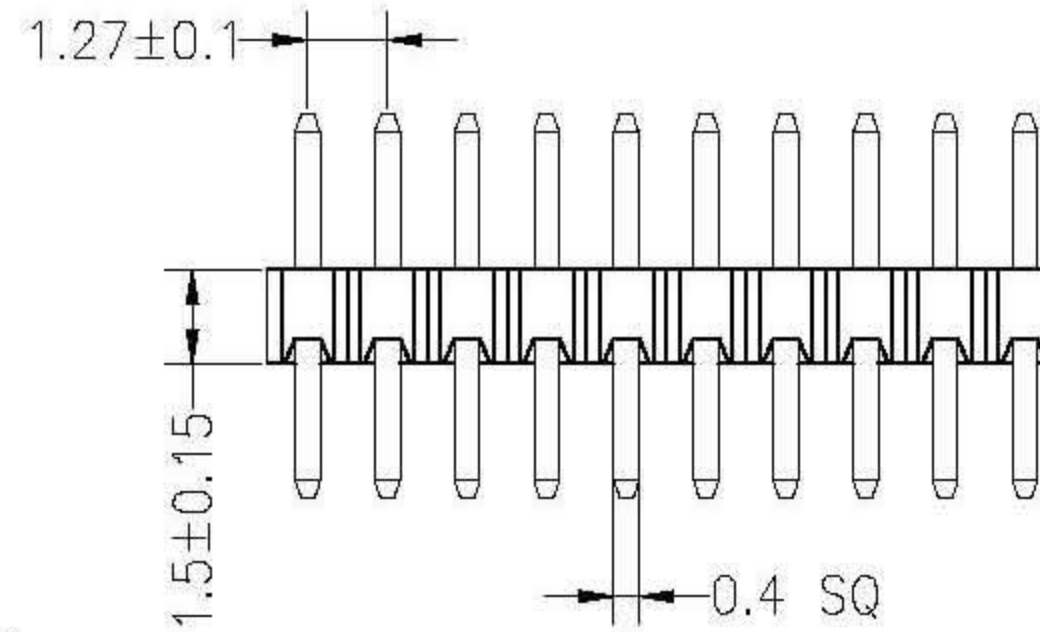

Dimension antitheses list			
ITEM	PA	PC	L
Alternate	3.00	2.30	6.80

JiLN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD

PART NO. 1415-12XXXNXXSXXX01
 TITLE: 1.27PH 2xnPin H1.5 180°

OPERATION		DRAW	YiYuSheng	12.08.19	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10				SIZE	A4
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL				PROJ.	◆

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.08.19	NEW DRAWING	