







SPECIFICATIONS
 Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

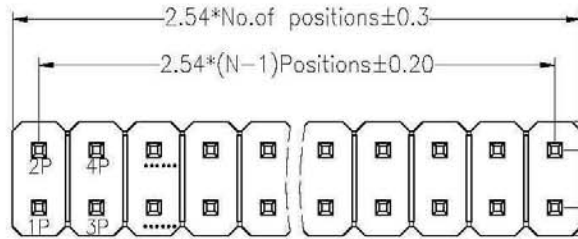

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

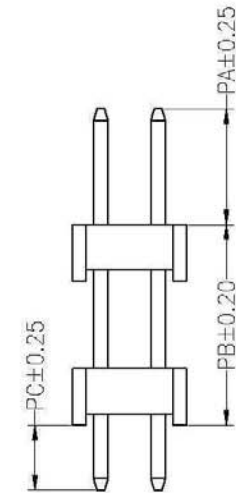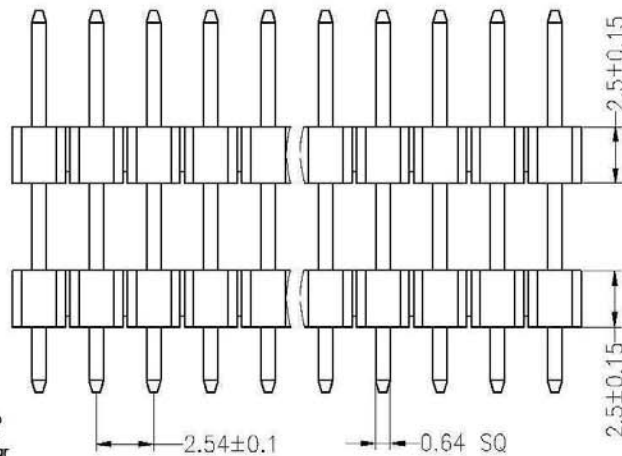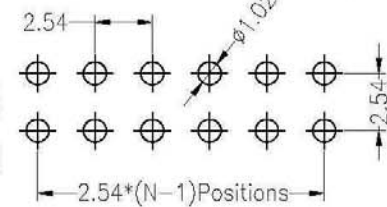

Ordering Information

1225 - 11 XX X N XX S XXX X 01

- No. of Pins Per Row 1x40 1--40
- Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
- Contact Plating
 G0:Gold Flash
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin
- Pin Length
- Packing
 O=PE Bag
 A=Tray
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 M=Reel+Mylar

Dimension antitheses list				
ITEM	PC	PA	PB	L
Standard				
Alternate	3.00	6.00	5.00	14.00

				OPERATION		DRAW	YiYuSheng	12.04.18	SCALE	FIT	深圳市锦凌电子有限公司	
				X.X	±0.30				UNIT	mm		
				X.XX ±0.20		CHECK			SIZE	A4	PART NO.	1225-22XXXNXXSXXX01
				X.XXX ±0.10					SHEET	1/1		
A0	2012.04.18	NEW DRAWING		Angle ±3°		APPROVE			PROJ.	◆	TITLE:	2.54PH Dual Row Double Plastic 180° H=2.5
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM TOL							