







SPECIFICATIONS
 Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

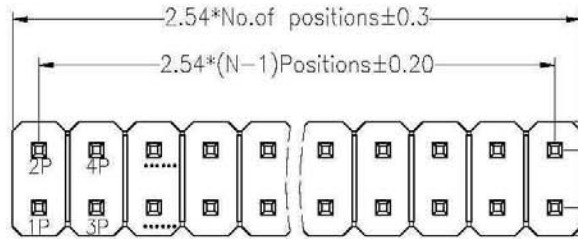

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

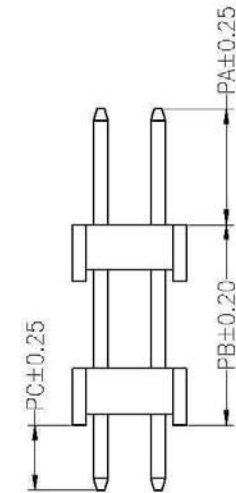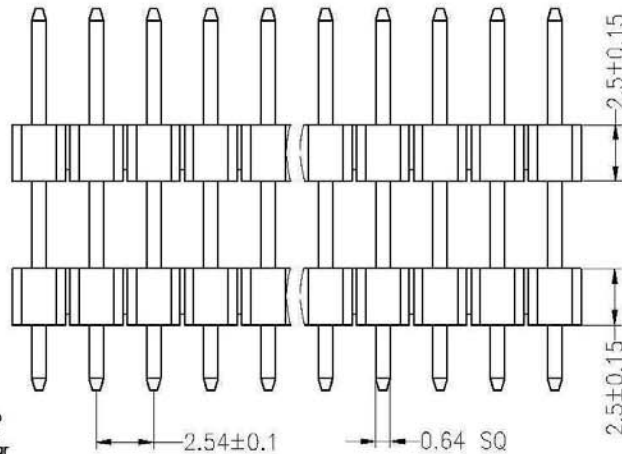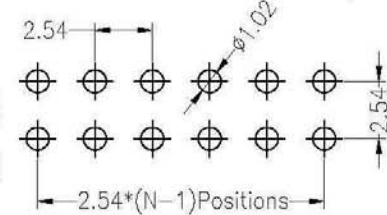

Ordering Information

1225 - 11 XX X N XX S XXX X 01

No. of Pins Per Row 1x40 1--40	Insulator Material Option A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 F=BK-LCP	Contact Plating G0:Gold Flash G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin	Pin Length	Packing O=PE Bag A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar
--------------------------------------	--	--	------------	---

Dimension antitheses list				
ITEM	PC	PA	PB	L
Standard				
Alternate	3.00	6.00	21.00	30.00

				OPERATION		DRAW	YiYuSheng	12.04.18	SCALE	FIT	深圳市锦凌电子有限公司	
				X.X	±0.30				UNIT	mm		
				CHECK				SIZE	A4	PART NO. 1225-22XXXNXXSXXX01		
				X.XXX	±0.10	SHEET	1/1					
A0	2012.04.18	NEW DRAWING		APPROVE				PROJ.	◆	TITLE:	2.54PH Dual Row Double Plastic 180° H=2.5	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL.						