







**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

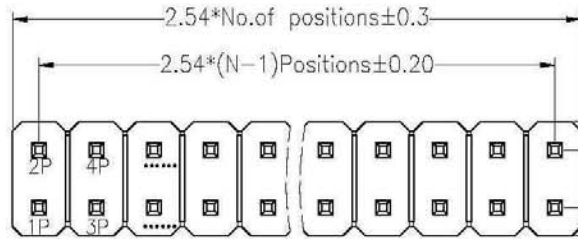

**Recommended P.C.B Layout(Top Side)**  
 (PCB BOARD TOLERANCE±0.05)

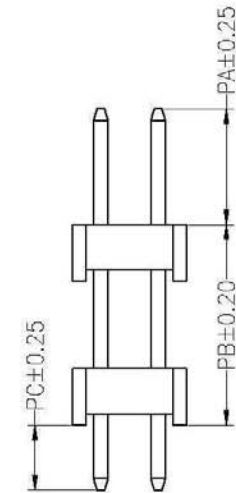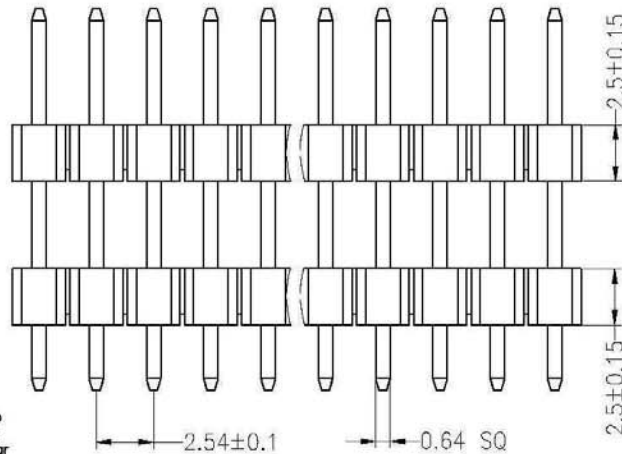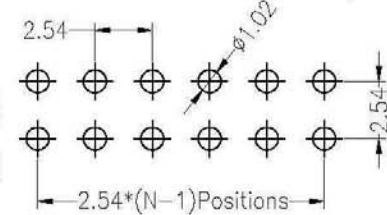

**Ordering Information**

1225 - 11 XX X N XX S XXX X 01

- No. of Pins Per Row 1x40 1--40
- Insulator Material Option  
 A=BK-PBT  
 B=BK-PA66  
 C=BK-PA6T  
 D=BK-PA46  
 F=BK-LCP
- Contact Plating  
 G0:Gold Flash  
 G2:5U" Gold  
 G3:10U" Gold  
 G4:15U" Gold  
 G5:30U" Gold  
 S0:Gold Flash/Tin  
 SN:Tin
- Pin Length
- Packing  
 O=PE Bag  
 A=Tray  
 T=Tube  
 P=Tube+Cap  
 R=Reel+Cap  
 M=Reel+Mylar

ITEM	PC	PA	PB	L
Standard				
Alternate	3.00	6.00	15.00	24.00

				OPERATION		DRAW	YiYuSheng	12.04.18	SCALE	FIT	深圳市锦凌电子有限公司	
				X.X	±0.30				UNIT	mm		
				CHECK				SIZE	A4	PART NO. 1225-22XXXNXXSXXX01		
				APPROVE				SHEET	1/1	TITLE: 2.54PH Dual Row Double Plastic 180° H=2.5		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL			PROJ.				