







SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

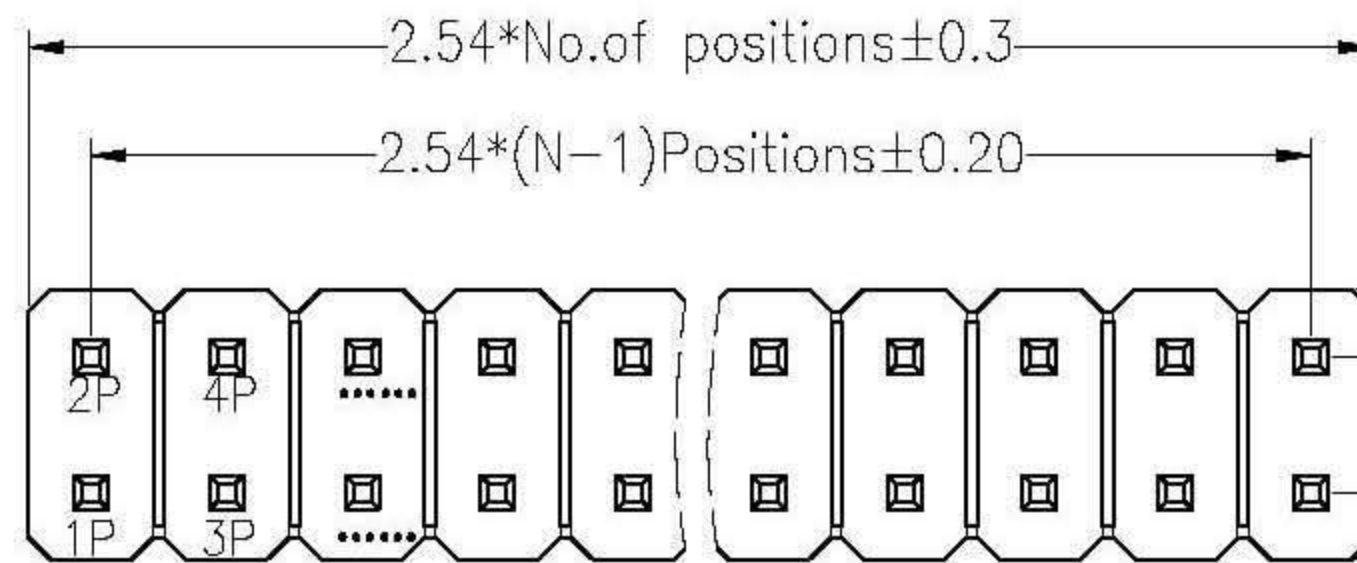

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

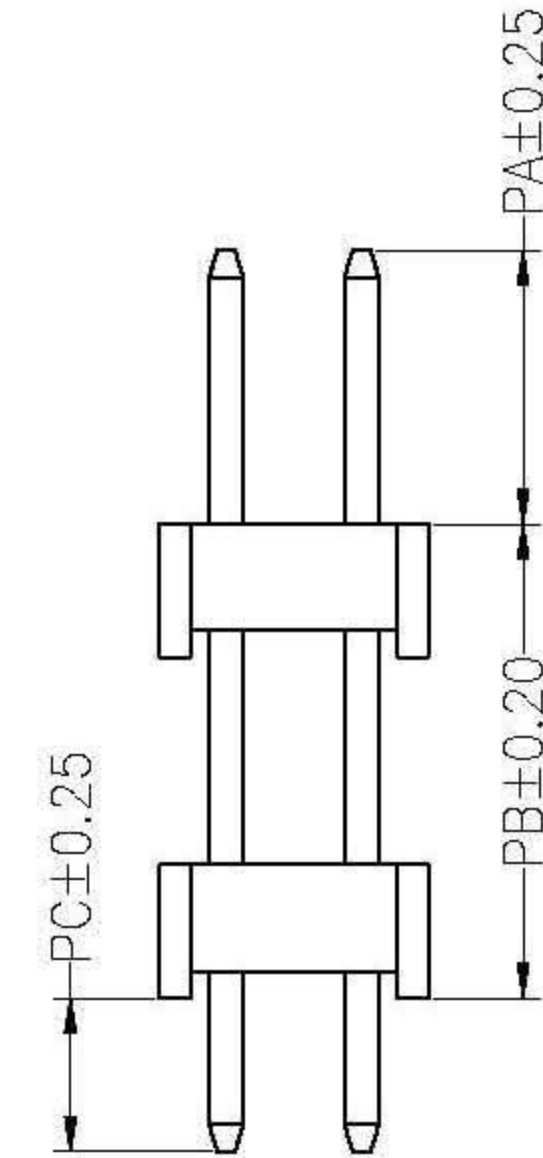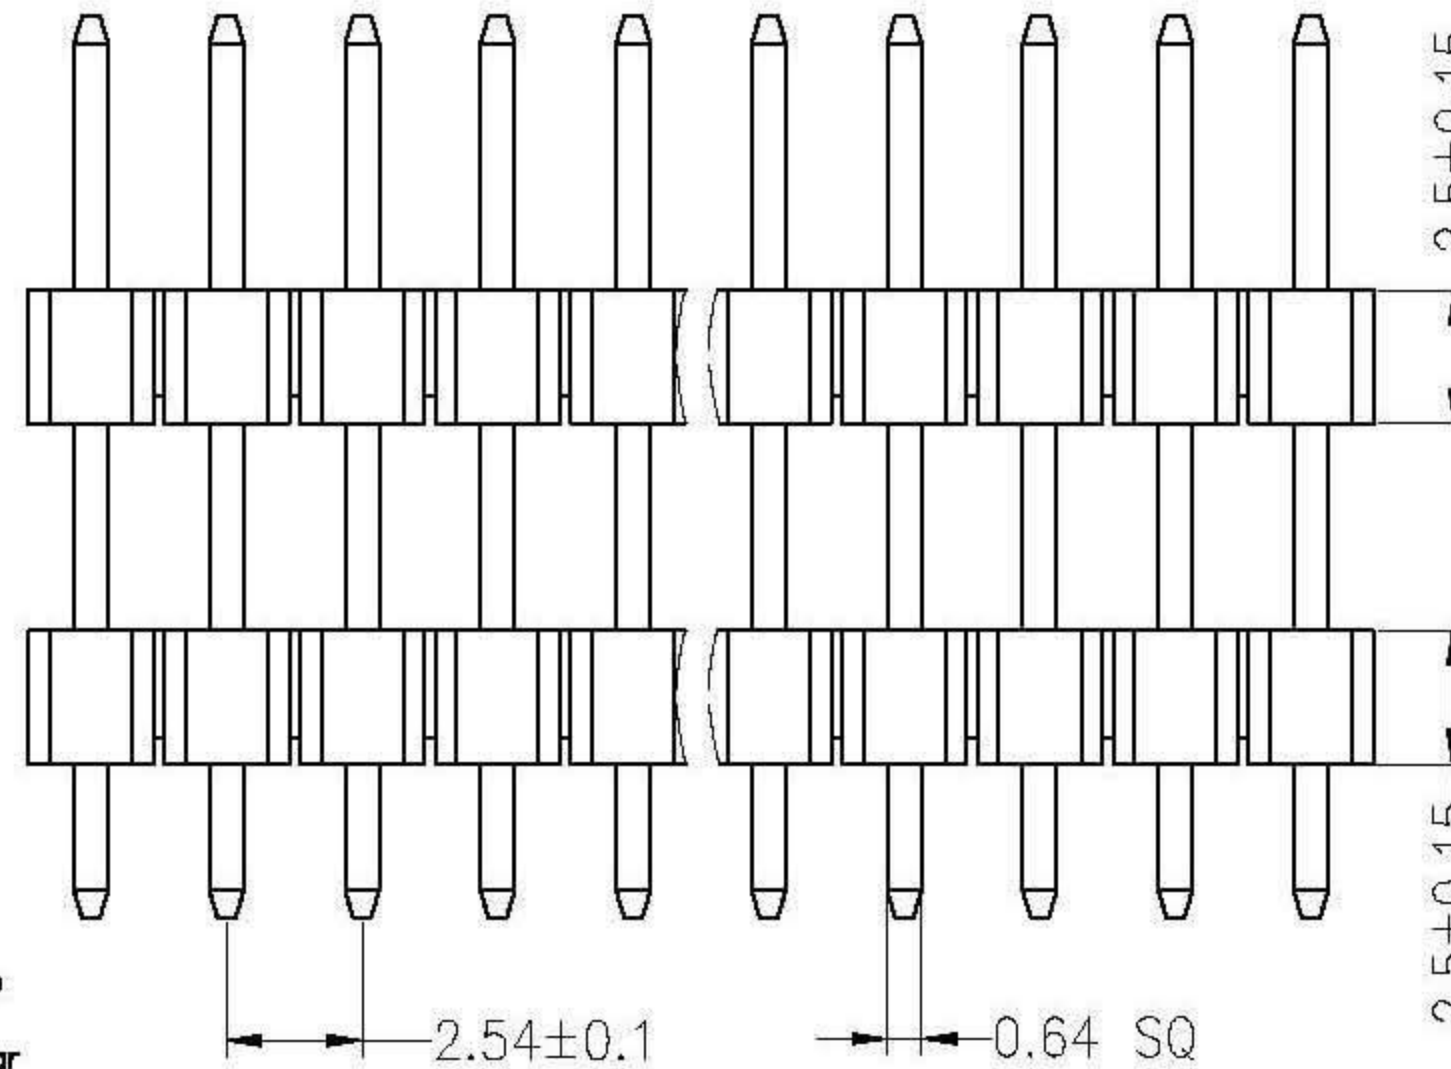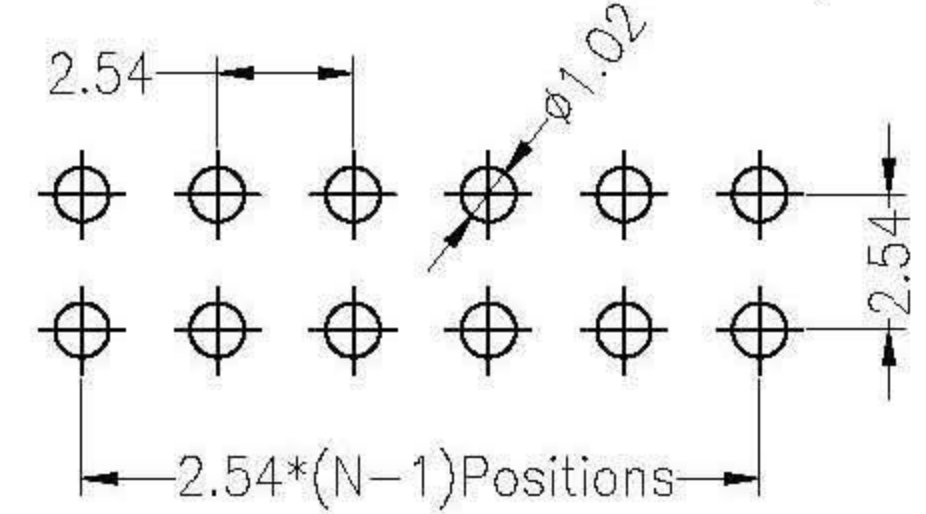

Dimension antitheses list				
ITEM	PC	PA	PB	L
Standard	3.00	6.00		
Alternate	3.00	6.00	7.00	16.00

Ordering Information

1225 - 11 XX X N XX S XXX X 01

- No.of Pins Per Row: 1x40, 1--40
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
- Contact Plating: G0:Gold Flash, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin, SN:Tin
- Pin Length
- Packing: O=PE Bag, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar

OPERATION

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW

YiYuSheng 12.04.18

CHECK

APPROVE

SCALE

FIT

UNIT

SIZE

SHEET

PROJ.

深圳市锦凌电子有限公司

PART NO.

1225-22XXXNXXSXXX01

TITLE:

2.54PH Dual Row Double Plastic 180°
H=2.5

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	YiYuSheng	12.04.18	SCALE	FIT	深圳市锦凌电子有限公司
				X.X				UNIT	mm	
				X.XX				SIZE	A4	
A0	2012.04.18	NEW DRAWING		X.XXX				SHEET	1/1	
				Angle				PROJ.	◆	