
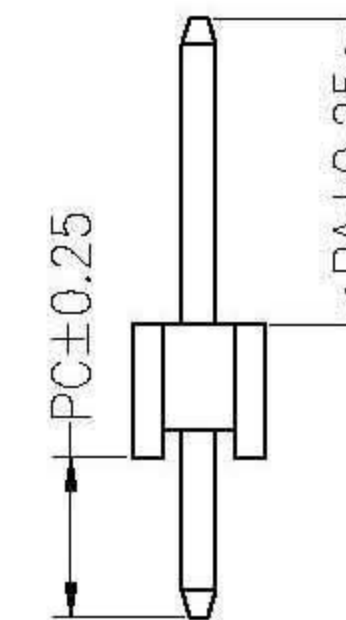
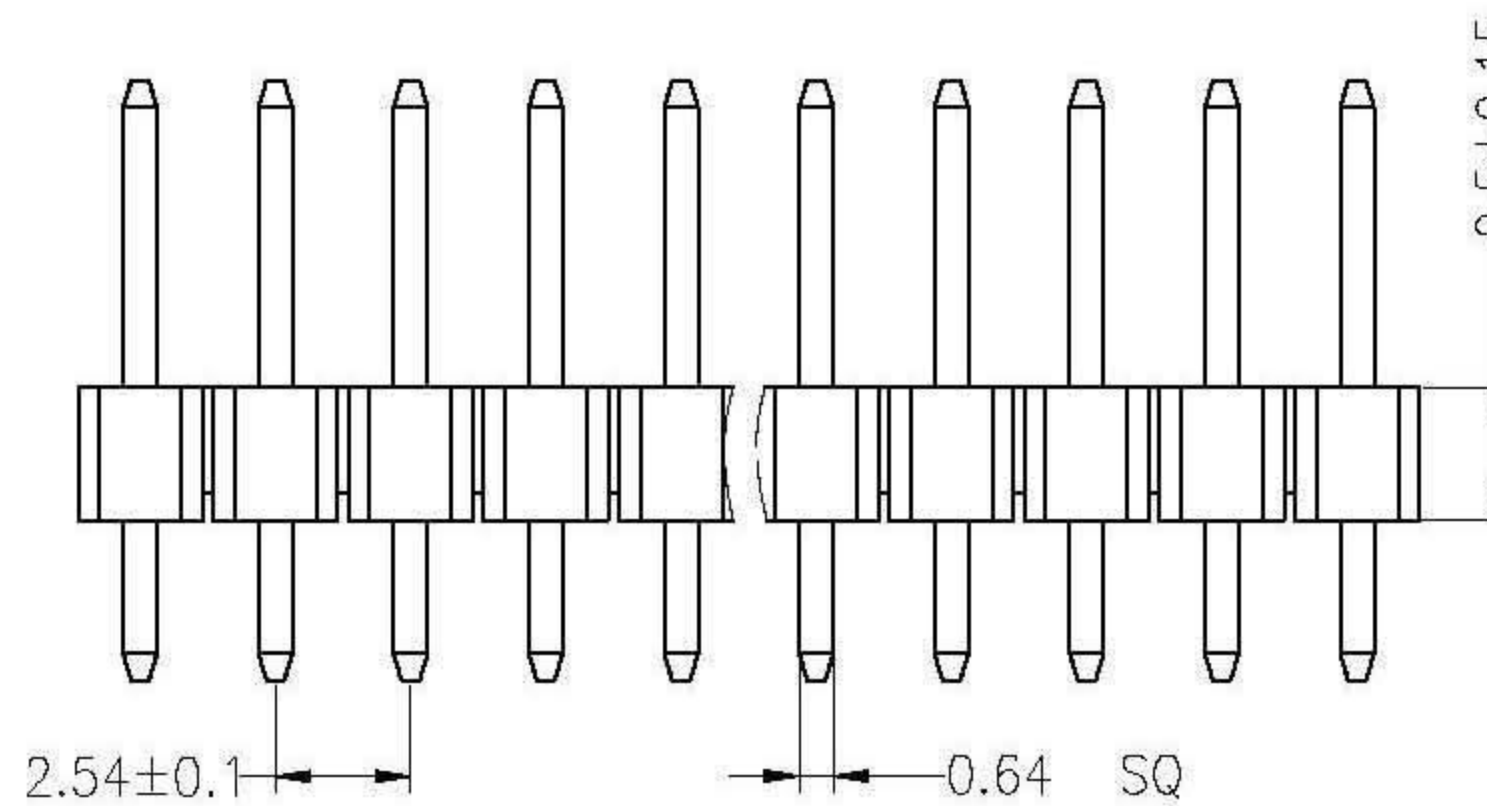
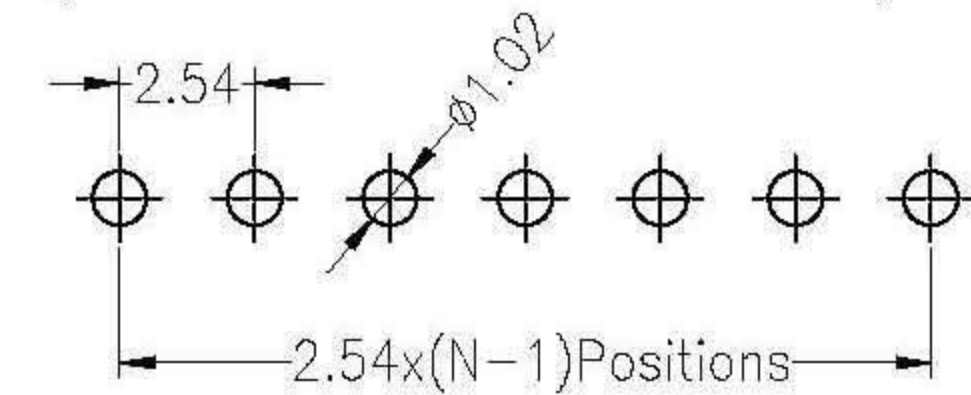


SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

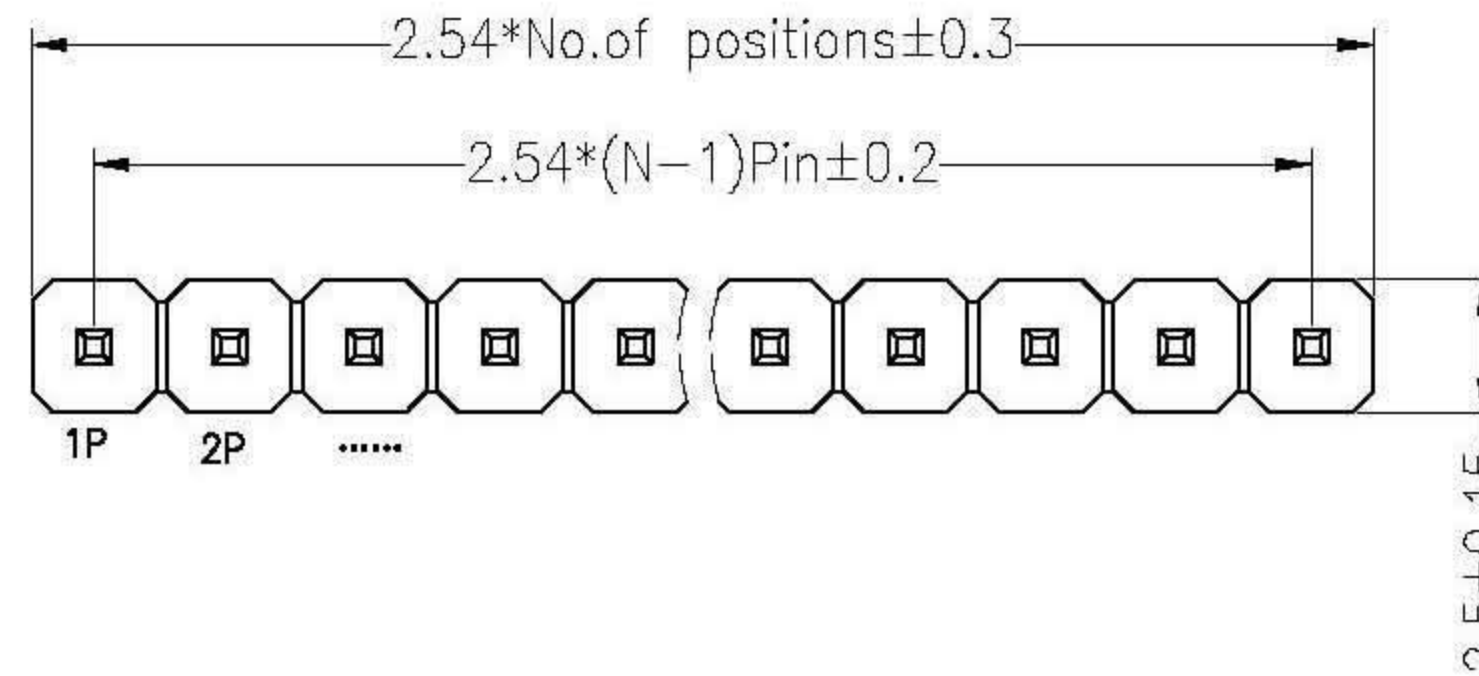

Ordering Information

1225 - 11 XX X N XX S XXX 01

No.of Pins Per Row 1x40
1--40
Insulator Material Option
A=BK-PBT
B=BK-PA66
C=BK-PA6T
D=BK-PA46
F=BK-LCP
Contact Plating
G0:Gold Flash
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
S0:Gold Flash/Tin
SN:Tin
Pin Length

Dimension antitheses list			
ITEM	PA	PC	L
Standard	6.00	3.00	11.50
Alternate			

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

YiYuSheng

12.03.28

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

CHECK

APPROVE

PART NO.

1225-11XXXNXXSXXX01

TITLE:

2.54mm Pin Header 2.5mm Single 180°

A

A