

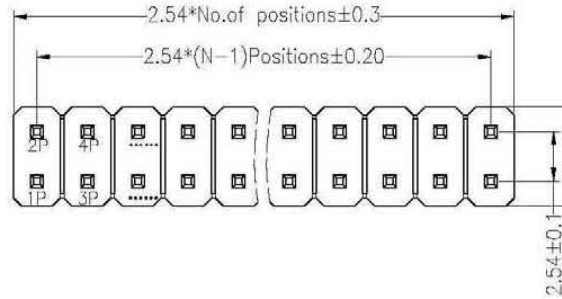
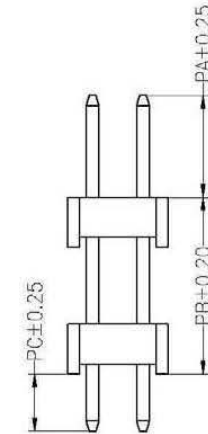


**SPECIFICATIONS**  
 Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

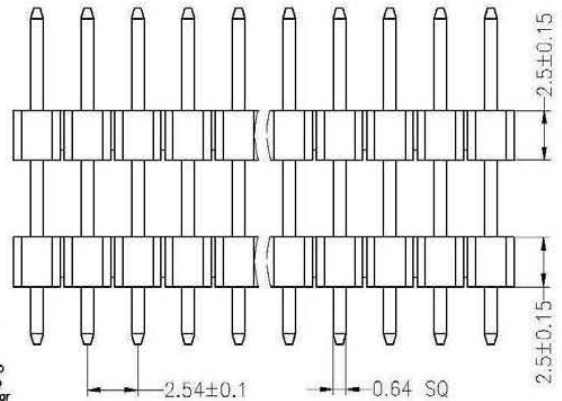

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)



**Ordering Information**

1225 - 11 XX X N XX S XXX X 01

No.of Pins Per Row 1x40  
 Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP  
 Contact Plating: G0:Gold Flash, G2:5U\* Gold, G3:10U\* Gold, G4:15U\* Gold, G5:30U\* Gold, S0:Gold Flash/Tin, SN:Tin  
 Pin Length  
 Packing: O=PE Bag, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar

Dimension antitheses list				
ITEM	PC	PA	PB	L
Standard				
Alternate	3.00	6.00	31.00	40.00

				OPERATION		DRAW		YYuSheng	12.04.18	SCALE	FIT	深圳市锦凌电子有限公司	
				X.X	±0.30					UNIT	mm		
				X.XX	±0.20	CHECK				SIZE	A4	PART NO. 1225-22XXXNXXSXXX01	
				X.XXX	±0.10					SHEET	1/1	TITLE: 2.54PH Dual Row Double Plastic 180° H=2.5	
AD	2012.04.18	NEW DRAWING		Angle	±3'	APPROVE				PROJ.			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL							