


Technical Specs:


Insulator: Black glass filled polyester PPS-GF30-FR
Flammability: UL 94V-O
Sleeve: Brass
Contact clip(4/6 finger): Beryllium copper(C17200)
Accepted pin: $\varnothing 0.40$ to 0.56mm
Forces: (polished steel gauge $\varnothing 0.43\text{mm}$)
 --Insertion 2 N typ
 --Withdrawal 1 N typ
Mechanical life: min500 cycles
Rated current: 3A
Contact resistance: max 10m Ω
Dielectric resistance: Min 1000V RMS
Coplanarity SMD max 0.1 mm(measured on terminations:
 25 mm long connectors)
Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

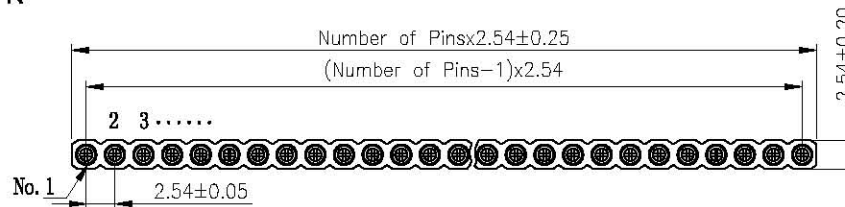


Ordering Information

3620- 30 1 XX 2 2 S 743 0X

No. of Pins 2-64P	Pin Plating code 1: Tin 150u" 2: Tin 200u" 3: Gold Flash 4: 2U"Gold 5: 3U"Gold 6: 10U"Gold S: special	Clip Plating code 1: Tin 150u" 2: Tin 200u" 3: Gold Flash 4: 2U"Gold 5: 3U"Gold 6: 10U"Gold S: special	Length 743=7.43mm
----------------------	--	---	----------------------

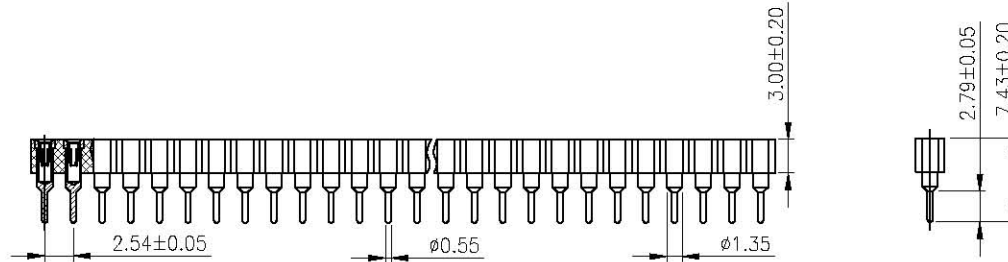

OPERATION		DRAW	WZG	14.04.01	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

JILN ELECTRONIC CO.,LTD		PART NO.	3620-301XX23S7430X
		TITLE:	2.54X3.0圆孔母座单排180° L=7.43

A0	2014.04.01	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE