
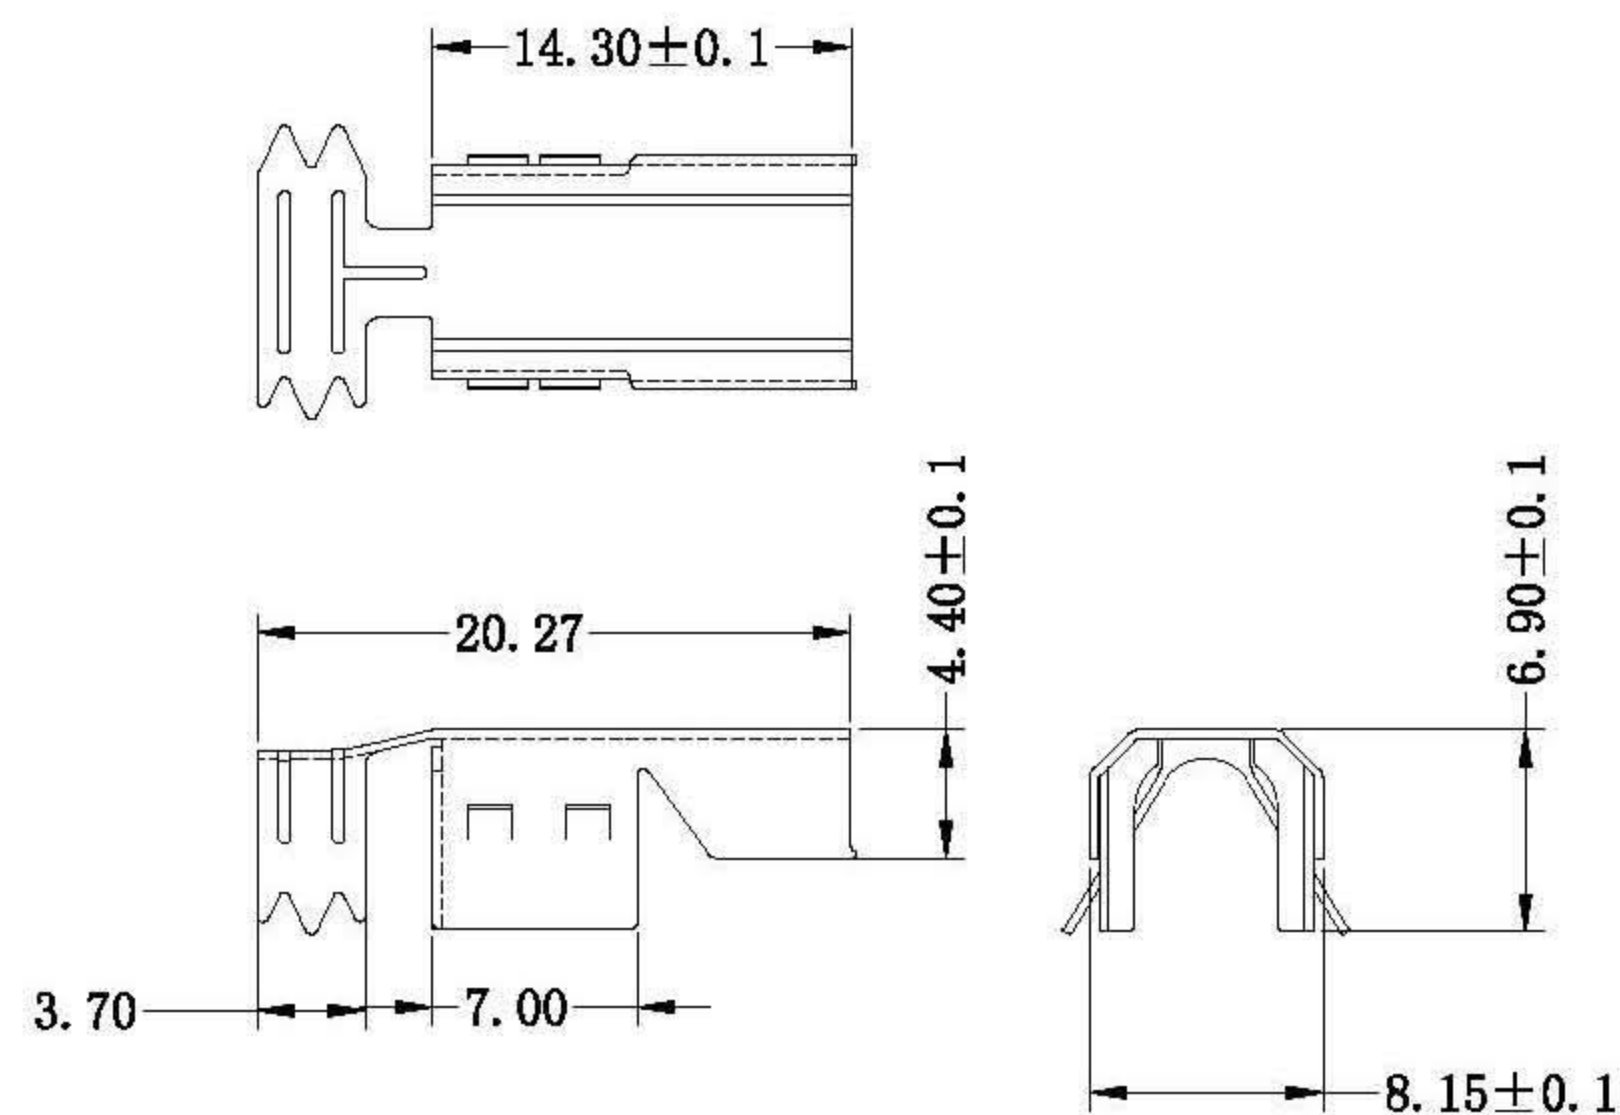
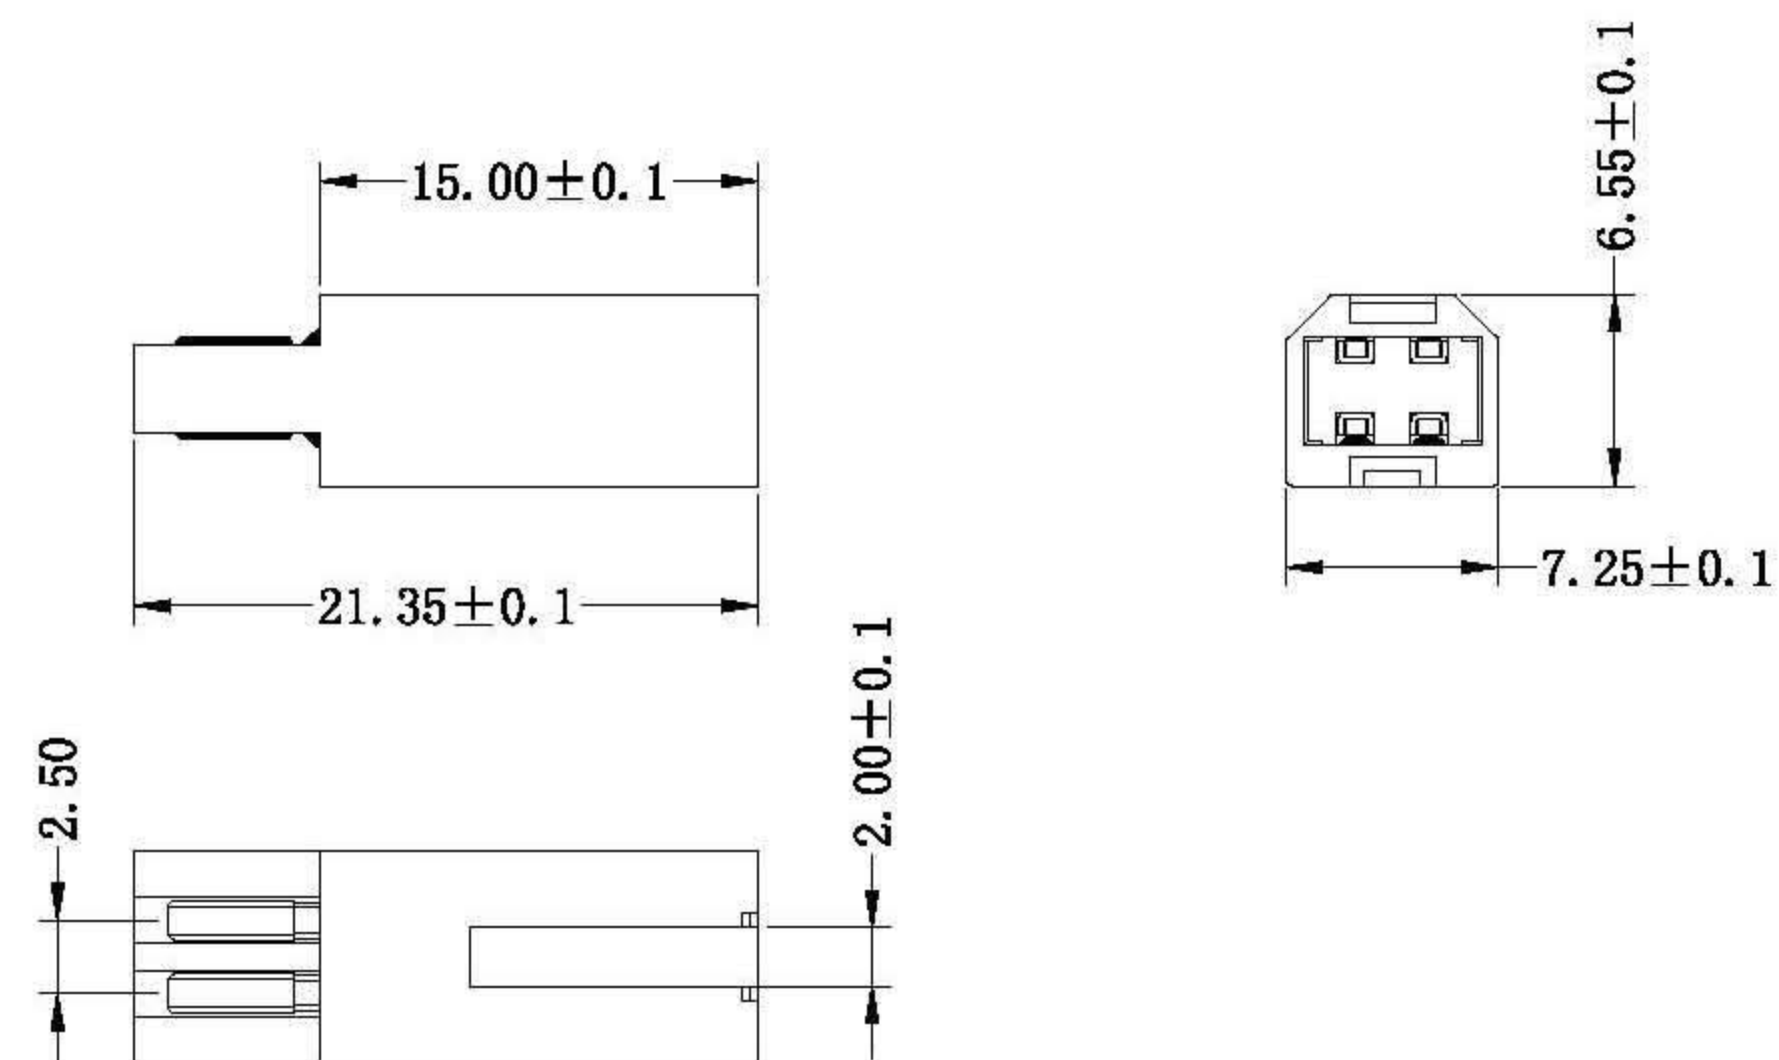


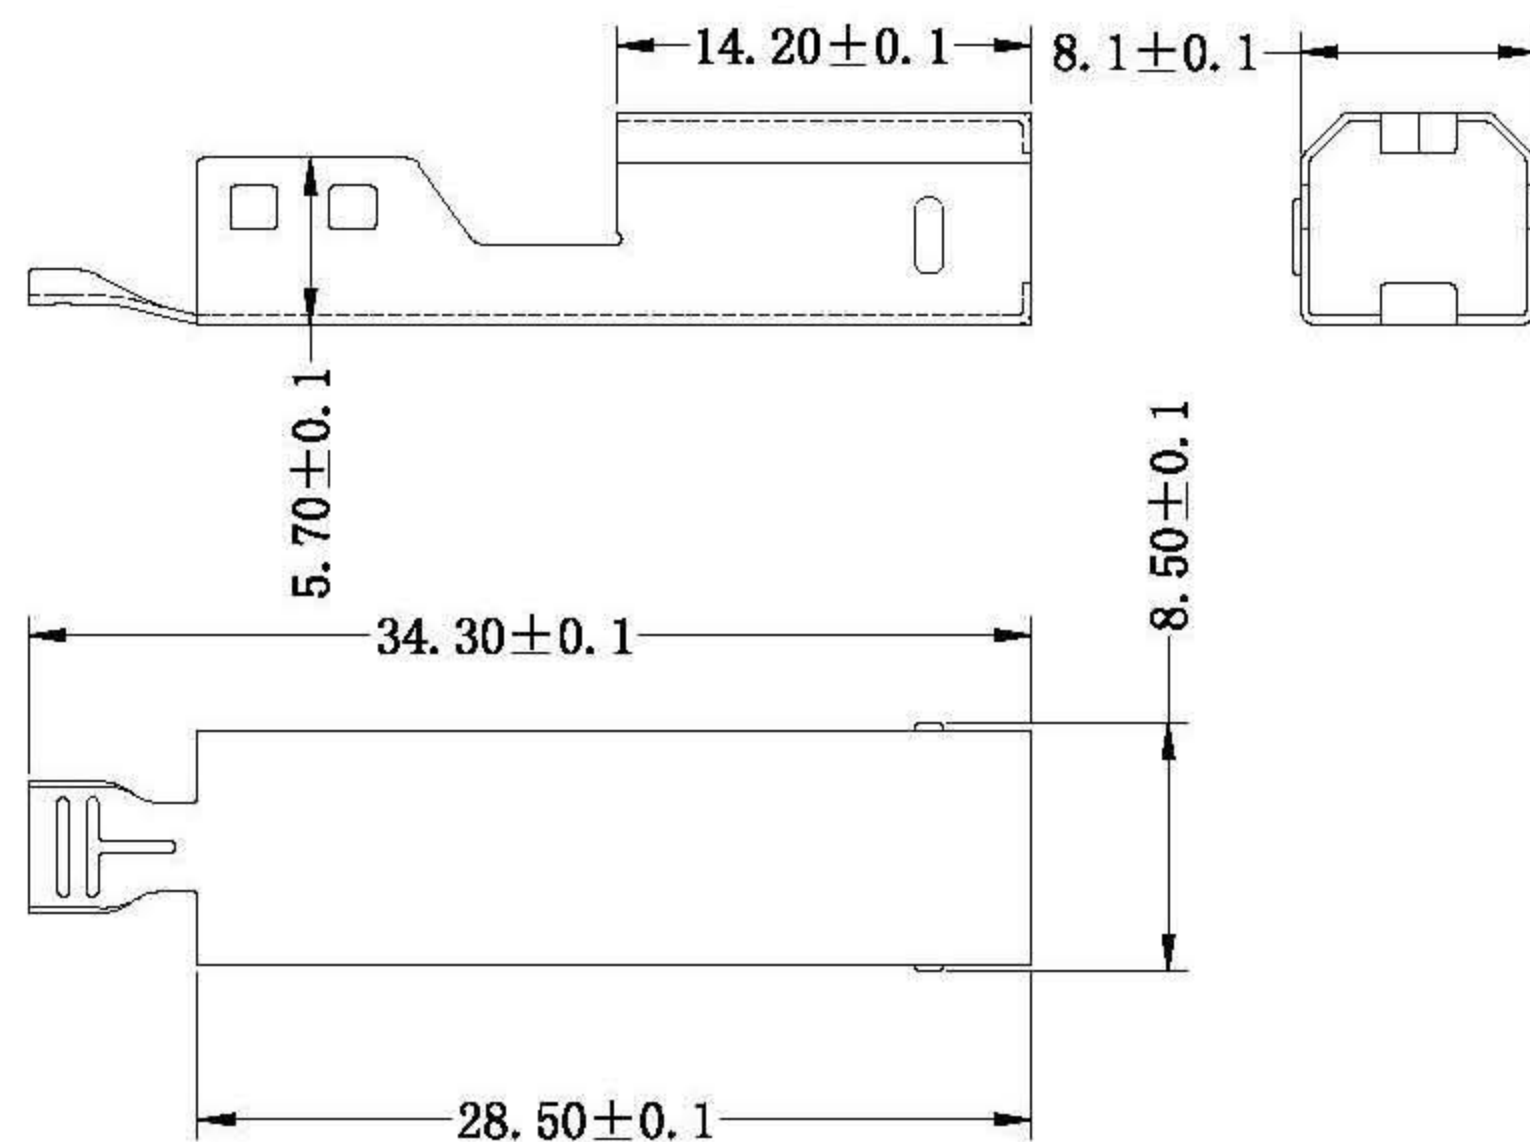

特性: Specifications:

电器:Electrical:

接触阻抗:Contact Resistance 30 milliohms MAX

耐电压:Dielectric Withstanding Voltage: 500 V AC AT Sea Level

绝缘阻抗:Insulation Resistance: 100 MEGA ohms MIN

材料:Material:

塑胶:PBT

端子:Contact: Copper Alloy 铜合金

铜壳:SPCC

电镀:Finish:

端子:Contact: Plated Gold in Mating Area;

Tin On Solder Talls

接触点镀金.脚镀锡

铜壳:Shell: Nickel/ Plating 镀镍

④					Unless otherwise specified tolerances are 未注尺寸公差	客户 Customer	编号 NO.			图号 Drawing NO.		设 计 Designed by		审 核 Checked by		批 准 Approved by		Third Angle Project 第三角投影 
③					X ±0.3	品名 Item	USB B公 三件套					装配图		冷中明				
②					XX ±0.2													
①	变 更 内 容 Midify content	签 名 Sign by	审 核 Checked by	日期 Date	XX ±0.1	版 本 REV	材质 Material	厚度 MAT. THICK	数量 Amount	表面处理	交 期	单位 Unit	比例 Scale					
					XX ±0.05													
					XXXX ±													
					ANGLES ±2° SURFACE TEXTURE 	A						mm	FREE					