
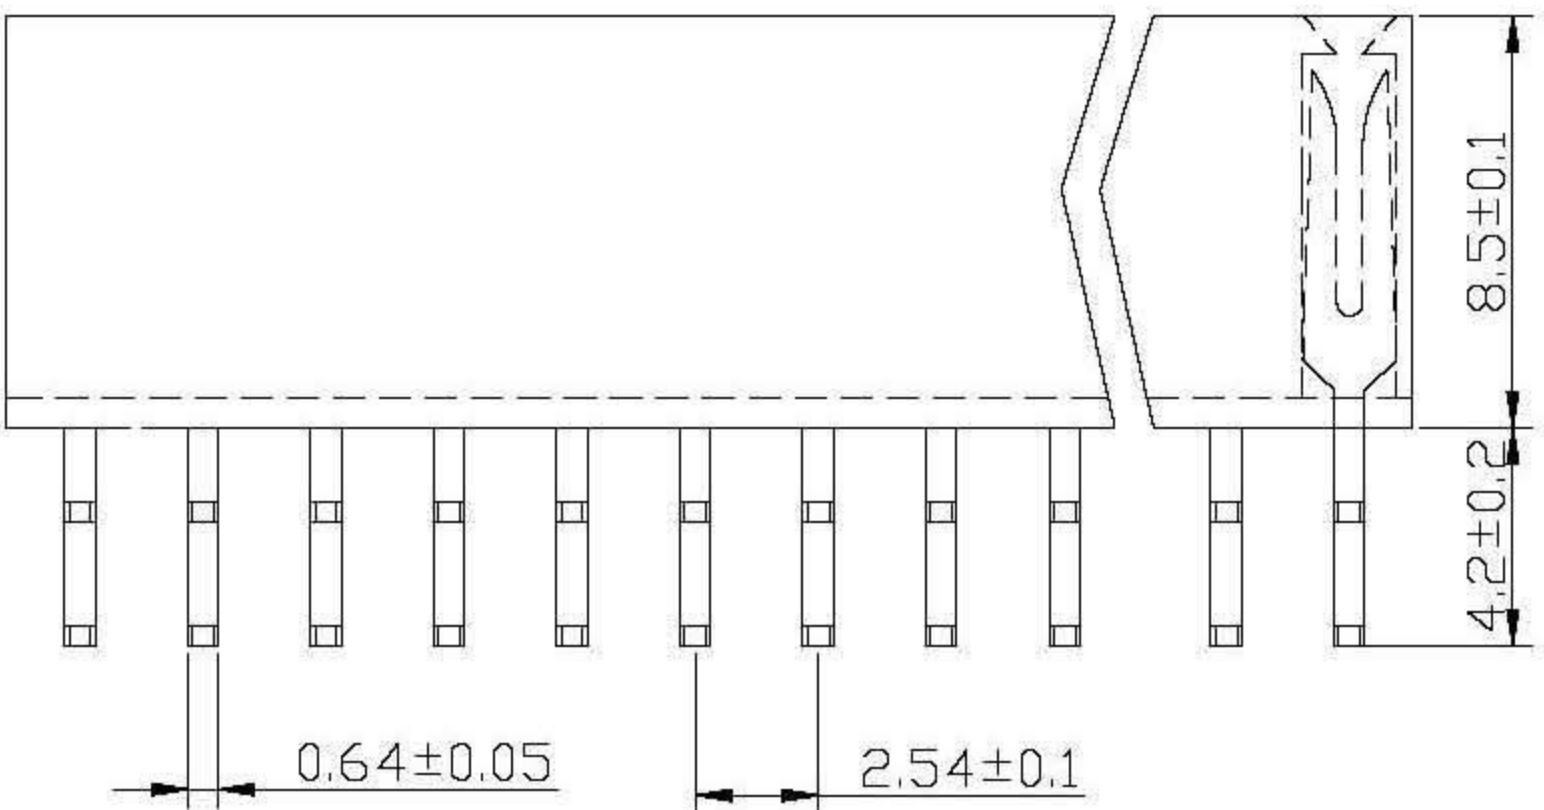




	1	2	3	4	5	6	7	8	9	
G										
F	No. of Contacts	DIMENSIONS								
		A	B							
		2	2.54	5.08						
		3	5.08	7.62						
		4	7.62	10.16						
		5	10.16	12.70						
		6	12.70	15.24						
		7	15.24	17.78						
		8	17.78	20.32						
		9	20.32	22.86						
E										
D										
C										
B										
A										
	1	2	3	4	5	6	7	8	9	

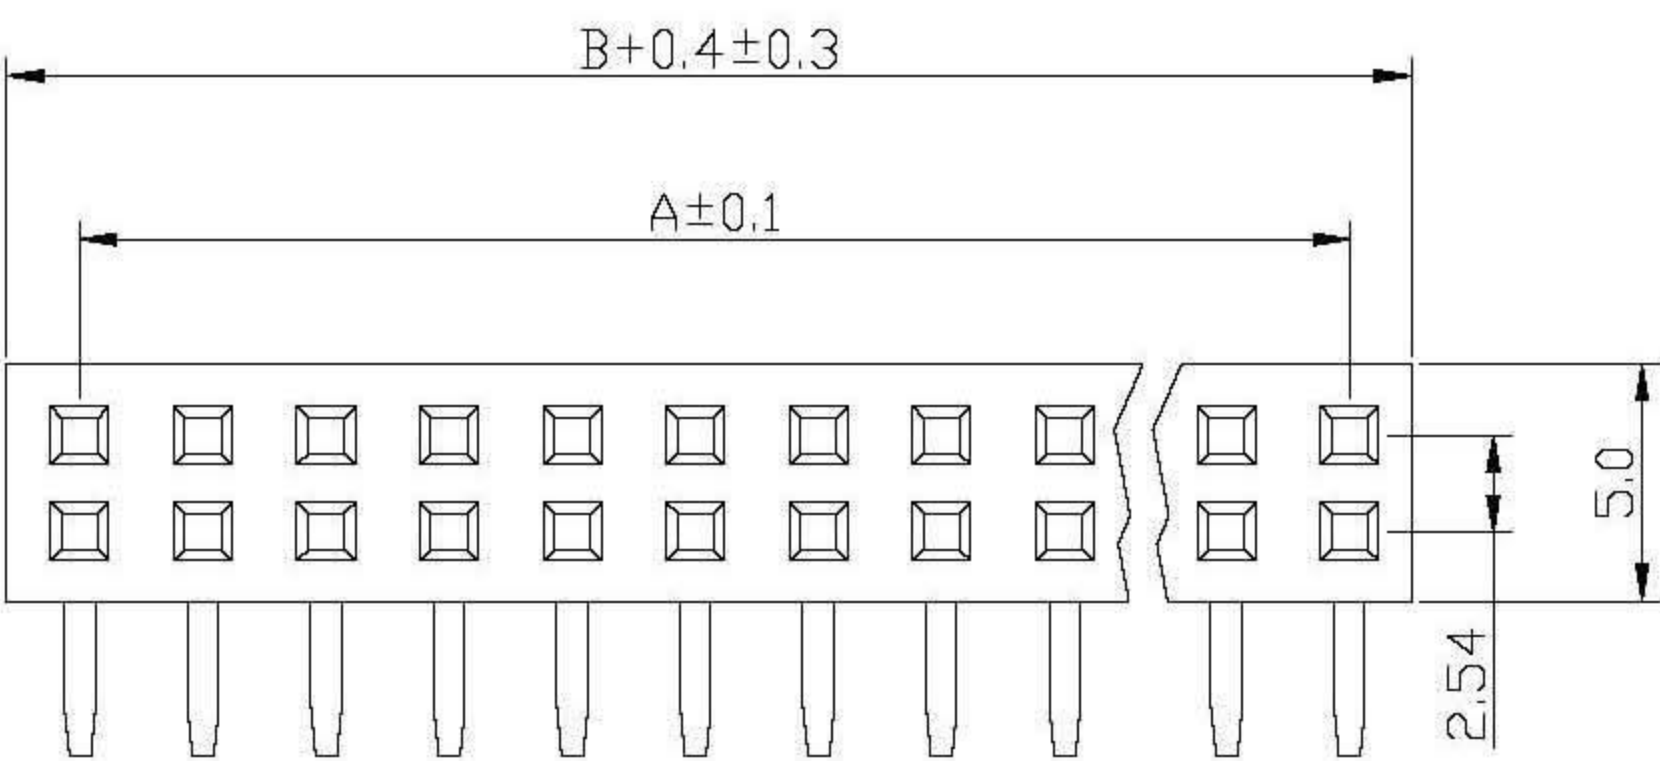

检验以此为准！

SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature: -40°to+105°
Contact Material: Brass
Insulator Material: Polyester(UL 94V-0)
Standard: PBT

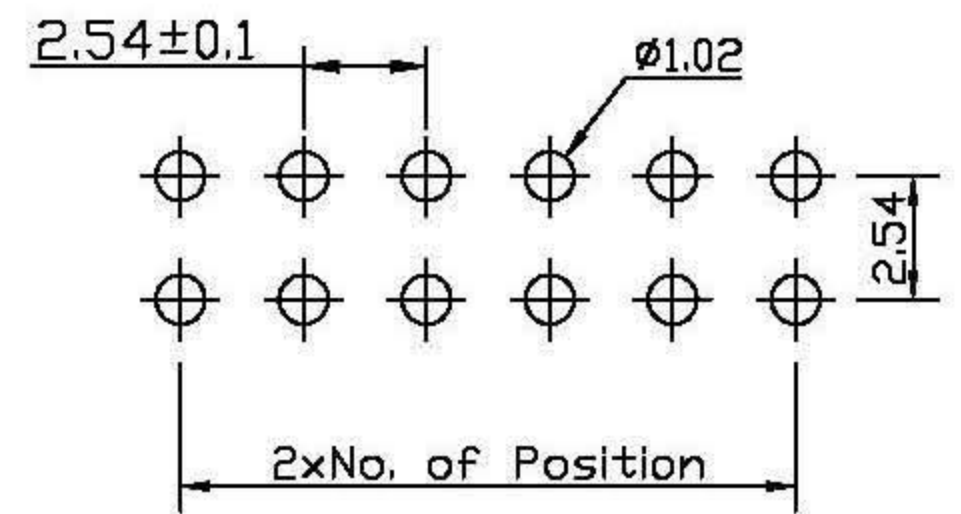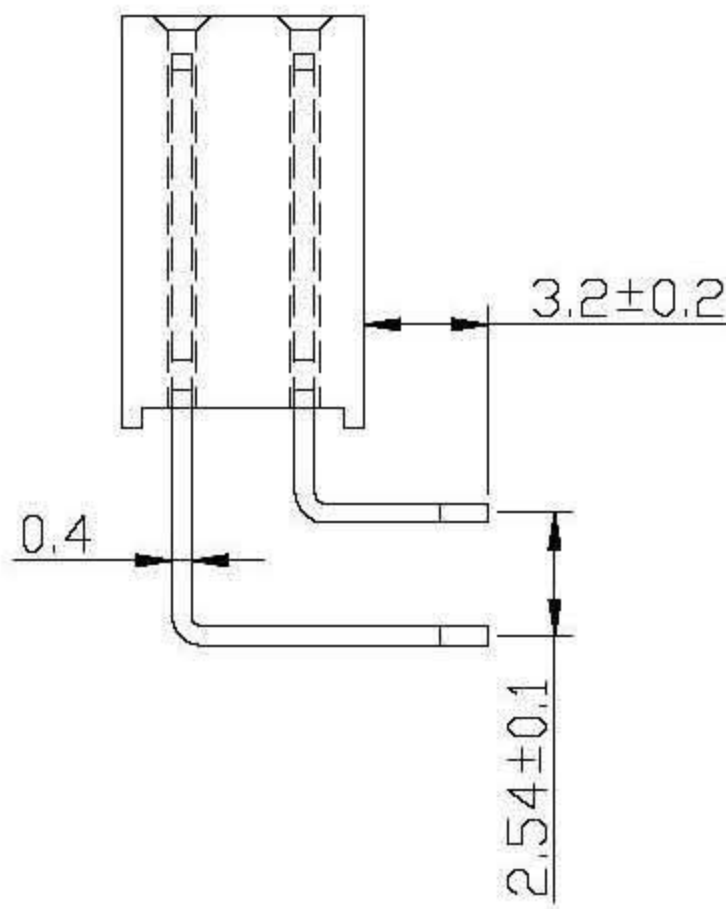

Recommended P.C.B Hole Layout

UNLESS OTHERWISE SPECIFIED TOLERANCE					
x.	±0.3	x.*	±5°		
x.x	±0.2	x.x*	±1°		
x.xx	±0.1	x.xx*	±0.5°		
SCALE		UNIT			
		mm			
DRAWN		20/11/09		DRAWN NAME	
LI BEI LIN				2.54 Female Header	
CHECKED					
APPROVED		/ /		PRODUCT NO.	
		SIZE A4 REV A		FILE NAME:	