

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PBT
Max.Processing Temp: 180°C for 30−60 seconds
(200°C for 10 seconds)

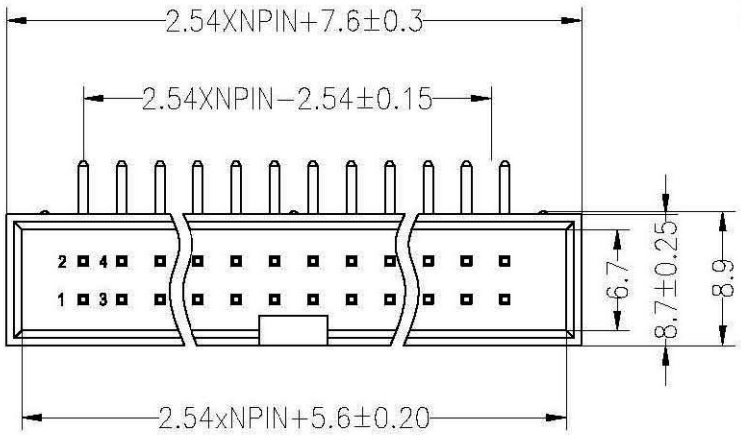


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

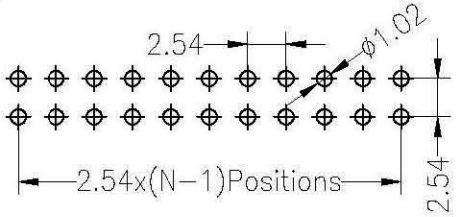


Ordering Information

3210- XX R XX X B K00 01

No.of Pins Per Row 6--64	Contact Plating G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin	Insulator Material Option A=BK−PBT B=BK−PA66 C=BK−PA6T D=BK−PA46 F=BK−LCP

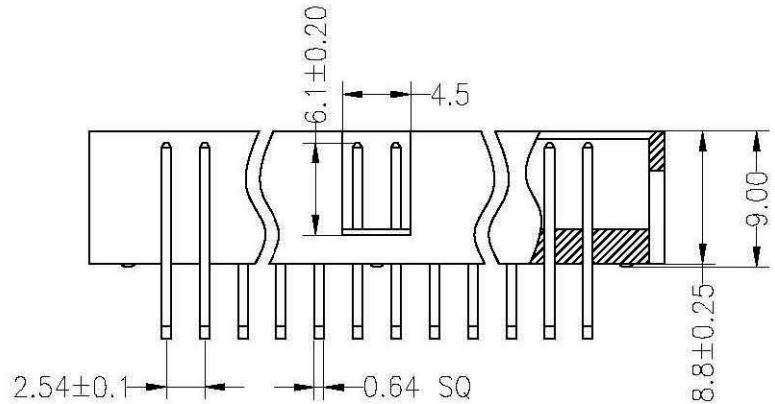

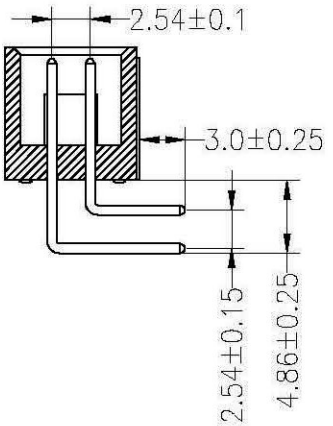

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
B	2013.08.15	变更产品针长,将原来的L=16.5/21.5改成,L=16.0/21.0	YIYUSHENG
A	2012.09.10	NEW DRAWING	

OPERATION		DRAW	YiYuSheng	13.08.15
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO.	3210−XXRXXXBK0001
TITLE:	B 2.54mm Box Header H8.8mm 90° L=16.0/L=21.0