


Lift Principle

AK(Z) 1550

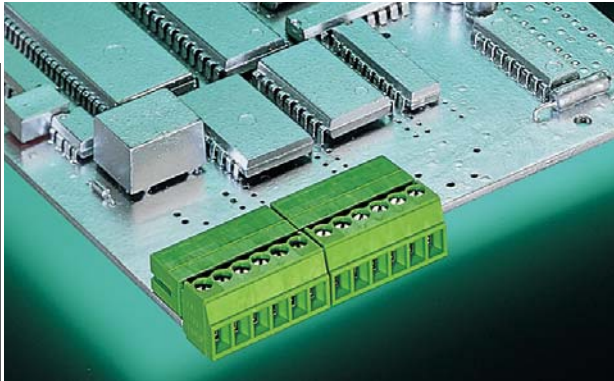

AK(Z) 1550/.. - 3.5 (3.81) - GREEN


also available: ..L

2-20 poles, Spacing 3,5 mm and 3,81 mm

insert required no. of poles ..

How to order see page 11

AK(Z) 1550

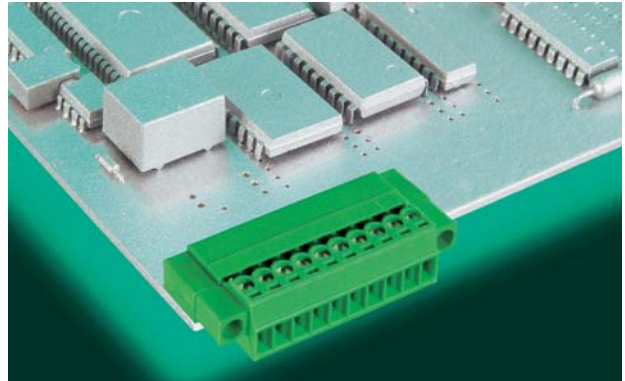

AK(Z) 1550/.. F - 3.5 (3.81) - GREEN



also available: ..FL

2-20 poles, Spacing 3,5 mm and 3,81 mm

insert required no. of poles ..

How to order see page 11

Ratings:

		
Rated Voltage	300 V	160 V
Rated Current	8 A	9 A (T60)
Overvoltage Category		III
Wire Size	AWG 28-16	1,5 mm ²
Rating Impulse Voltage/Dirt Level		2,5 kV/3
Rated Torque / Screw Size		0,4 Nm/M2

Max. Rated Cross Section

Single Wire (solid)	1,5 mm ²
Stranded Wire (flexible)	1,0 mm ²
Stranded wire with Ferrules	1,0 mm ²



Dimensions

Spacing	3,5 mm (3,81 mm)
Stripped Length	7,0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuSn
Colour	green
	RAL 6018

Ratings:

		
Rated Voltage	300 V	160 V
Rated Current	8 A	9 A (T60)
Overvoltage Category		III
Wire Size	AWG 28-16	1,5 mm ²
Rating Impulse Voltage/Dirt Level		2,5 kV/3
Rated Torque / Screw Size		0,4 Nm/M2

Max. Rated Cross Section

Single Wire (solid)	1,5 mm ²
Stranded Wire (flexible)	1,0 mm ²
Stranded wire with Ferrules	1,0 mm ²


Dimensions

Spacing	3,5 mm (3,81 mm)
Stripped Length	7,0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuSn
Colour	green
	RAL 6018

AK(Z) 1550

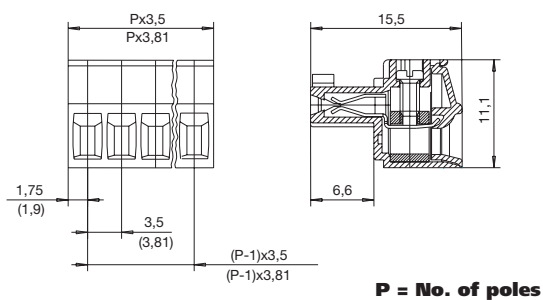

AK(Z) 1550 Flange

