
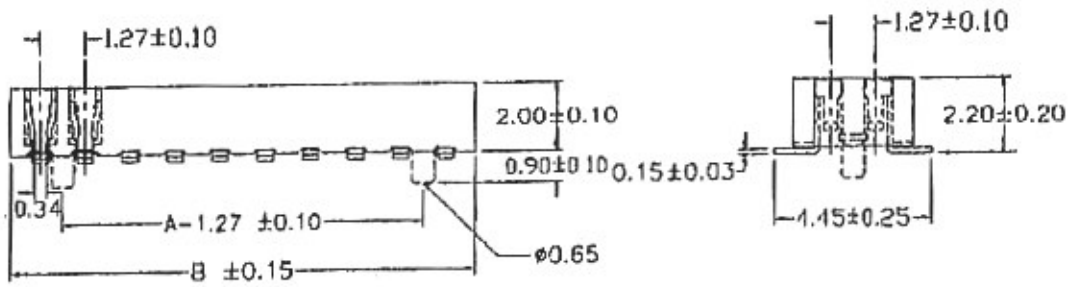


A
B
C
D
E
F
G
H

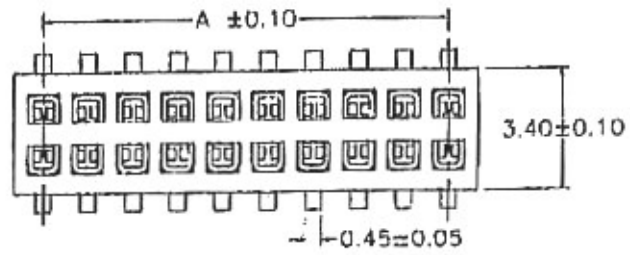


SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Contacts resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating temperature: -40°~+105°C
 Max Processing temp: 230° for 30 seconds
 Contact Material: Phosphor bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0

Finish: Gold plated
 Ⓢ Standard: Gold flash all over

Recommended P.C.Board
 SMD Layout

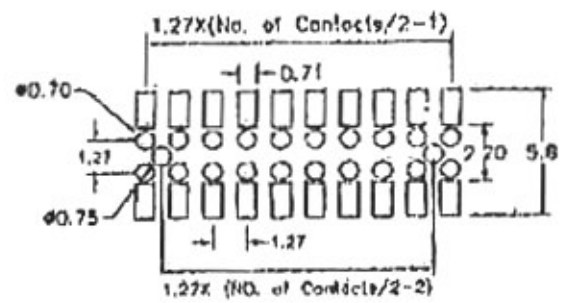

No. of Contacts	DIMENSIONS	
	A	B
06	2.54	4.21
08	3.81	5.48
10	5.08	6.75
12	6.35	8.02
14	7.62	9.29
16	8.89	10.56
18	10.16	11.83
20	11.43	13.10
22	12.70	14.37
24	13.97	15.64
26	15.24	16.91
28	16.51	18.18
30	17.78	19.45
32	19.05	20.72
34	20.32	21.99
36	21.59	23.26
38	22.86	24.53
40	24.13	25.80
42	25.40	27.07
44	26.67	28.34
46	27.94	29.61
48	29.21	30.88
50	30.48	32.15
52	31.75	33.42
54	33.02	34.69
56	34.29	35.96
58	35.56	37.23
60	36.83	38.50
62	38.10	39.77
64	39.37	41.04
66	40.64	42.31
68	41.91	43.58
70	43.18	44.85
72	44.45	46.12
74	45.72	47.39
76	46.99	48.66
78	48.26	49.93
80	49.53	51.20
82	50.80	52.47
84	52.07	53.74
86	53.34	55.01
88	54.61	56.28
90	55.88	57.55
92	57.15	58.82
94	58.42	60.09
96	59.69	61.36
98	60.96	62.63
100	62.23	63.90

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE	PART NAME	
MM		2:1	1.27X1.27mm FEMALE HEADER DUAL ROW H=2.0mm	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		±0.5	C4829-XXBDGHXT	A

制表日: 2002/12/04
 DRAWING: Angus
 APPROVED:

1 2 3 4 5 6 7 8