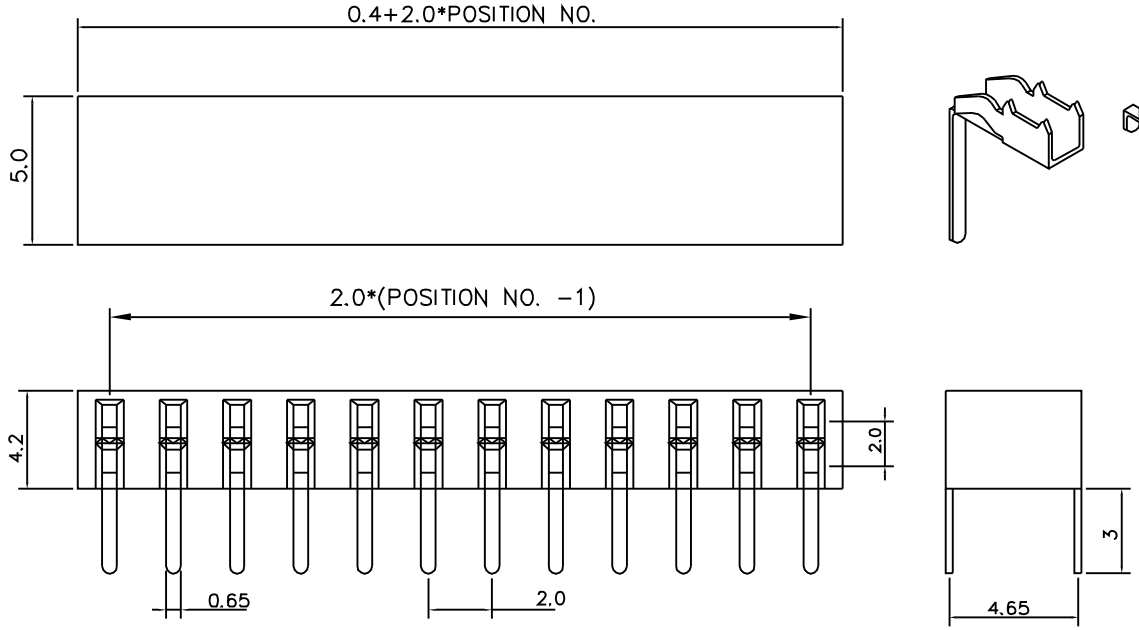

MATERIAL
INSULATOR-PBT (UL94V-0)
CONTACT-COPPER ALLOY
SPECIFICATIONS
CURRENT RATING
1 AMP DC
CONTACT RESISTANCE
15 MILLIOHM MAX
INSULATION RESISTANCE
500 MEGOHM MIN
DIELECTRIC VOLTAGE
500V AC FOR ONE MINUTE
OPERATING TEMPERATURE
-40℃ TO 105℃

ORDER INFORMATION

	Contact No.	Row Type	Contact Type	Contact Plating	Insulator Height		
C6814 —	04	B	I	G	H	0	0
	04~50 (2X2~2X25)	B: Dual Row	I: Side Entry	T: Tin S: Selective Gold G: Gold Flash	H: 4.2mm	Fill It With "0"	Fill It With "0"

玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.			UNIT	SCALE	PART NAME	
			MM	2 : 1	P:2.0 FEMALE HEADER PROFILE: 4.2MM SIDE-ENTRY TYPE	
制表日:2000/06/07	DRAWING.	APPROVED	APPD.	CKD.	TOLERANCE	PART NO.	REV.
	RANDY	TINA			± 0.5	C6814-XXBIXH00	A

PDF created with pdfFactory trial version www.pdffactory.com