




**MATERIAL**  
 INSULATOR-PBT (UL 94V-0)  
 CONTACT-COPPER ALLOY

**SPECIFICATIONS**  
 CURRENT RATING  
 1 AMP DC  
 CONTACT RESISTANCE  
 30 MILLIOHM MAX  
 INSULATION RESISTANCE  
 1000 MEGOHM MIN  
 DIELECTRIC VOLTAGE  
 500V AC FOR ONE MINUTE  
 OPERATING TEMPERATURE  
 -40°C TO 105°C

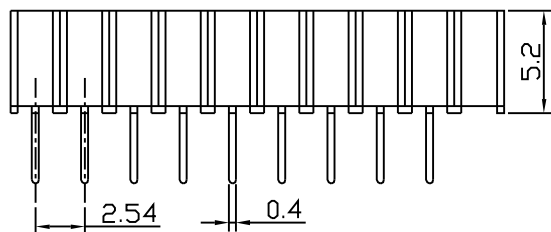

**ORDER INFORMATION**

C2803-	Contact No. A0	Row Type B	Contact Type S	Contact Plating G	Insulator Height H	0 Fill It With '0'	0 Fill It With '0'
	02(1x2)~50(1x50) 04(2x2)~100(2x50) *100=A0	A: Single Row B: Dual Row	S: Straight	T: Tin S: Selective Gold G: Gold Flash	H: 5.2mm		

**玄茂科技股份有限公司**  
**HSUAN MAO TECHNOLOGY CO., LTD.**

UNIT

SCALE

PART NAME

MM

1:1

2.54mm FEMALE HEADER  
 STRAIGHT H=5.2mm

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日:2002/12/15

DRAWING.

APPROVED

± 0.3

C2803-XXXSXH00

A

Jane