


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 P.B.T

Recommended P.C.Board
 Hole Layout

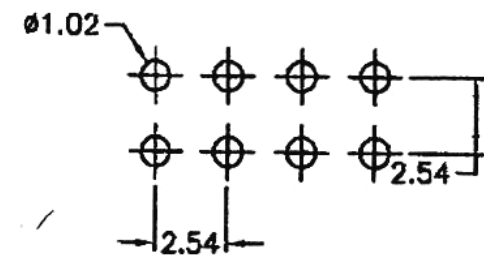

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE	PART NAME	
MM		2:1	2.54mm Female Header H=11.0mm 180° Pin =3.2mm	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		±0.3	C2822-XXBSXHA0	A

制表日: 2004/1/04

DRAWING. APPROVED

kevin