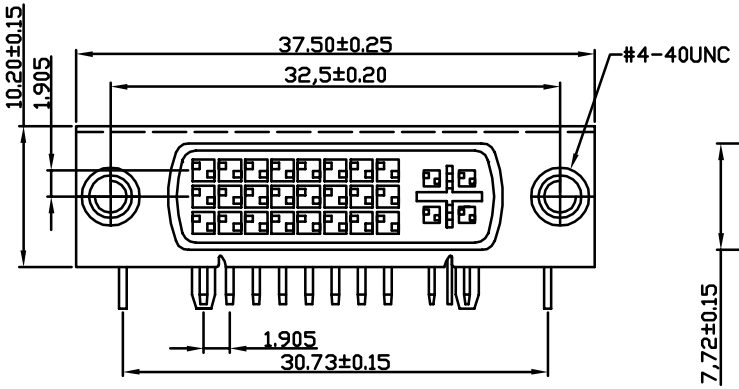

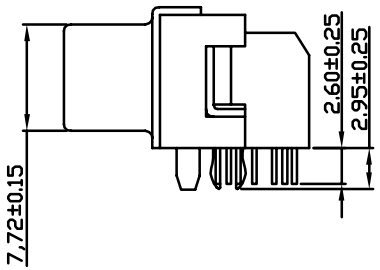

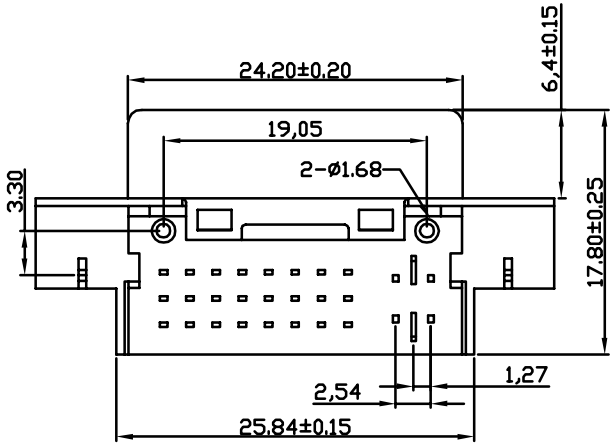



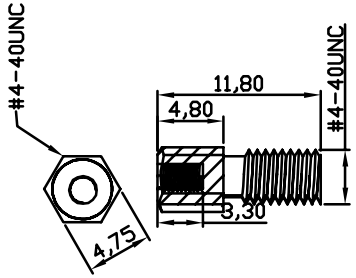

Specifications:
Current Rating : 3.0A AC/DC
Voltage Rating : 40V AC/DC
Contact Resistance : 20m ohm Max
Insulation Resistance : 1000M ohm Min
Withstanding Voltage : 500V AC for one minute
Operating Temperature Range :−20°C to +85°C
Materials:
Body:Nylon9T UL 94V−0 rated color white
Latch:Nylon9T UL 94V−0 rated color white
Contacts:phosphor bronze
Contact plating:gold plating over nickel on contact arer tin/lead plating
Mchsnicsl Charcteristic:
Mating Force:4.5KG Max. Spec:25mm/minute
Unmating Force:1.0KG~4.0kg. spec:25mm/minute
Contact retention to housion 0.45kg(min)
Durability: 100 mating cycles

How To Order
5518R−24−5M15
Analog Type
No.Of Positions

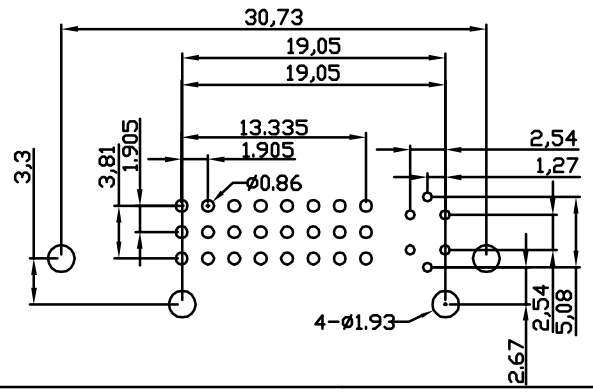

				DRAWN: Hero	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	繼德工業股份有限公司 Neltron Industrial Co., Ltd.	
				CHECKED: Jeremy Liu	UNIT: MM	DESCRIPTION: DVI R/A ANALOG TYPE CONNECTOR	SIZE A4
				APPROVAL: Mike Wu	SCALE: 1:1		
A	Jun−08−2004	(ZH)	Hero		SHEET: 1 / 1	PART NO: 5518R−24−5M15	
REV	DATE	FILE	BY		PROJECTION:		