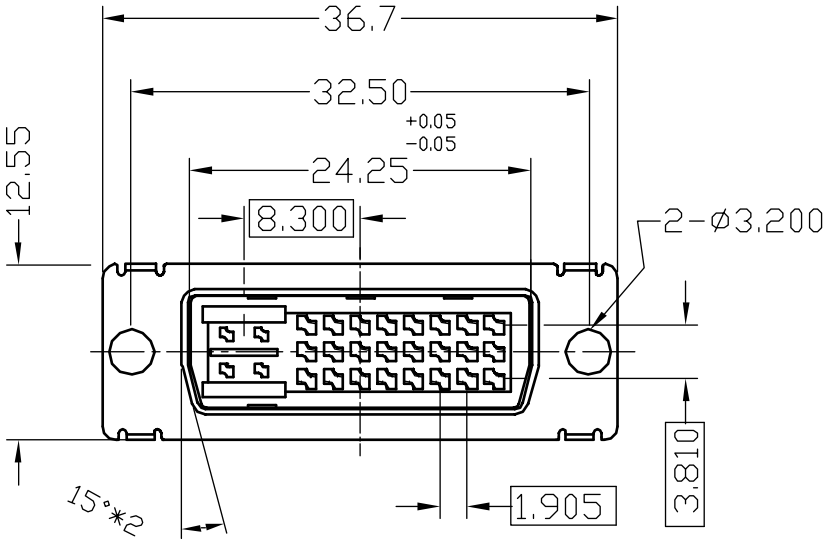

ELECTRICAL

VOLTAGE RATING: 250 VAC R.M.S.
CURRENT RATING: 1 AMP.
INSULATION RESISTANCE: 2000 MEGOHMS Min.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC (R.M.S.)
CONTACT RESISTANCE: 30mohm MAX. (INITIAL)

ENVIRONMENTAL

TEMPERATURE RANGE: −55°C TO + 85°C

ALL DIMENSION ARE IN mmS.

GENERAL TOLERANCE: +0.25/−0.25mm.

MATERIALS

INSULATOR: PBT. RATE 94V−0.
CONTACT: BRASS.
SHELL: SPCD.

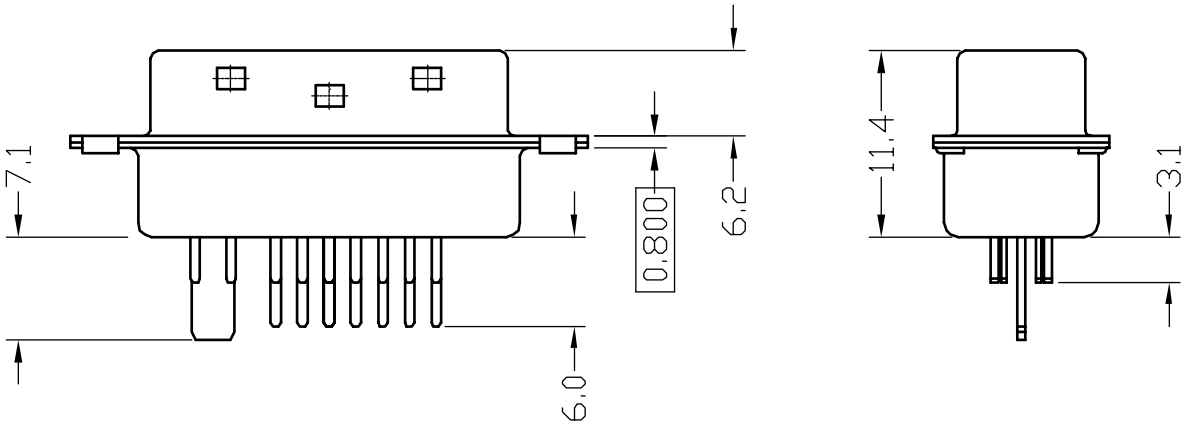

REV	DATE	FILE	BY
E			
D			
C			
B			
A	07−22−2003	5517−24−5M (GY5)	Jerry Chen

DRAWN: Jerry Chen

CHECKED: Ruby

APPROVAL: Mike

GENERAL TOLERANCE: ±0.2

UNIT: MM

SCALE:

SHEET: 1 / 1

PROJECTION:

繼德工業股份有限公司
Neltron Industrial Co., Ltd.

DESCRIPTION: DVI 24+5 Solder

SIZE: A4

PART NO: 5517−24−5M