
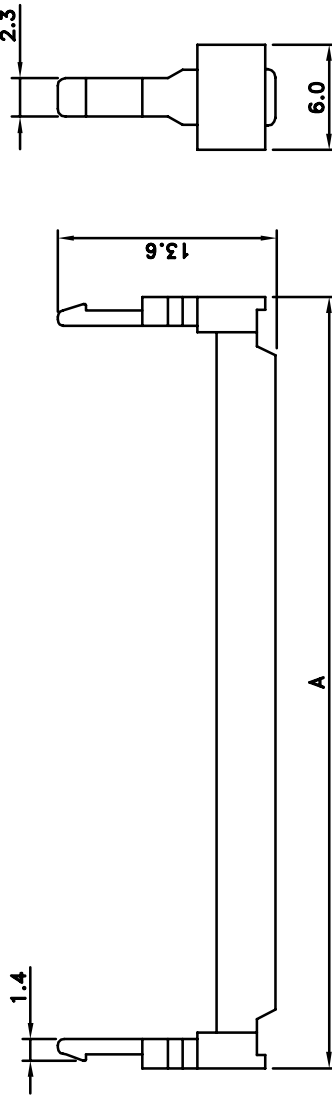



**SPECIFICATION:**

CURRENT RATE: 1A  
 INSULATOR RESISTANCE: 1000M OHM MIN OF 500V DC  
 CONTACT RESISTANCE: 20mOHM MAX OF 6V DC 0.3A  
 VOLTAGE: 500V AC FOR ONE MINUTE.  
 OPERATING TEMPERATURE: -40°C~105°C  
 MATERIAL  
 INSULATOR: PBT +30% GLASS FIBER (UL94V-0)  
 CONTACT: BRASS  
 PLATED: Selective gold over nickel

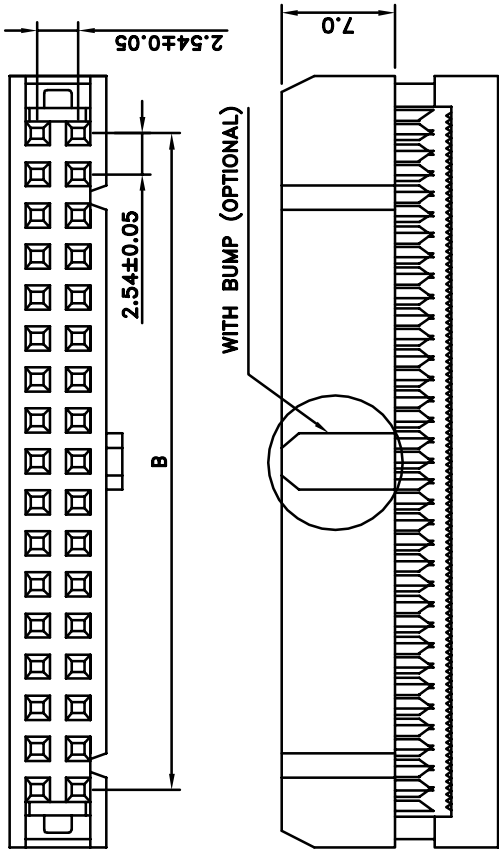

CIRCUITS	DIM. A	DIM. B	CIRCUITS	DIM. A	DIM. B
6	12.18	5.08	26	37.70	30.48
8	14.72	7.62	30	42.70	35.56
10	17.40	10.16	34	47.84	40.64
12	19.80	12.70	40	55.58	48.26
14	22.45	15.24	50	68.14	60.96
16	25.08	17.78	60	81.04	73.66
20	30.20	22.86	64	85.84	78.74
24	35.04	27.94			

A

B

C

D

**GENERAL TOLERANCE:**

.X = ±0.2  
 .XX = ±0.15

**DRAWN:**  
Jerry Chen

**CHECKED:**  
Jeremy

**APPROVAL:**  
Mike

E					
D					
C	04-FEB-2004	Material	Jerry Chen		
B	15-DEC-2003	PLATED	Jerry Chen		
A	12-03-1998	4401-XXSR	Jerry Chen		
REV	DATE	FILE	BY		



**繼德工業股份有限公司**  
**Neltron Industrial Co., Ltd.**

**DESCRIPTION:**

IDC SOCKET

SIZE

**A4**

**PART NO:**

4401-XXSR

**PROJECTION:**

