

1

2




3

4

5

SPECIFICATION:

CURRENT RATE: 1A
 INSULATOR RESISTANCE: 1000M OHM MIN OF 500V DC
 CONTACT RESISTANCE: 20mOHM MAX OF 6V DC 0.3A
 VOLTAGE: 500V AC FOR ONE MINUTE.
 OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim 105^{\circ}\text{C}$
 MATERIAL
 INSULATOR: PBT +30% GLASS FIBER (UL94V-0)
 CONTACT: BRASS
 PLATED: Selective gold over nickel

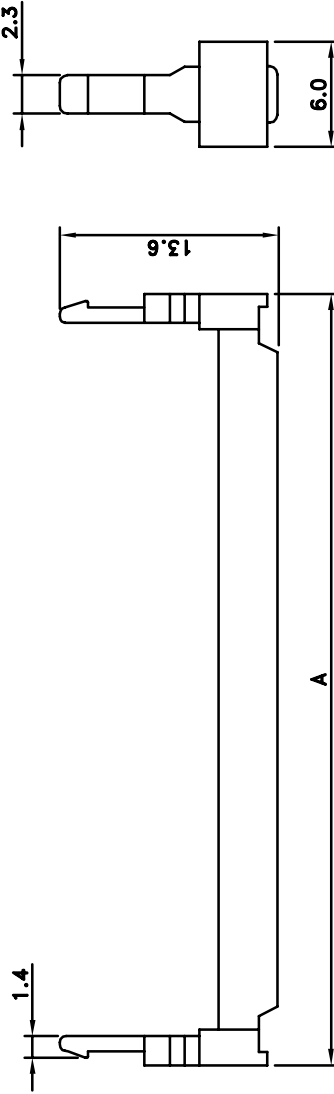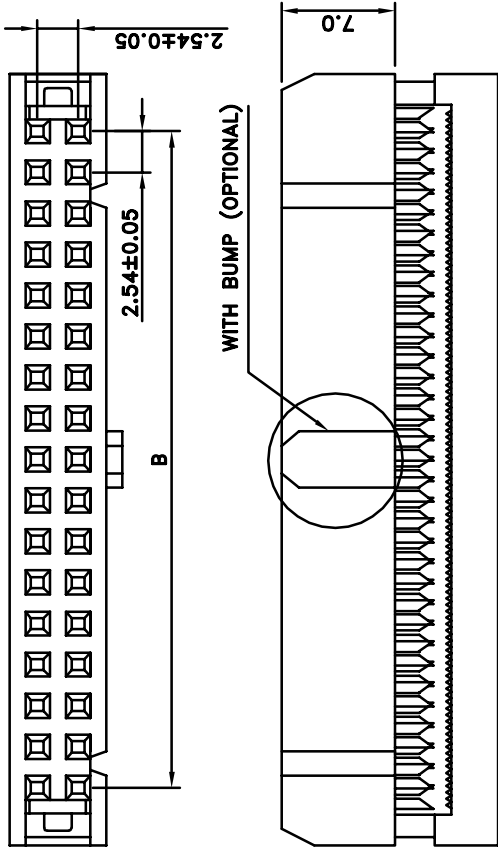

CIRCUITS	DIM. A	DIM. B	CIRCUITS	DIM. A	DIM. B
6	12.18	5.08	26	37.70	30.48
8	14.72	7.62	30	42.70	35.56
10	17.40	10.16	34	47.84	40.64
12	19.80	12.70	40	55.58	48.26
14	22.45	15.24	50	68.14	60.96
16	25.08	17.78	60	81.04	73.66
20	30.20	22.86	64	85.84	78.74
24	35.04	27.94			

GENERAL TOLERANCE:

.X = ± 0.2
 .XX = ± 0.15

DRAWN: Jerry Chen

CHECKED: Jeremy

Jerry Chen

Material

PLAYED

4401-XXSR

APPROVAL: Mike

Jerry Chen

FILE

BY

DATE

REV



繼德工業股份有限公司
 Neltron Industrial Co., Ltd.

DESCRIPTION:

IDC SOCKET

SIZE

PART NO:

4401-XXSR

D

A4