



• 2kW ~ 100kW **with FAN**



• POWER DERATING CURVE

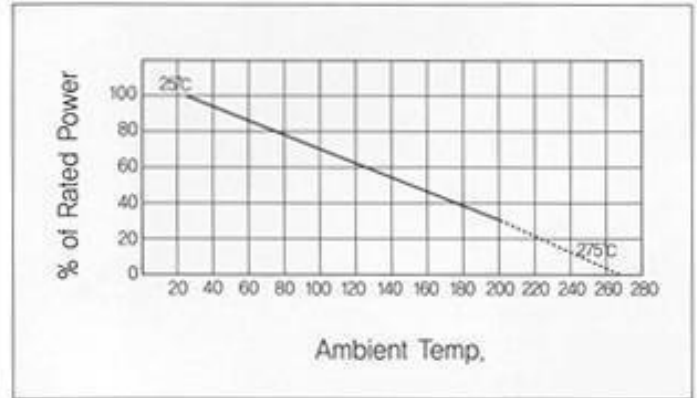

• DIMENSIONS

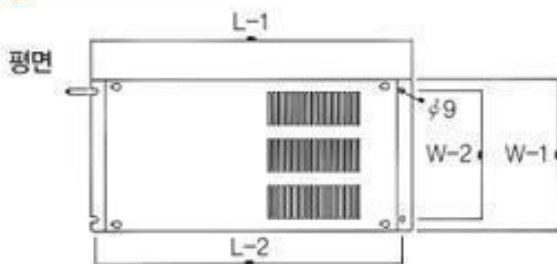

• CHARACTERISTICS

Temperature range	-55°C ~ 200°C
Insulation resistance	Over 20M Ω
Dielectric strength	AC 2,500V/1Min
Temperature coefficient	± 260 ppm/°C max



• SPECIFICATIONS

W: Inductive N: Non-inductive

MODEL	Rated Wattage	R (Ω)		Tolerance	L(m/m) ± 2		W(m/m) ± 2		H ± 2 (m/m)
		W	N		L1	L2	W1	W2	
MCR-FAN-2.0kW	2.0kW	0.1~5.0K	0.1~2.0K	J : $\pm 5\%$	550	525	183	140	125
MCR-FAN-2.4kW	2.4kW	0.1~5.0K	0.1~2.0K		550	525	183	140	125
MCR-FAN-3.0kW	3.0kW	0.1~7.0K	0.1~3.0K		550	525	183	140	182
MCR-FAN-3.6kW	3.6kW	0.1~7.0K	0.1~3.0K		550	525	183	140	182
MCR-FAN-4.0kW	4.0kW	0.1~7.0K	0.1~3.0K		550	525	183	140	182
MCR-FAN-5.0kW	5.0kW	0.1~7.0K	0.1~3.0K		550	525	183	140	182
MCR-FAN-6.0kW	6.0kW	0.1~10K	0.1~5.0K		550	525	263	220	182
MCR-FAN-6.4kW	6.4kW	0.1~10K	0.1~5.0K		550	525	263	220	182
MCR-FAN-7.2kW	7.2kW	0.1~10K	0.1~5.0K		550	525	263	220	182
MCR-FAN-8.0kW	8.0kW	0.1~10K	0.1~5.0K		550	525	263	220	252
MCR-FAN-9.6kW	9.6kW	0.1~10K	0.1~5.0K		550	525	263	220	252
MCR-FAN-10kW	10kW	0.1~13K	0.1~6.0K		550	525	263	220	252
MCR-FAN-12kW	12kW	0.1~13K	0.1~6.0K		550	525	263	220	322
MCR-FAN-15kW	15kW	0.1~13K	0.1~6.0K		550	525	263	220	392
MCR-FAN-18kW	18kW	0.1~20K	0.1~10K		550	525	263	220	392

UNI RESISTOR