



• 2kW ~ 100kW

• POWER DERATING CURVE

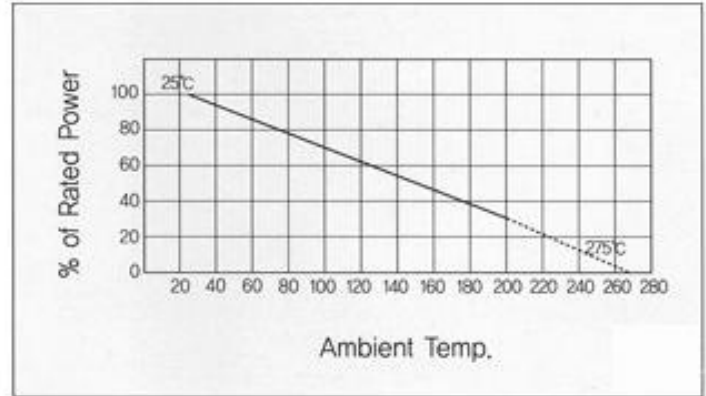

• DIMENSIONS

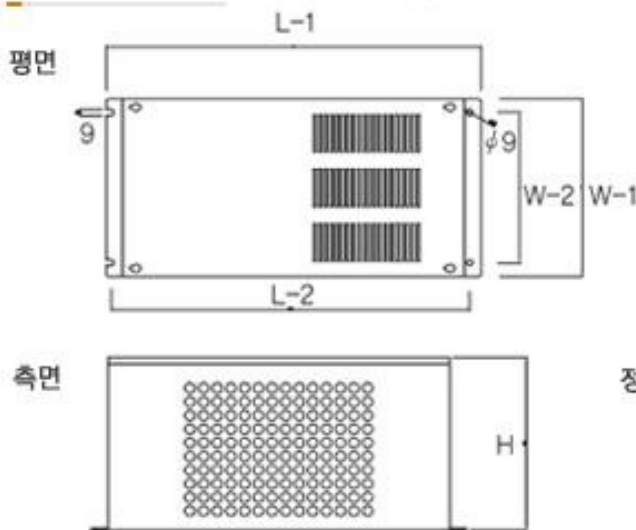

• CHARACTERISTICS

Temperature range	-55°C ~ 200°C
Insulation resistance	Over 200M $\Omega$
Dielectric strength	AC 2,500V/1Min
Temperature coefficient	$\pm 260$ ppm/°C max

• SPECIFICATIONS

W:Inductive N: Non-inductive

MODEL	Rated Wattage	R ( $\Omega$ )		Tolerance	L(m/m) $\pm 2$		W(m/m) $\pm 2$		H $\pm 2$ (m/m)
		W	N		L1	L2	W1	W2	
MCR-SET-2.0kW	2.0kW	0.1~5.0K	0.1~2.0K	J : $\pm 5\%$	550	525	183	140	125
MCR-SET-2.4kW	2.4kW	0.1~5.0K	0.1~2.0K		550	525	183	140	125
MCR-SET-3.0kW	3.0kW	0.1~7.0K	0.1~3.0K		550	525	263	220	125
MCR-SET-3.6kW	3.6kW	0.1~7.0K	0.1~3.0K		550	525	263	220	125
MCR-SET-4.0kW	4.0kW	0.1~7.0K	0.1~3.0K		550	525	183	140	182
MCR-SET-5.0kW	5.0kW	0.1~7.0K	0.1~3.0K		550	525	183	140	182
MCR-SET-6.0kW	6.0kW	0.1~10K	0.1~5.0K		550	525	263	220	182
MCR-SET-6.4kW	6.4kW	0.1~10K	0.1~5.0K		550	525	263	220	182
MCR-SET-7.2kW	7.2kW	0.1~10K	0.1~5.0K		550	525	263	220	182
MCR-SET-8.0kW	8.0kW	0.1~10K	0.1~5.0K		550	525	263	220	252
MCR-SET-9.6kW	9.6kW	0.1~10K	0.1~5.0K		550	525	263	220	252
MCR-SET-10kW	10kW	0.1~13K	0.1~6.0K		550	525	263	220	252
MCR-SET-12kW	12kW	0.1~13K	0.1~6.0K		550	525	263	220	322
MCR-SET-15kW	15kW	0.1~13K	0.1~6.0K		550	525	263	220	392
MCR-SET-18kW	18kW	0.1~20K	0.1~10K		550	525	263	220	392

UNI RESISTOR