

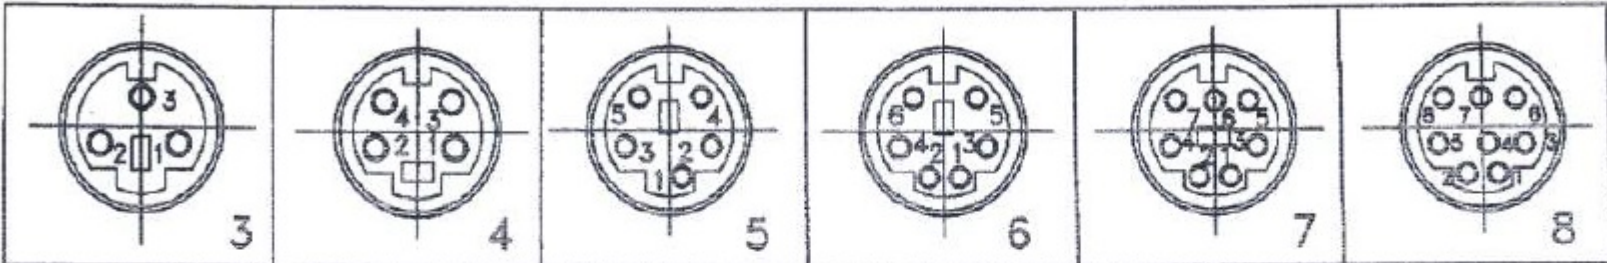


DIMENSIONS ARE IN MILLIMETERS

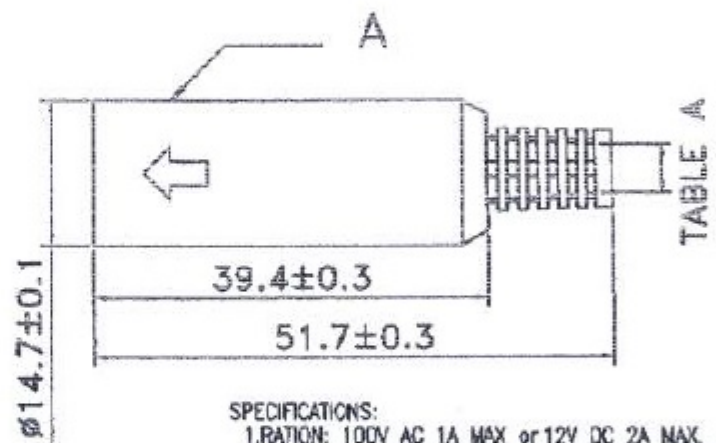

0.5-5 =  $\pm 0.2$   
 5-30 =  $\pm 0.4$   
 30-120 =  $\pm 0.5$   
 120-315 =  $\pm 1$   
 315-1000 =  $\pm 1.5$   
 1000-2000 =  $\pm 2.4$

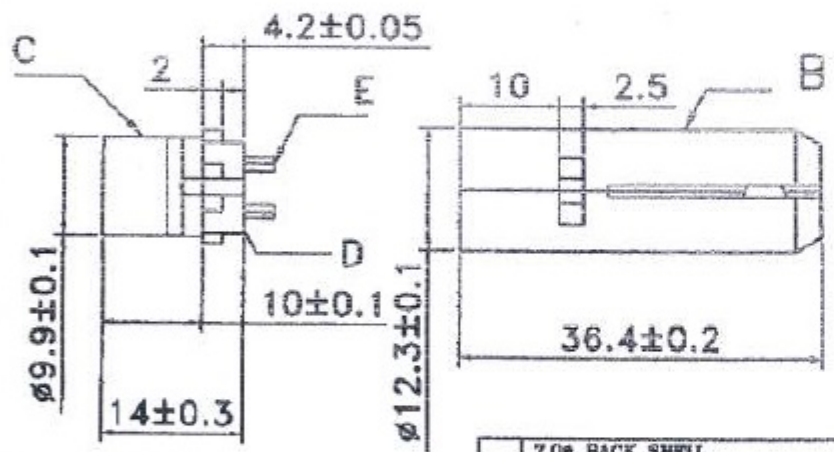

<input type="checkbox"/>	7.0# BACK SHELL
<input type="checkbox"/>	8.0# BACK SHELL
<input checked="" type="checkbox"/>	6.0# BACK SHELL (STANDARD)
<input type="checkbox"/>	COVER DIM.

TABLE A

**SPECIFICATIONS:**  
 1. RATION: 100V AC 1A MAX or 12V DC 2A MAX.  
 2. INSULATION RESISTANCE: 50M OHM MIN at 250V DC.  
 3. DIELECTRIC STRENGTH: 250 V AC / 1 MINUTE.  
 4. CONTACT RESISTANCE: 30M OHM MAX.  
 5. INSERTION FORCE: 4.5KG MAX.  
 6. WITHDRAWAL FORCE: 0.9KG ~ 3KG.  
 7. OPERATING TEMPERATURE: -20°C ~ 105°C

**MATERIALS:**

- A. BOOT: PE + 2L
- B. MIDDLE HOOD: ABS
- C. METAL SHELL:  
COPPER NICKEL PLATED
- D. INSULATOR: NYLON 66 + GLASS
- E. PIN CONTACT:  
BRASS SILVER PLATED

<b>APPROVED BY:</b>	
	<b>Description:</b> MINI DIN JACK FOR CABLE ASSEMBLY
	<b>Part No.:</b> DI-6730
<b>Date:</b> JAN 06 2007	<b>File No.:</b> 63000

