

RoHS

Compliant

Pb

HF

REV

LTR

ECN NO

DESCRIPTION

DATE

APPROVED

NOTES:

1.MECHANICAL:

MATING FORCE: 35N MAX.

UNMATING FORCE: 10N MIN,INITIAL.

8~25N AFTER 10000 CYCLES.

DURABILITY: 10000 CYCLES MIN.

2.ELECTRICAL:

CURRENT: 1.8A

VOLTAGE: 30V MAX

WITHSTANDING VOLTAGE: 100V AC






CONTACT RESISTANCE: 30 mΩ MAX INITIAL;

40 mΩ MAX AFTER 10000

CYCLES

3.ENVIRONMENTAL

OPERATING TEMPERATURE RANGE -25°C ~ +80°C

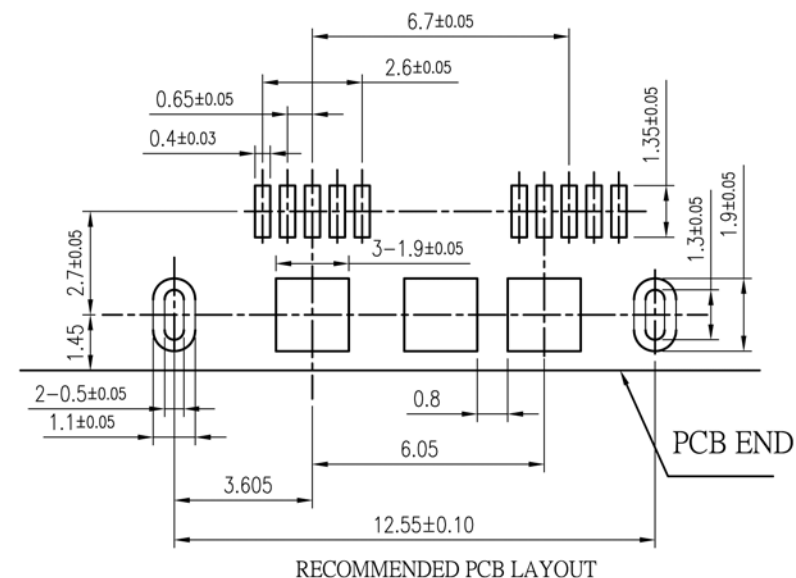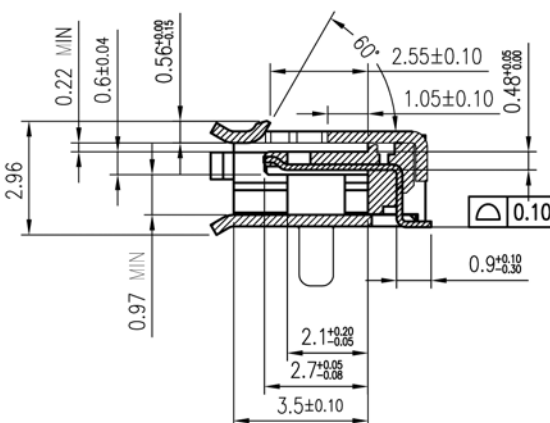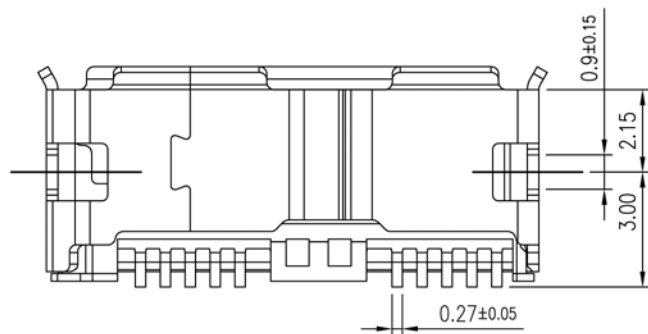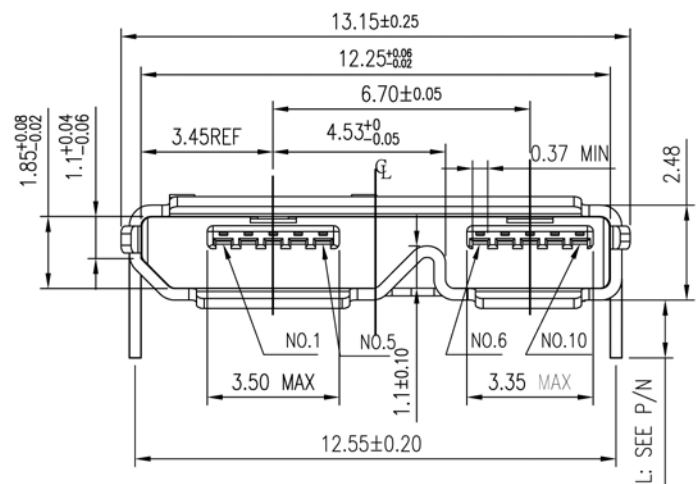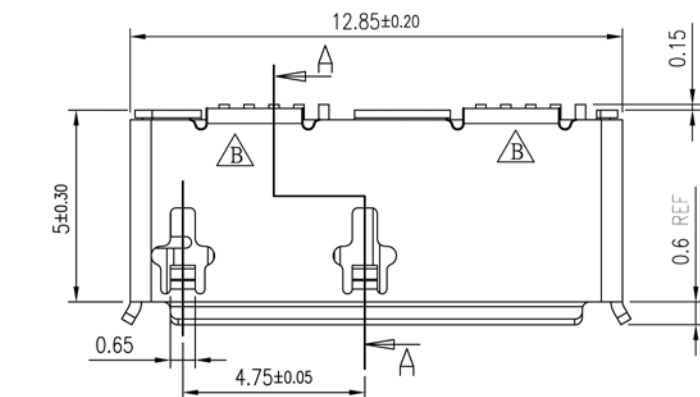

DUWON COMTECH CO., LTD

Draw:
Andrew

Tolerances

Title: Micro USB3.0 B/F SMT
(DIP SHELL) 加宽Check:
Andrew.X ±0.30
.XX ±0.20
.XXX ±0.10
Angles ±1.00°Unit:
mmPart NO:
CMF352-D1113-JRev:
A/0

Approved:

Date:
2014/6/23Scale:
1:1Size:
A4Drawing NO:
CMF-352-CPage:
1/1