

SPECIFICATION OF LCD MODULE

| | |
|---------------------------------------|-----------------------|
| CUSTOMER 客户名称 | |
| PART NO. 产品型号 | OTM162G Y-YG-1 |
| PRODUCTS TYPE 产品内容 | |
| REMARKS 备注 | |
| SIGNATURE BY CUSTOMER 客户签署: | |

| | | |
|---|---|--|
|  |  |  |
|---|---|--|

深圳市晶汉达电子有限公司

09年01月07日

LCM System

1 LCD Type

S - STN F - FSTN D - DFSTN

2 Viewing Angle

D - Lower 6:00 U - Upper 12:00 O - Others

3 Display Mode

Yellow Green positive Blue positive Grey positive
 FSTN positive W - FSTN negative

4 Polarizer Mode

Reflective Transflective Transmissive

5 Connector

Pin Heat sealed Normal

6 Thickness of Glass

1.1mm 0.4mm
 0.55mm 0.7mm

7 Backlight Mode:

LED CCFL

8 Backlight Color

Blue Amber Yellow Green
 Red White Without backlight

9 Temperature Grade

Normal temperature Wide temperature Super wide temperature

10 CG-ROM

01 for English + Japanese language

•REVISION RECORD

| REV. NO. | REV. DATE | DESCRIPTION OF REVISION | PAGE | REMARK |
|----------|-----------|-------------------------|------|--------|
| 1.0 | 07/01/09 | INITIAL RELEASE | ALL | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

CONTENTS

| | | |
|-----|---------------------------------------|----|
| 1. | FEATURES | 5 |
| 2. | MECHANICAL SPEC | 5 |
| 3. | ABSOLUTE MAXIMUM RATING | 6 |
| 4. | ELECTRICAL CHARACTERISTICS | 6 |
| 5. | ELECTRO-OPTICAL CHARACTERISTICS | 8 |
| 6. | BLOCK DIAGRAM | 9 |
| 7. | POWER SUPPLY | 9 |
| 8. | TIMIING DIAGRAM | 10 |
| 9. | AC CHARACTERISTICS..... | 11 |
| 10. | INSTRUCTION SET | 12 |
| 11. | INITIALIZATION SEQUENCE | 13 |
| 12. | FONT TABLE..... | 14 |
| 13. | EXTERNAL DIMENSION | 15 |
| 14. | INTERFACE | 16 |
| 15. | QC/QA PROCEDURE | 17 |
| 16. | RELIABILITY | 18 |
| 17. | HANDING PRECAUTIONS..... | 19 |

1. FEATURES

| | |
|------------------------------|-------------------------|
| •Display construction | 16 Characters * 2 Lines |
| •Display mode | STN(Y/G) |
| •Display type | Positive Transflective |
| •Backlight | LED/5.0V(Y/G) |
| •Viewing direction | 6 o'clock |
| •Operating temperature | -20 to 70 °C |
| •Storage temperature | -30 to 80 °C |
| •Controller | SPLC780D |
| •Driving voltage | Single power |
| •Driving method | 1/16 duty, 1/5 bias |
| •Type | COB (Chip On Board) |
| •Number of data line | 4/8-bit parallel |
| •Connector | PIN |

2. MECHANICAL DATA

| ITEM | | WIDTH | HEIGHT | THICKNESS | UNIT |
|---------------------------|--------------|----------|--------|-----------|------|
| Module size | | 122.0 | 44.0 | 14.0(MAX) | mm |
| Viewing area | | 99.0 | 24.0 | - | mm |
| character | Construction | 5*7 | | | dots |
| | Size | 4.84 | 8.06 | - | mm |
| | Pitch | 6.00 | 10.34 | - | mm |
| Dot | Size | 0.92 | 1.10 | - | mm |
| | Pitch | 0.98 | 1.16 | - | mm |
| Diameter of mounting hole | | Φ3.5 | | | mm |
| Weight | | About 80 | | | g |

3. ABSOLUTE MAXIMUM RATINGS

 (TA = 25 , V_{SS}=0V)

| Item | Symbol | MIN. | Max. | Unit |
|-----------------------------|----------------------------------|----------------------|----------------------|------|
| Supply Voltage (Logic) | V _{DD} -V _{SS} | 0 | 7.0 | V |
| Supply Voltage (LCD Driver) | V _{LCD} | V _{DD} -1.2 | V _{DD} +0.3 | V |
| Input Voltage | V _{IN} | -0.3 | V _{DD} +0.3 | V |
| Operating temperature | T _{op} | 0 | 50 | °C |
| Storage temperature | T _{sto} | -10 | 60 | °C |

4. ELECTRICAL CHARACTERISTICS

 (V_{DD} = 4.5 to 5.5V , TA = 25)

| Characteristic | Symbol | Condition | Min | Typ | Max | Unit |
|---|---------------------------------|--|----------------------|------|--------------------|------|
| Operating Voltage | V _{DD} | - | 4.5 | - | 5.5 | V |
| Operating Current | I _{DD} | Internal oscillation or external clock (V _{DD} = 5.0V, f _{osc} = 270kHz) | - | 0.35 | 0.6 | mA |
| Input Voltage (1) (except OSC1) | V _{IH1} | - | 2.2 | - | V _{DD} | V |
| | V _{IL1} | - | -0.3 | - | 0.6 | |
| Input Voltage (2) (OSC1) | V _{IH2} | - | V _{DD} -1.0 | - | V _{DD} | V |
| | V _{IL2} | - | -0.2 | - | 1.0 | |
| Output Voltage (1) (DB0 to DB7) | V _{OH1} | I _{OH} = -0.205mA | 2.4 | - | - | V |
| | V _{OL1} | I _{OL} = 1.2mA | - | - | 0.4 | |
| Output Voltage (2) (except DB0 to DB7) | V _{OH2} | I _O = -40μA | 0.9V _{DD} | - | - | V |
| | V _{OL2} | I _O = 40μA | - | - | 0.1V _{DD} | |
| Voltage Drop | V _{dCOM} | I _O = ±0.1mA | - | - | 1 | V |
| | V _{dSEG} | | - | - | 1 | |
| Input Leakage Current | I _{LKG} | V _{IN} = 0V to V _{DD} | -1 | - | 1 | μA |
| Input Low Current | I _{IL} | V _{IN} = 0V, V _{DD} = 5V (pull up) | -50 | -125 | -250 | |
| Internal Clock (external Rf) | f _{OSC1} | Rf = 91kΩ ±2% (V _{DD} = 5V) | 190 | 270 | 350 | kHz |
| External Clock | f _{OSC} | - | 125 | 270 | 350 | kHz |
| | duty | | 45 | 50 | 55 | % |
| | t _R , t _F | | - | - | 0.2 | μA |
| LCD Driving Voltage | V _{LCD} | V _{DD} -V ₅ (1/5, 1/4 bias) | 3.0 | - | 13.0 | V |

4.1 LED ELECTRICAL/OPTICAL CHARACTERISTICS


| Item | Symbol | min | typ | max | Unit | Condition |
|--------------------------|----------------|-----|-----|-----|-------------------|-------------------------|
| Forward Voltage | V _f | 4.8 | 5.0 | 5.2 | V | I _f = 240 mA |
| Reverse Current | I _r | - | 240 | - | μA | V _r =10V |
| Dominant wave length | λ _d | 565 | 570 | 575 | nm | I _f = 240 mA |
| Spectral Line Half width | Δ λ | - | 30 | - | nm | I _f = 240 mA |
| Luminance | L _v | 120 | 150 | - | cd/m ² | I _f = 240 mA |

4.2 LED ABSOLUTE MAXIMUM RATINGS

| Item | Symbol | Condition | Rating | Unit |
|----------------------------------|-----------------|----------------------|--------|------|
| Reverse Voltage | V _r | T _a =25°C | 10 | V |
| Absolute maximum forward current | I _{fm} | T _a =25°C | 480 | mA |
| Power description | pd | T _a =25°C | 2400 | mW |

4.2.1 LED ARRAY BLOCK DIAGRAM

(LED DICE 2×24= 48 dices)

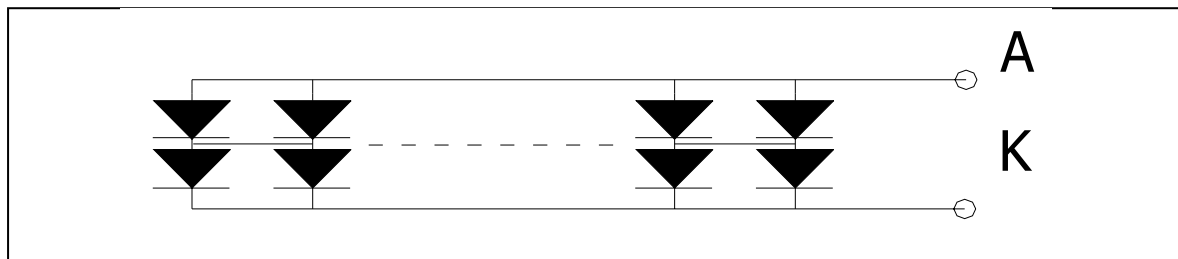


4.2.2 LED POWER SOURCE

| LED | Option | Power source | Jumper setting |
|-----|---------|--------------|----------------|
| | A | 15K/16A | J4 J5 R8 |
| B | 15A/16K | J3 J6 R7 | |
| | | | |


5. ELECTRO-OPTICAL CHARACTERISTICS

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT | NOTE |
|----------------------|----------|--------------|------------|------|------|------|------|
| Contrast ratio | K | $\phi=0$ | 1.4 | 4 | - | - | 1 |
| Response time (rise) | Tr | $\phi=1$ | - | 130 | - | ms | 2 |
| Response time (fall) | Tf | $\phi=2$ | | 130 | - | ms | 2 |
| Viewing angle | ϕ | K ≥ 1.4 | 10 -- +30 | | | deg. | 3 |
| | θ | | -30 -- +30 | | | | |


Note 1: Definition of Contrast Ratio "K"

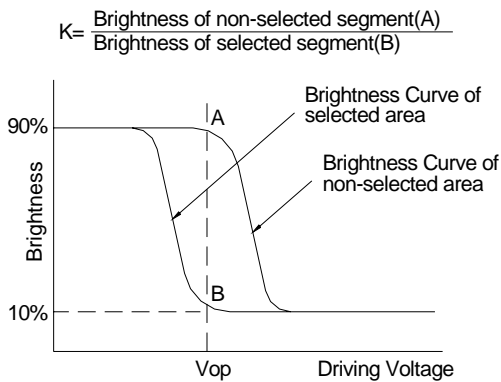

Note 2: Definition of Optical Response Time

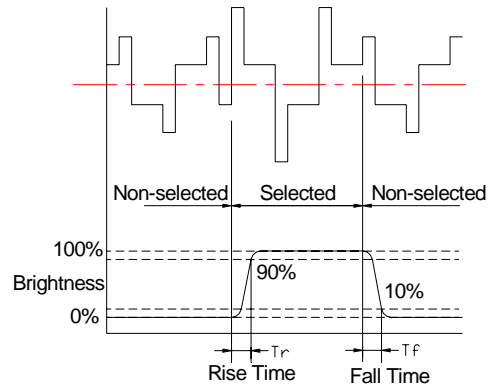


Note 3: Definition of Viewing Angle

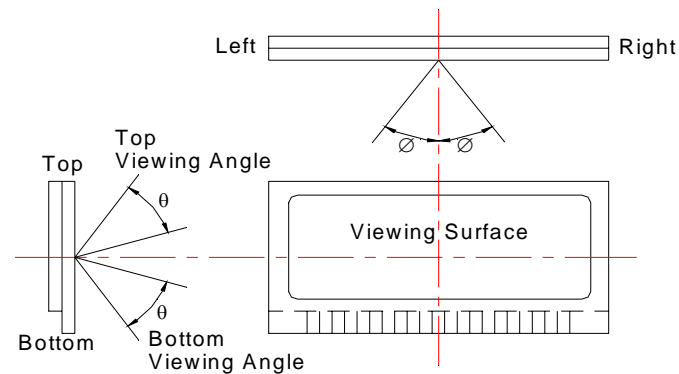


Please select either top or bottom viewing angle

6. BLOCK DIAGRAM

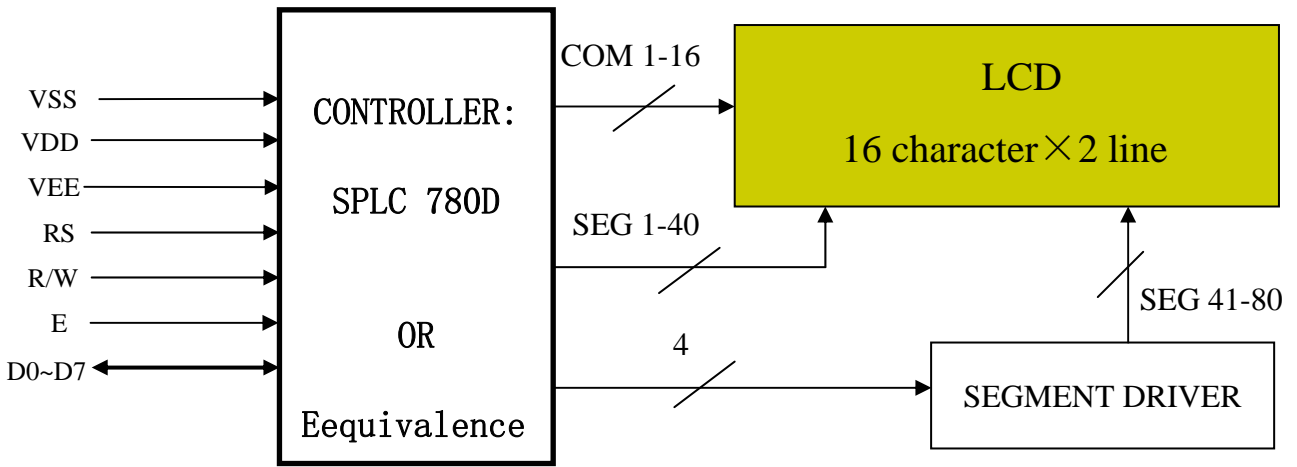


7. POWER SUPPLY

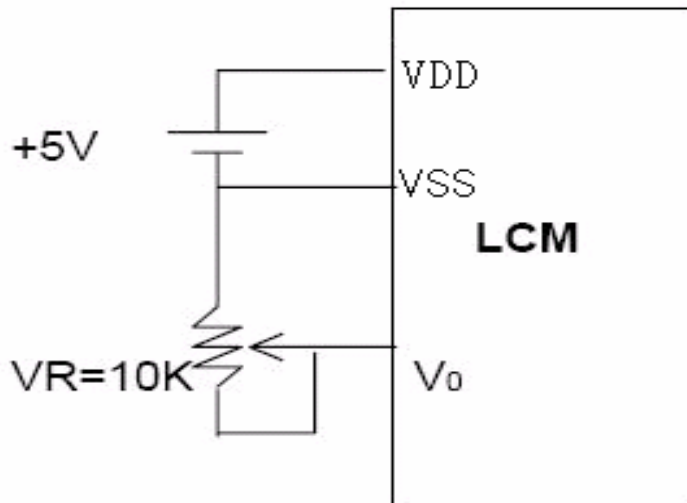


8. TIMING DIAGRAM

• WRITE OPERATION

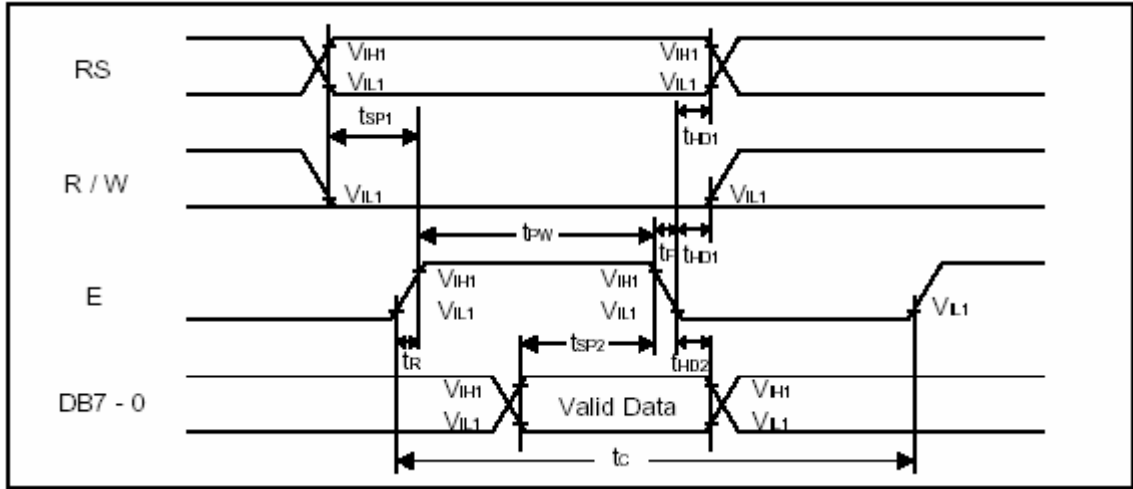

• READ OPERATION

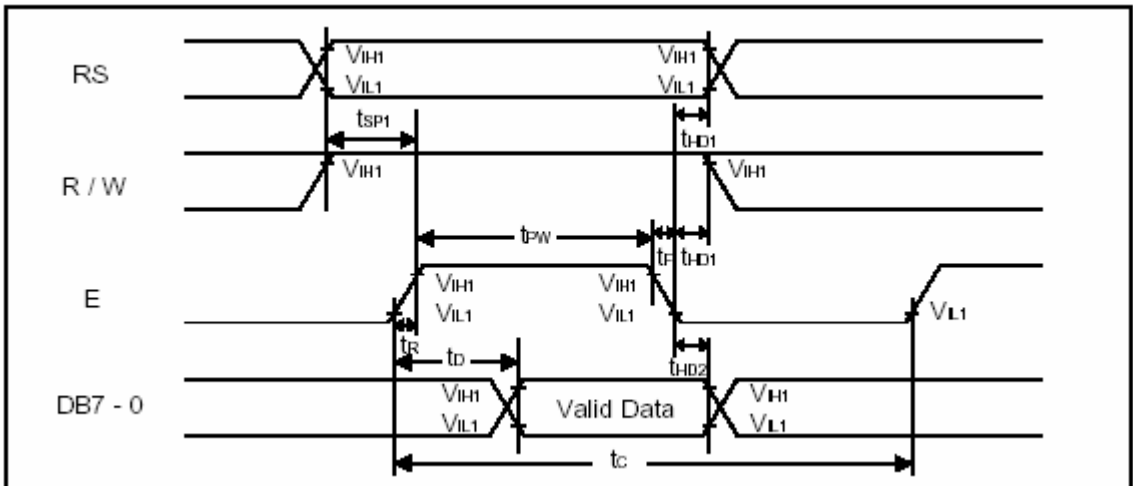

9. AC CHARACTERISTICS


• WRITE MODE

| Characteristics | Symbol | Limit | | | Unit | Test Condition |
|--------------------|------------|-------|------|------|------|------------------|
| | | Min. | Typ. | Max. | | |
| E Cycle Time | t_c | 1000 | - | - | ns | Pin E |
| E Pulse Width | t_{pw} | 450 | - | - | ns | Pin E |
| E Rise/Fall Time | t_r, t_f | - | - | 25 | ns | Pin E |
| Address Setup Time | t_{sp1} | 60 | - | - | ns | Pins: RS, R/W, E |
| Address Hold Time | t_{hd1} | 20 | - | - | ns | Pins: RS, R/W, E |
| Data Setup Time | t_{sp2} | 195 | - | - | ns | Pins: DB7 - 0 |
| Data Hold Time | t_{hd2} | 10 | - | - | ns | Pins: DB7 - 0 |

• READ MODE

| Characteristics | Symbol | Limit | | | Unit | Test Condition |
|------------------------|------------|-------|------|------|------|------------------|
| | | Min. | Typ. | Max. | | |
| E Cycle Time | t_c | 1000 | - | - | ns | Pin E |
| E Pulse Width | t_w | 450 | - | - | ns | Pin E |
| E Rise/Fall Time | t_r, t_f | - | - | 25 | ns | Pin E |
| Address Setup Time | t_{sp1} | 60 | - | - | ns | Pins: RS, R/W, E |
| Address Hold Time | t_{hd1} | 20 | - | - | ns | Pins: RS, R/W, E |
| Data Output Delay Time | t_o | - | - | 360 | ns | Pins: DB7 - 0 |
| Data hold time | t_{hd2} | 5.0 | - | - | ns | Pin DB7 - 0 |

10. INITIALIZATION SEQUENCE

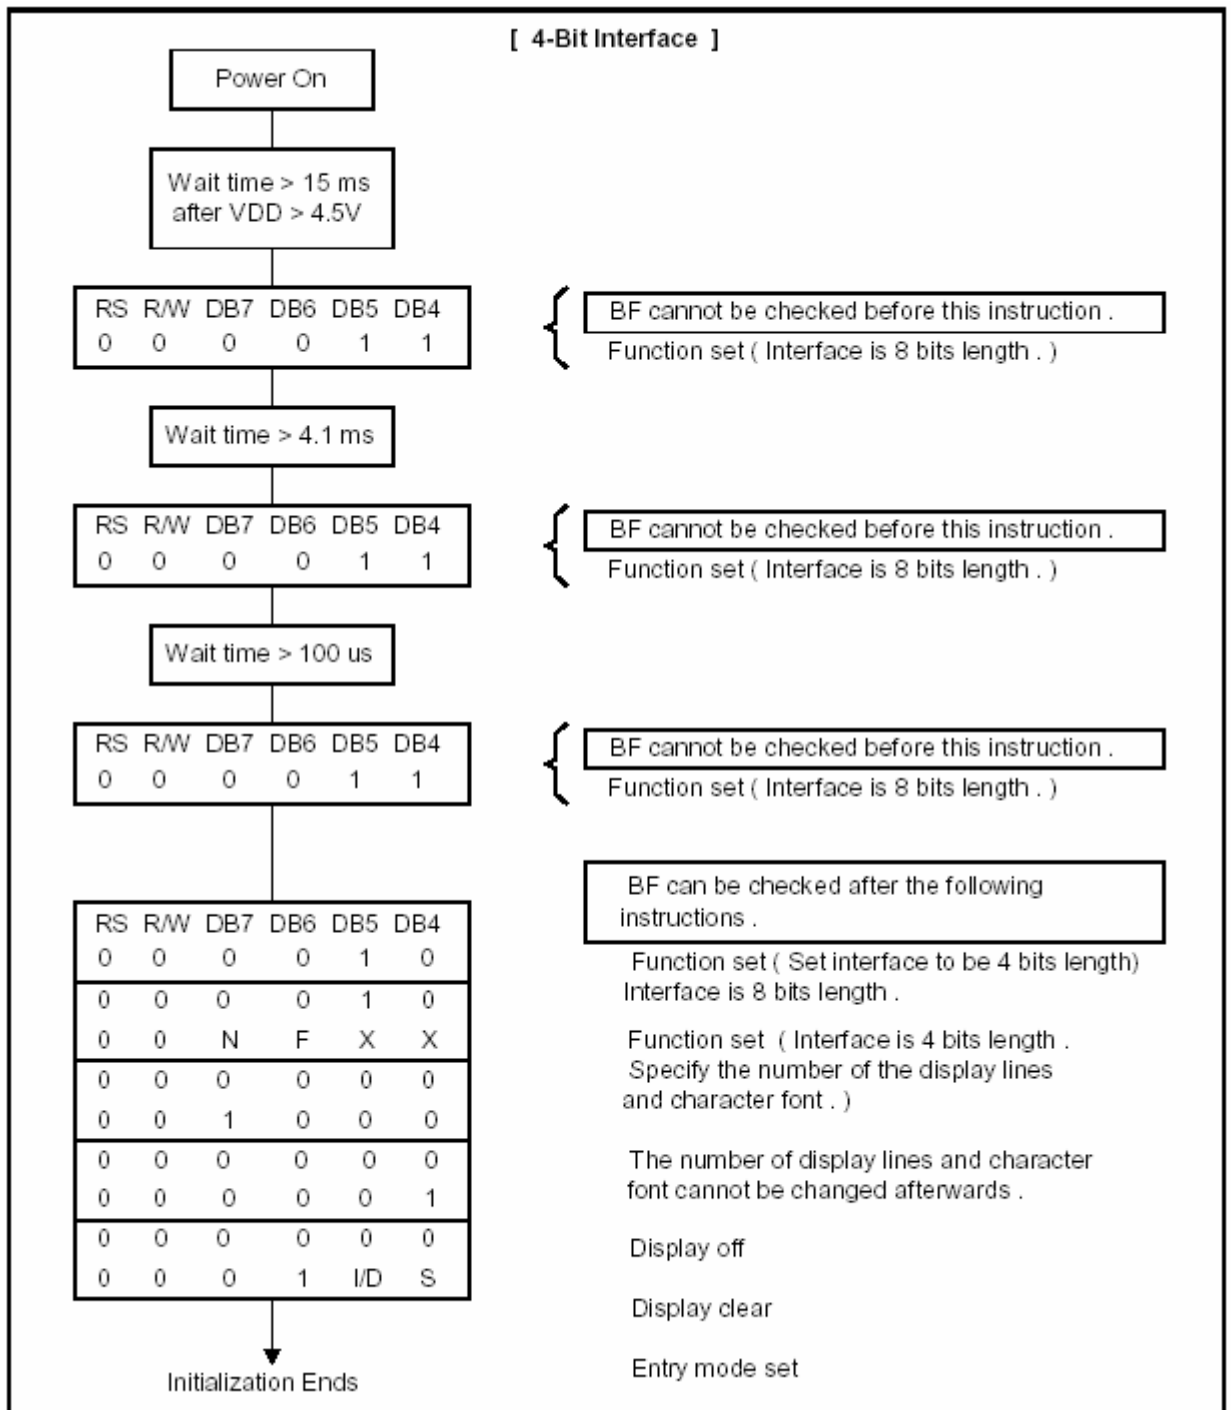


11. INSTRUCTION SET

| COMMAND | COMMAND CODE | | | | | | | | | | COMMAND CODE | E-CYCLE $f_{osc}=250\text{KHz}$ | |
|-------------------------------|---|-----|------------|-----|-----|-----|-----|-----|-----------------------------------|--|---|--|--------|
| | RS | R/W | DB7 | DB6 | DB5 | DB4 | DB3 | DB2 | DB1 | DB0 | | | |
| SCREEN CLEAR | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | Screen Clear, Set AC to 0 Cursor Reposition | 1.64ms | |
| CURSOR RETURN | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | * | DDRAM AD=0, Return, Content Changeless | 1.64ms |
| INPUT SET | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | I/D | S | Set moving direction of cursor, Appoint if move | 40us |
| DISPLAY SWITCH | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | D | C | B | Set display on/off,cursor on/off, blink on/off | 40us |
| SHIFT | 0 | 0 | 0 | 0 | 0 | 0 | 1 | S/C | R/L | * | * | Remove cursor and whole display,DDRAM changeless | 40us |
| FUNCTION SET | 0 | 0 | 0 | 0 | 0 | 1 | DL | N | F | * | * | Set DL,display line,font | 40us |
| CGRAM AD SET | 0 | 0 | 0 | 1 | ACG | | | | | | Set CGRAM AD, send receive data | 40us | |
| DDRAM AD SET | 0 | 0 | 1 | ADD | | | | | | Set DDRAM AD, send receive data | 40us | | |
| BUSY/AD READ CT | 0 | 1 | BF | AC | | | | | | Executing internal function, reading AD of CT | 40us | | |
| CGRAM/ DDRAM DATA WRITE | 1 | 0 | DATA WRITE | | | | | | Write data from CGRAM or DDRAM | 40us | | | |
| CGRAM/ DDRAM DATA READ | 1 | 1 | DATA READ | | | | | | Read data from CGRAM or DDRAM | 40us | | | |
| | I/D=1: Increment Mode; I/D=0: Decrement Mode S=1: Shift S/C=1: Display Shift; S/C=0: Cursor Shift R/L=1: Right Shift; R/L=0: Left Shift DL=1: 8D DL=0: 4D N=1: 2R N=0: 1R F=1: 5x10 Style; F=0: 5x7 Style BF=1: Execute Internal Function; BF=0: Command Received | | | | | | | | | | DDRAM: Display data RAM CGRAM: Character Generator RAM ACG: CGRAM AD ADD: DDRAM AD & Cursor AD AC: Address counter for DDRAM & CGRAM | E-cycle changing with main frequency. Example: If fcp or $f_{osc}=270\text{KHz}$ 40us x 250/270 =37us | |

12. FONT TABLE

| b7- b3 b4 -b0 | | 0000 | 0010 | 0011 | 0100 | 0101 | 0110 | 0111 | 1010 | 1011 | 1100 | 1101 | 1110 | 1111 |
|------------------------|------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 0000 | CG RAM (1) | | 0 | a | P | ` | P | - | 9 | 3 | | | o | p |
| 0001 | (2) | ! | 1 | A | Q | a | 9 | u | 7 | 7 | 4 | | ä | q |
| 0010 | (3) | " | 2 | B | R | b | r | r | ı | ı | ı | | ß | ö |
| 0011 | (4) | # | 3 | C | S | c | s | ı | ı | ı | ı | | è | ø |
| 0100 | (5) | \$ | 4 | D | T | d | t | ı | ı | ı | ı | | ı | ı |
| 0101 | (6) | % | 5 | E | U | e | u | . | o | o | ı | | ı | ı |
| 0110 | (7) | & | 6 | F | V | f | v | ı | ı | ı | ı | | ı | ı |
| 0111 | CG RAM (8) | ' | 7 | G | W | g | w | ı | ı | ı | ı | | ı | ı |
| 1000 | CG RAM (1) | (| 8 | H | X | h | x | ı | ı | ı | ı | | ı | ı |
| 1001 | (2) |) | 9 | I | Y | i | y | ı | ı | ı | ı | | ı | ı |
| 1010 | (3) | * | : | J | Z | j | z | ı | ı | ı | ı | | ı | ı |
| 1011 | (4) | + | ; | K | [| k | [| ı | ı | ı | ı | | ı | ı |
| 1100 | (5) | , | < | L | ı | ı | ı | ı | ı | ı | ı | | ı | ı |
| 1101 | (6) | - | = | M |] | m | ı | ı | ı | ı | ı | | ı | ı |
| 1110 | (7) | . | > | N | ^ | n | ı | ı | ı | ı | ı | | ı | ı |
| 1111 | CG RAM (8) | / | ? | O | _ | o | ı | ı | ı | ı | ı | | ı | ı |

13. EXTERNAL DIMENSION

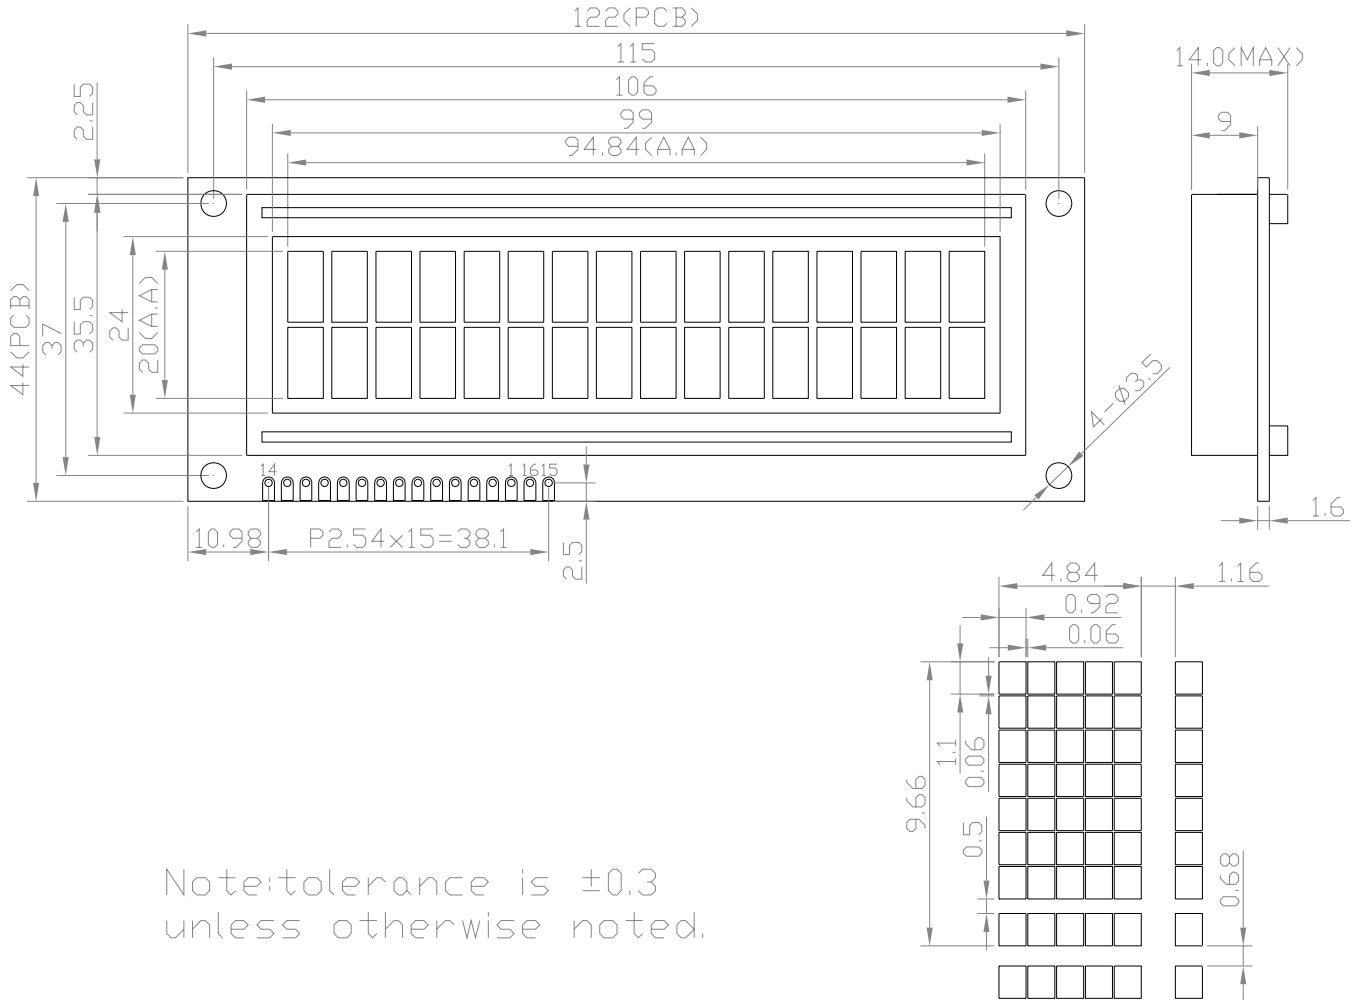


| | | | | | | | |
|-----|-----|-----|-----|-----|-----|------|------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| VSS | VDD | V0 | RS | R/W | E | DB0 | DB1 |
| 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | LEDK | LEDA |

14. INTERFACE

| PIN NO. | SYMBOL | DESCRIPTION | FUNCTION |
|---------|--------|-------------------------------------|---|
| 1 | VSS | GROUND | 0V (GND) |
| 2 | VDD | POWER SUPPLY FOR LOGIC CIRCUIT | +5V |
| 3 | V0 | LCD CONTRAST ADJUSTMENT | |
| 4 | RS | INSTRUCTION/DATA REGISTER SELECTION | RS = 0 : INSTRUCTION REGISTER RS = 1 : DATA REGISTER |
| 5 | R/W | READ/WRITE SELECTION | R/W = 0 : REGISTER WRITE R/W = 1 : REGISTER READ |
| 6 | E | ENABLE SIGNAL | |
| 7 | DB0 | DATA INPUT/OUTPUT LINES | 8 BIT: DB0-DB7 |
| 8 | DB1 | | |
| 9 | DB2 | | |
| 10 | DB3 | | |
| 11 | DB4 | | |
| 12 | DB5 | | |
| 13 | DB6 | | |
| 14 | DB7 | | |
| 15 | LEDK | SUPPLY VOLTAGE FOR LED+ | 0V |
| 16 | LEDA | SUPPLY VOLTAGE FOR LED- | +5V |

15. QC/QA PROCEDURE

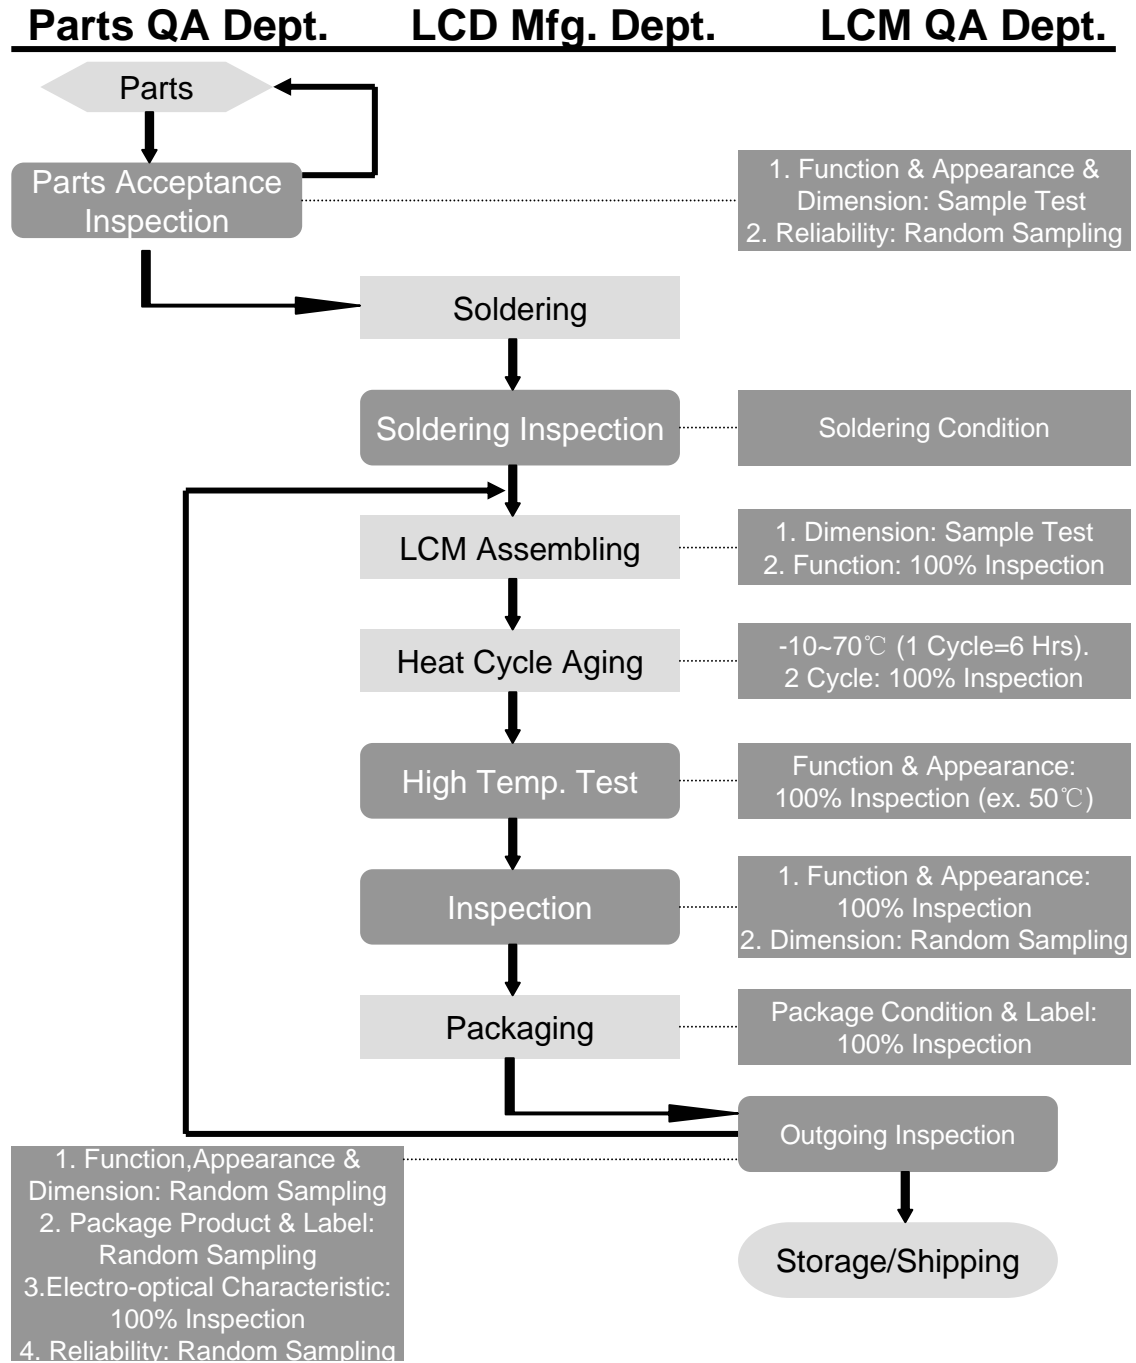

13. QUALITY ASSURANCE

13.1.1 Temperature and Humidity(Ambient Temperature)

Temperature : $20 \pm 5^{\circ} \text{C}$

Humidity : $65 \pm 5\%$

13.1.2 Operation

Unless specified otherwise, test will be conducted under function state.

13.1.3 Container

Unless specified otherwise, vibration test will be conducted to the product itself without putting it in a container.

13.1.4 Test Frequency

In case of related to deterioration such as shock test.It will be conducted only once.

13.1.5 Test Method

| No. | Parameter | Conditions | Regulations |
|-----|--|---|-------------|
| 1 | High Temperature Operating | $70 \pm 2^{\circ}\text{C}$ | Note 3 |
| 2 | Low Temperature Operating | $-20 \pm 2^{\circ}\text{C}$ | Note 3 |
| 3 | High Temperature Storage | $80 \pm 2^{\circ}\text{C}$ | Note 3 |
| 4 | Low Temperature Storage | $-30 \pm 2^{\circ}\text{C}$ | Note 3 |
| 5 | Vibration Test (Non-operation state) | Total fixed amplitude : 1.5mm Vibration Frequency : 10 ~ 55Hz One cycle 60 seconds to 3 directions of X.Y.Z. for each 15 minutes | Note 3 |
| 6 | Damp Proof Test (Non-operation state) | $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$, 90~95%RH, 96h | Note 1,2 |
| 7 | Shock Test (Non-operation state) | To be measured after dropping from 60cm high once concrete surface in packing state | Note 3 |

Note 1: Returned under normal temperature and humidity for 4 hrs.

Note 2: No dew condensation to be observed.

Note 3: No change on display and in operation under the test condition

17. Handling Precautions

1. Limitation of Application:

Optrex products are designed for use in ordinary electronic devices such as business machines, telecommunications equipment, measurement devices and etc. Please handle the products with care. (see below)


Optrex products are not designed, intended, or authorized for use in any application which the failure of the product could result in a situation where personal injury or death may occur. these applications include, but are not limited to, life-sustaining equipment, nuclear control devices, aerospace equipment, devices related to hazardous or flammable materials, etc. [If Buyer intends to purchase or use the Optrex Products for such unintended or unauthorized applications, Buyer must secure prior written consent to such use by a responsible officer of Optrex Corporation.] Should Buyer purchase or use Optrex Products for any such unintended or unauthorized application [without such consent]. Buyer shall indemnify and hold Optrex and its officers, employees, subsidiaries, affiliates and distributors harmless against all claims, costs, damages and expenses, and reasonable attorney's fees, arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Optrex was negligent regarding the design or manufacture of the part.

2. Industrial Rights and Patents

Optrex shall not be responsible for any infringement of industrial property rights of third parties in any country arising out of the application or use of Optrex products, except which directly concern the structure or production of such products.


No Press and Shock!

If pressure to LCD, orientation may be disturbed.
LCD will broken by shock!

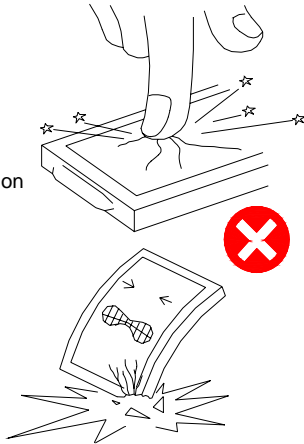


Don't Swallow or Touch Liquid Crystal!

Liquid Crystal may be leaked when display is broked.
If it accidentally gets your hands, wash then with water!

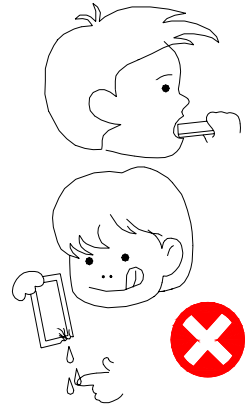


Don't not Scratch!

Polarizer is a soft material and can easily be scratched.




No DC Voltage to LCD!

DC vorage or driving higher than the specified voltage will reduce the lifetime of the LCD.




Don't Press the Metallic Frame and Disassemble the LCM

Pressure on the metallic frame and PCB may deform the conductive rubber or break the liquid crystal cell and back light, which will cause defects.




LCD may be shifted or conductive rubber may be reshaped, which will cause defects.




Slowly Peel Off Protective Film!

Avoid static electricity.



Avoid Static Electricity!


Please be sure to ground human body and electric appliances during work. It is preferable to use conductive mat on table and wear cotton clothes or conduction processed fiber. Synthetic fiber is not recommended.



Wear Gloves While Handling!


It is preferable to wear gloves to avoid damaging the LCD.

Please do not touch electrodes with bare hands or make them dirty.




Keep Away From Extreme Heat and Humidity!

LCD deteriorates.

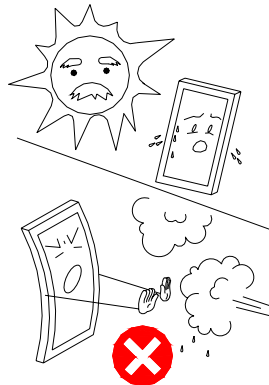


Use Alcohol to Clean Terminals!

When attaching with the heat seal or anisotropically conductive film, wipe off with alcohol before use.

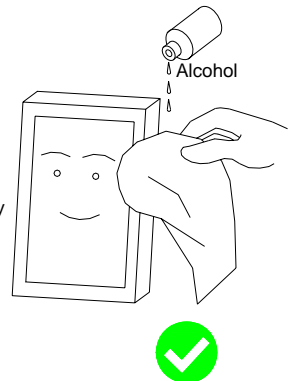

Don't Drop Water on LCD!

Note that the presence of waterdrops or dew in the LCD panel may deteriorate the polarizer or corrode electrode.

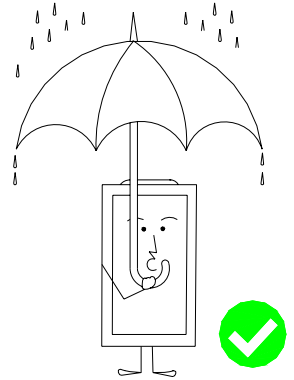**Precaution in Soldering LCD Module**

Basic instructions: Solder I/O terminals only.
Use soldering iron without leakage.

(1) Soldering condition to I/O terminals

Temperature at tip of the iron: $280 \pm 10^{\circ}\text{C}$

Soldering time: 3~4 sec.

Type of solder: Eutectic solder (containing colophony-flux)

*Please do not use flux because it may soak into LCD Module or contaminate it.

*It is preferable to peel off protective film on display surface after soldering I/O terminals is finished.

(2) Remove connector or cable

*When you remove connector or cable soldered to I/O terminals, please confirm that solder is fully melted. If you remove by force, electrodes at I/O terminals may be damaged (or stripped off).

*It is recommended to use solder suction machine.

Long-term Storage

If it is necessary to store LCD modules for a long time, please comply with the following procedures.

If storage condition is not satisfactory, display (especially polarizer) may be deteriorated or soldering I/O terminals may become difficult (some oxide is generated at I/O terminals plating).

1. Store as delivered by Optrex

2. If you store as unpacked, put in anti-static bag, seal its opening and store where it is not subjected to direct sunshine nor fluorescent lamp.

3. Store at temperature 0 to $+35^{\circ}\text{C}$ and at low humidity. Please refer to our specification sheets for storage temperature range and humidity condition.

Long-term Storage

Please use power supply with built-in surge protection circuit.