

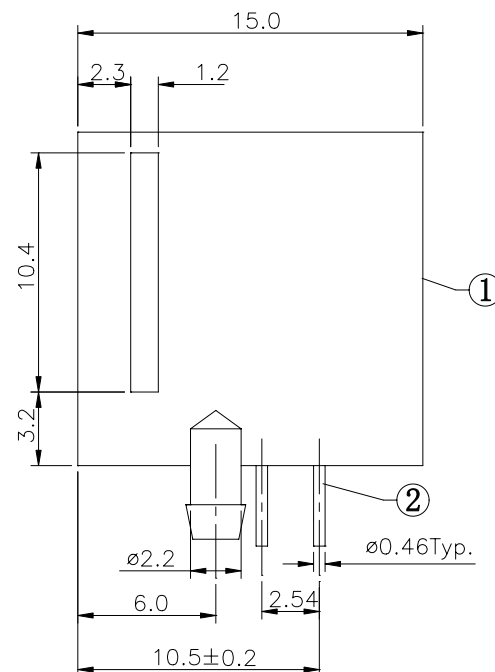


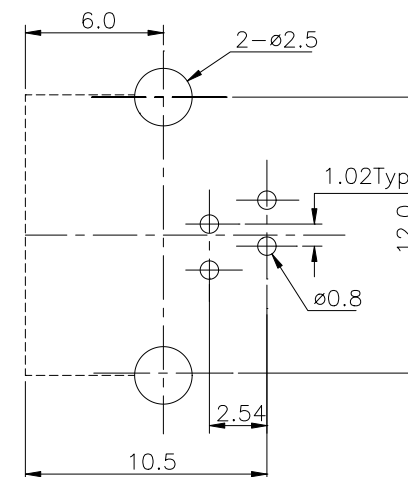

TOP
VIEW



1. Rating : AC 125V 1.5A;
2. Contact resistance: $\leq 30\text{m}\Omega$;
3. Insulation resistance: $\geq 1000\text{M}\Omega$ (DC500V);
4. Withstand voltage: 1000VAC ;
5. Insertion force: 15N;
Extraction force: 15N;
Locking force: 75N;
6. life test: 750 Mating cycles Min.

2	CONTACT FOOT	4	BRONZE	Au-Plating					
1	HOUSING	1	PBT/ABS						
NO.	DESCRIPTION	QTY	MATERIAL	PLATING					
UNIT: MM		TYPE:		MODEL NO:		PAPER NO: A4		PAGE 1 OF 1	
		PCB JACK		PCB-402 (4P4C2C)		TOLERANCE	ANGLES	SCALE	VER
						0.15	1:1	3:1	1
DESIGNER BY:				 旭日佳电子有限公司 □ BEST SUN ELECTRONIC CO., LTD					
CHECK BY:									
APPROVED BY:									

