



B/SUN

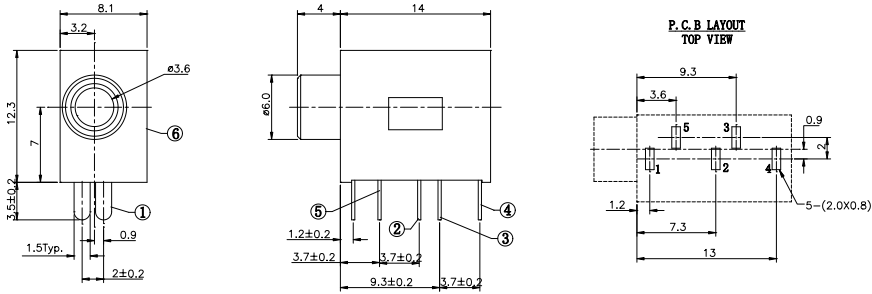

SCHEMATIC




SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: 40.03Ω;
3. Insulation resistance: ≥100MΩ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

7	COVER	1	PBT				
6	HOUSING	1	PBT/PC				
5	SPRING PIECE	1	PHOSPHOR BRONZE			Sn-Plating	
4	CURVE PIECE	1	H62 BRASS			Sn-Plating	
3	SPRING PIECE	1	PHOSPHOR BRONZE			Sn-Plating	
2	CURVE PIECE	1	H62 BRASS			Sn-Plating	
1	FLAT PIECE	1	H62 BRASS			Sn-Plating	
	NO. DESCRIPTION	QTY	MATERIAL			PLATING	
	UNIT/MM	TYPE:	MODEL NO.	PAPER NO. A4	PAGE 1 OF 1		
		PHONE JACK	PJ-325D	TOLERANCE	ANGLES	SCALE	VER
				0.15	REL.6	3:1	1
DESIGNER				旭日佳电子有限公司 BEST SUN ELECTRONIC CO., LTD			
CHECK BY:							
APPROVED BY:							

B/SUN

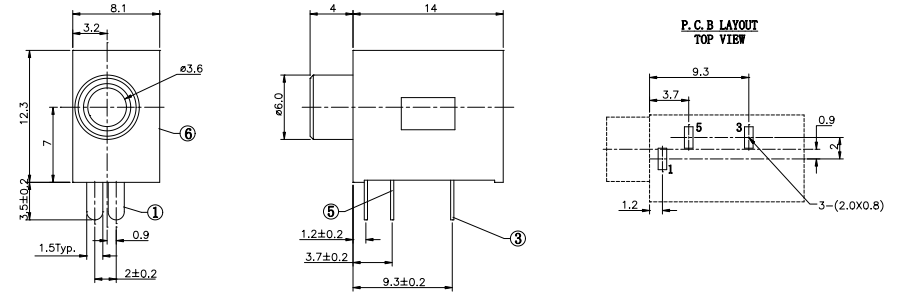

SCHEMATIC



SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: 40.03Ω;
3. Insulation resistance: ≥100MΩ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

7	COVER	1	PBT				
6	HOUSING	1	PBT/PC				
5	SPRING PIECE	1	PHOSPHOR BRONZE			Sn-Plating	
4	CURVE PIECE	1	H62 BRASS			Sn-Plating	
3	SPRING PIECE	1	PHOSPHOR BRONZE			Sn-Plating	
2	CURVE PIECE	1	H62 BRASS			Sn-Plating	
1	FLAT PIECE	1	H62 BRASS			Sn-Plating	
	NO. DESCRIPTION	QTY	MATERIAL			PLATING	
	UNIT/MM	TYPE:	MODEL NO.	PAPER NO. A4	PAGE 1 OF 1		
		PHONE JACK	PJ-325D-2	TOLERANCE	ANGLES	SCALE	VER
				0.15	REL.6	3:1	1
DESIGNER				旭日佳电子有限公司 BEST SUN ELECTRONIC CO., LTD			
CHECK BY:							
APPROVED BY:							