


SCHEMATIC

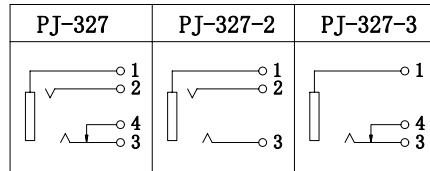

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

5	HOUSING	1	PBT			
4	CURVE PIECE	1	BRASS			
3	3#CONTACT FOOT	1	PHOSPHOR BRONZE			
2	2#CONTACT FOOT	1	PHOSPHOR BRONZE			
1	1#CONTACT FOOT	1	PHOSPHOR BRONZE			
NO.	DESCRIPTION	QTY	MATERIAL			
			PLATING			
UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4			
	PHONE JACK	PJ-327	PAGE 1 OF 1			
			TOLERANCE	ANGLES	SCALE	VER
			0.15	1.5	4:1	1
DESIGNER BY:						
CHECK BY:						
APPROVED BY:						



旭日佳电子有限公司
 BEST SUN ELECTRONIC CO., LTD