



SENSING AND CONTROL

## Product Range Guide

# For innovation that's well apart, there's only Honeywell Sensing and Control.

With more than 50,000 products ranging from snap-action, limit, toggle, and pressure switches to position, speed, pressure, and airflow sensors, Honeywell Sensing and Control (S&C) has one of the broadest sensing and switching portfolios available.

Honeywell sensor, switch, and control components are tailored to exact specifications for stronger performance, longer productivity, and increased safety. Enhanced accuracy and durability are built into every part, improving output and endurance. For our customers, this can reduce expenditures and operational costs. Our global footprint and channels help to competitively price such components for your chosen application and provide immediate technical support.

Our expertise in aerospace and defense, transportation, medical, and industrial industries means we offer products and solutions for a wide range of applications. But, an impressive product line is only one part. We possess unique engineering expertise and value-added capabilities.

While Honeywell's switch and sensor solutions are suitable for a wide array of basic and complex applications, our custom-



engineered solutions offer enhanced precision, repeatability, and ruggedness. We offer domain knowledge and technology resources, along with a close working relationship, to develop and deliver cost-effective, individually tailored solutions. Whether clean-slate development or simple modifications to an existing design are needed, our expertly engineered solutions help to meet the most stringent requirements with worldclass product designs, technology integration, and customer-specific manufacturing.

With a 75-year legacy in the switch and sensor business, Honeywell S&C has earned a reputation for reliability and excellence. Our strong product designs, Six Sigma Plus manufacturing environment, and robust testing facilities help provide quality out of the box, as well as enhanced, sustainable performance down the line.

Global service, sourcing, and manufacturing. Industry-leading engineers. Value-added assemblies and solutions. Construction to required specifications. A one-stop, full-service, globally competitive supplier... Honeywell Sensing and Control.

## Table of Contents

Airflow Sensors . . . . .	3-4	Silicon Pressure Sensors, Low Pressure Flow-Through . . . . .	12-13
Force Sensors . . . . .	5	Stainless Steel Media Isolated Pressure Sensors . . . . .	14-15
Silicon Pressure Sensors, Ultra Low . . . . .	6-9	Honeywell S&C Core Industry Segments . . . . .	16-17
Silicon Pressure Sensors, Low to Mid . . . . .	10-13	Honeywell S&C Product Portfolio . . . . .	18-19

# Airflow Sensors



Contains advanced microstructure technology to provide a sensitive and fast response to flow, amount/direction of air or other gases. Potential applications include HVAC, gas metering, chromatography, vent hoods, and medical equipment.



Series	Honeywell Zephyr™ HAF	AWM1000	AWM2000	AWM3000
<b>Signal conditioning</b>	amplified	unamplified	unamplified	amplified
<b>Technology</b>	silicon die with thermally isolated heater	silicon die	silicon die	silicon die
<b>Flow/pressure range</b>	200 SCCM	±200 SCCM; 1000 SCCM to -600 SCCM; ±5.0 mbar [2.0 in H <sub>2</sub> O]; ±10.0 mbar [4.0 in H <sub>2</sub> O]	±30 SCCM; ±1000 SCCM; ±10.0 mbar [4.0 in H <sub>2</sub> O]	30 SCCM; 200 SCCM; 1000 SCCM; 0 mbar to 1.25 mbar [0 in H <sub>2</sub> O to 0.5 in H <sub>2</sub> O]; 0 mbar to 5.0 mbar [0 in H <sub>2</sub> O to 2 in H <sub>2</sub> O]; 5.0 mbar [2.0 in H <sub>2</sub> O]
<b>Output</b>	analog (Vdc), digital (I <sup>2</sup> C)	analog	analog	analog
<b>Power consumption</b>	3.3 Vdc: 40 mW typ. (no load) (analog) 23 mW typ. (no load) (digital) 5.0 Vdc: 55 mW typ. (no load) (analog) 38 mW typ. (no load) (digital)	30 mW typ.	30 mW typ.	50 mW or 100 mW typ.
<b>Port style</b>	long port, short port	straight	straight	straight
<b>Media compatibility</b>	dry non-corrosive gases	dry gas only	dry gas only	dry gas only
<b>Operating temperature range</b>	-20 °C to 70 °C [-4 °F to 158 °F]	-25 °C to 85 °C [-13 °F to 185 °F]	-25 °C to 85 °C [-13 °F to 185 °F]	-25 °C to 85 °C [-13 °F to 185 °F]
<b>Measurements (H x W x D)</b>	long port: 20 mm x 36 mm x 19,9 mm [0.79 in x 1.42 in x 0.78 in] short port: 17,6 mm x 28,8 mm x 19,9 mm [0.69 in x 1.13 in x 0.78 in]	12,7 mm x 54,4 mm x 31,5 mm [0.5 in x 2.14 in x 1.24 in]	12,7 mm x 54,4 mm x 31,5 mm [0.5 in x 2.14 in x 1.24 in]	12,7 mm x 54,4 mm x 31,5 mm [0.5 in x 2.14 in x 1.24 in]
<b>Features</b>	high accuracy; high sensitivity at very low flows; high stability; low pressure; linear output; customizable; full calibration and temperature compensation	sensitivity to low flows; enhanced response time; low power consumption; analog output; bidirectional sensing capability	sensitivity to low flows; enhanced response time; low power consumption; analog output; bidirectional sensing capability	sensitivity to low flows; fast response time; low power consumption; analog output; amplified

# Airflow Sensors

Contains advanced microstructure technology to provide a sensitive and fast response to flow, amount/direction of air or other gases. Potential applications include HVAC, gas metering, chromatography, vent hoods, and medical equipment.



Series	AWM5000	AWM700
<b>Signal conditioning</b>	amplified	amplified
<b>Technology</b>	silicon die	silicon die
<b>Flow/pressure range</b>	0 SLPM to 5.0 SLPM; 0 SLPM to 10.0 SLPM; 0 SLPM to 15.0 SLPM; 0 SLPM to 20.0 SLPM	200 SLPM
<b>Output</b>	analog	analog
<b>Power consumption</b>	100 mW max.	60 mW max.
<b>Port style</b>	1/4 in-18 NPT	22 mm tapered
<b>Media compatibility</b>	dry gas only	dry gas only
<b>Operating temperature range</b>	-20 °C to 70 °C [-4 °F to 158 °F]	-25 °C to 85 °C [-13 °F to 185 °F]
<b>Measurements (H x W x D)</b>	35,6 mm x 162,8 mm x 32,3 mm [1.40 in x 6.41 in x 1.27 in]	33,8 mm x 22,9 x 37,0 mm [1.33 in x 0.90 in 1.40 in]
<b>Features</b>	sensitivity to low flows; enhanced response time; low power consumption; analog output; laser trimmed	sensitivity to low flows; enhanced response time; low power consumption; analog output; highly stable



Series	AWM40000	AWM90000
<b>Signal conditioning</b>	unamplified or amplified	unamplified
<b>Technology</b>	silicon die	silicon die
<b>Flow/pressure range</b>	±25.0 SCCM; 1.0 SLPM; 6.0 SLPM	±200 SCCM; ±5.0 mbar [2.0 in H <sub>2</sub> O]
<b>Output</b>	analog	analog
<b>Power consumption</b>	60 mW max. or 75 mW max.	50 mW typ.
<b>Port style</b>	manifold	parallel
<b>Media compatibility</b>	dry gas only	dry gas only
<b>Operating temperature range</b>	-40 °C to 125 °C [-40 °F to 251 °F] (inclusive)	-25 °C to 85 °C [-13 °F to 185 °F]
<b>Measurements (H x W x D)</b>	12,7 mm x 30,5 mm x 30,2 mm [0.50 in x 1.2 in x 1.19 in]	13,08 mm x 30,48 mm x 27,94 mm [0.52 in x 1.2 in x 1.1 in]
<b>Features</b>	sensitivity to low flows; enhanced response time; low power consumption, analog output; laser trimmed	sensitivity to low flows; fast response time; low power consumption; analog output; bidirectional sensing capability

# Force Sensors



Measures the addition or backup of force, meaning the resistance of silicon-implanted piezoresistors will increase when flexed under applied force. Potential applications include infusion pumps, anesthesia monitors, blood pressure equipment, and more.




Series	1865	FS01/FS03
Signal conditioning	calibrated	amplified
Technology	silicon die (piezoresistive)	silicon die (piezoresistive)
Force range	0 psi to 5 psi, 0 psi to 10 psi, 0 psi to 15 psi, 0 psi to 25 psi, 0 psi to 30 psi	0 lb to 1.5 lb, 0 lb to 3.0 lb
Overforce	10 psi, 30 psi, 45 psi, 60 psi	7 lb
Linearity	0.10 % FS typ., BFSL; 0.25 % FS max., BFSL	1.0 % FS typ., BFSL; 3.0 % FS max., BFSL
Operating temperature range	-28 °C to 54 °C [-18 °F to 129 °F]	0 °C to 70 °C [32 °F to 158 °F]
Storage temperature range	-1 °C to 54 °C [30 °F to 129 °F]	5 °C to 50 °C [41 °F to 122 °F]
Measurements (H x W x D)	7,62 mm x 17,145 mm x 17,145 mm [0.30 in x 0.675 in x 0.675 in]	8,26 mm x 17,27 mm x 25,1 mm [0.325 in x 0.68 in x 0.988 in]
Features	pressure measurement for liquid media; 8-pin DIP electrical connection; laser trimmed	high-level output range; calibrated zero and span



Series	FSG	FSS
Signal conditioning	unamplified	unamplified
Technology	silicon die (piezoresistive)	silicon die (piezoresistive)
Force range	0 N to 14,7 N [0 g to 1500 g]	0 N to 14,7 N [0 g to 1500 g]
Overforce	54 N [5500 g]	44 N [4500 g]
Linearity	0.5 % span typ., BFSL	±1.5 % span, BFSL
Operating temperature range	-40 °C to 85 °C [-40 °F to 185 °F]	-40 °C to 85 °C [-40 °F to 185 °F]
Storage temperature range	-55 °C to 105 °C [-67 °F to 221 °F]	-40 °C to 100 °C [-40 °F to 212 °F]
Measurements (H x W x D)	9,0 mm x 12,7 mm x 18,2 mm [0.35 in x 0.50 in x 0.71 in]	3,25 mm x 9,14 mm x 3,81 mm [0.13 in x 0.36 in x 0.15 in]
Features	precision force sensing; ratiometric output; available signal conditioning	precision force sensing; ratiometric output; adaptable product design

# Silicon Pressure Sensors

## Ultra Low Pressure (<1 psi)

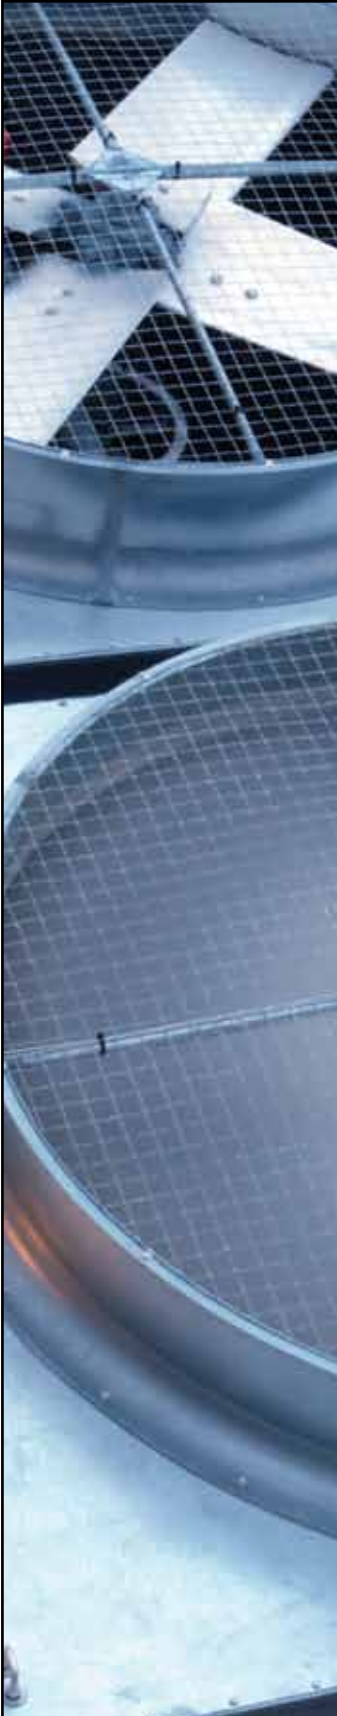

Sensing element design consists of four piezoresistors galvanized with a thin, chemically etched silicon diaphragm that produces a proportional electrical output. Potential applications include dialysis equipment, HVAC devices, data storage, industrial machinery, and more.



Series	ASDX	XPCL	XPXL
<b>Signal conditioning</b>	amplified	unamplified	unamplified
<b>Pressure range</b>	±5 in H <sub>2</sub> O; ±10 in H <sub>2</sub> O	4 in H <sub>2</sub> O to 10 in H <sub>2</sub> O	4 in H <sub>2</sub> O to 10 in H <sub>2</sub> O
<b>Device type</b>	absolute, differential, bidirectional gage	differential, gage	differential, gage
<b>Output</b>	analog (Vdc), digital (I <sup>2</sup> C or SPI)	mV	mV
<b>Calibrated</b>	yes	yes	no
<b>Temperature comp.</b>	yes	yes	no
<b>Accuracy</b>	total error band: ±2.0 %FSS max.	linearity & hysteresis: 0.5 % typ.	linearity & hysteresis: 0.5 % typ.
<b>Mounting options</b>	DIP	SIP	SIP
<b>Operating temperature range</b>	0 °C to 85 °C [32 °F to 185 °F] (compensated)	0 °C to 70 °C [32 °F to 158 °F] (compensated)	-25 °C to 85 °C [-13 °F to 185 °F]
<b>Measurements (H x W x D)</b>	16,6 mm x 13,9 mm x 16,6 mm [0.67 in x 0.55 in x 0.67 in]	20,0 mm x 15,2 mm x 5,3 mm [0.8 in x 0.6 in x 0.21 in]	20,0 mm x 15,2 mm x 5,3 mm [0.8 in x 0.6 in x 0.21 in]
<b>Approvals</b>	RoHS, WEEE	RoHS, WEEE	RoHS, WEEE
<b>Features</b>	ASIC-enhanced output; analog output with 12-bit resolution or 14-bit digital output; enhanced response time and accuracy	small size; constant voltage excitation; high impedance; low current	small size; constant voltage excitation; high impedance; low current



CPCL	CPXL	DCXL-DS	XCAL
unamplified	unamplified	unamplified	amplified
4 in H <sub>2</sub> O, 10 in H <sub>2</sub> O	4 in H <sub>2</sub> O, 10 in H <sub>2</sub> O	±1 in H <sub>2</sub> O to ±10 in H <sub>2</sub> O	±4 in H <sub>2</sub> O to ±10 in H <sub>2</sub> O
absolute, differential, gage	absolute, differential, gage	differential	differential
mV	mV	mV	Vdc
yes	no	yes	yes
yes	no	yes	yes
linearity & hysteresis: 0.5 % typ.	linearity & hysteresis: 0.5 % typ.	linearity & hysteresis: 0.2 % typ.	–
SIP	SIP	SIP	SIP
0 °C to 70 °C [32 °F to 158 °F] (comp.)	-25 °C to 85 °C [-13 °F to 185 °F]	0 °C to 50 °C [32 °F to 122 °F]	0 °C to 50 °C [32 °F to 122 °F] (comp.)
20,1 mm x 9,9 mm x 25,4 mm [0.79 in x 0.39 in x 1.0 in]	20,1 mm x 9,9 mm x 25,4 mm [0.79 in x 0.39 in x 1.0 in]	27,43 mm x 27,94 mm x 13,21 mm [1.06 in x 1.1 in x 0.52 in]	27,43 mm x 27,94 mm x 13,21 mm [1.08 in x 1.1 in x 0.52 in]
RoHS, WEEE	RoHS, WEEE	RoHS, WEEE	RoHS, WEEE

small size; constant voltage excitement; high impedance, low current; tube arrangements with nylon housings

improved stress isolation; reduced output offset errors

constant voltage excitement; ratiometric output

# Silicon Pressure Sensors

## Ultra Low Pressure (<1 psi)

Sensing element design consists of four piezoresistors galvanized with a thin, chemically etched silicon diaphragm that produces a proportional electrical output. Potential applications include dialysis equipment, HVAC devices, data storage, industrial machinery, and more.



Series	XCXL	SCXL
Signal cond.	unamplified	unamplified
Pressure range	±4 in H <sub>2</sub> O to ±10 in H <sub>2</sub> O	4 in H <sub>2</sub> O to 10 in H <sub>2</sub> O
Device type	differential	differential, gage
Output	mV	mV
Calibrated	yes	yes
Temp comp.	yes	yes
Accuracy	linearity & hysteresis: 0.5 % typ.	linearity & hysteresis: 0.2 % typ.
Mounting	SIP	SIP
Operating temp.	0 °C to 70 °C [32 °F to 158 °F] (comp.)	0 °C to 50 °C [32 °F to 122 °F] (comp.)
Measure. (H x W x D)	27,43 mm x 27,94 mm x 13,21 mm [1.08 in x 1.1 in x 0.52 in]	27,43 mm x 27,94 mm x 13,21 mm [1.08 in x 1.1 in x 0.52 in]
Approvals	RoHS, WEEE	RoHS, WEEE
Features	stress-isolated package; ratiometric output	small size; low noise; high impedance, low current







<b>SDX005IND4/SDX010IND4</b>	<b>SXL</b>	<b>DUXL</b>
unamplified	unamplified	unamplified
±5 in H <sub>2</sub> O to ±10 in H <sub>2</sub> O	±10 in H <sub>2</sub> O	1 in H <sub>2</sub> O to 30 in H <sub>2</sub> O
differential, gage	differential, gage	differential, gage
mV	mV	mV
yes	no	yes
yes	no	yes
linearity & hysteresis: 0.2 % typ.	linearity & hysteresis: 0.2 % typ.	linearity & hysteresis: 0.5 % typ.
DIP	DIP	SIP
0 °C to 50 °C [32 °F to 122 °F] (comp.)	0 °C to 50 °C [32 °F to 122 °F]	-25 °C to 85 °C [-13 °F to 185 °F] (comp.)
9,4 mm x 13,97 mm x 11,94 mm [0.37 in x 0.55 in x 0.47 in]	9,4 mm x 13,97 mm x 11,94 mm [0.37 in x 0.55 in x 0.47 in]	7,11 mm x 12,7 mm x 30,48 mm [0.28 in x 0.5 in x 1.20 in]
RoHS, WEEE	RoHS, WEEE	RoHS, WEEE
solvent-resistant case; low noise; high impedance, low current	enhanced accuracy, low pressure readings; high impedance bridge	low profile; small size; ratiometric output

# Silicon Pressure Sensors

Low (1 psi to 15 psi) to Mid (15 psi to 250 psi)



Utilizes a specialized piezoresistive micro-machined sensing element which allows part interchangeability, and enhanced performance, reliability, and accuracy. Potential applications include medical, HVAC, data storage, industrial machinery, pumps, and robotics.



Series	24PC	26PC
<b>Signal conditioning</b>	unamplified	unamplified
<b>Pressure range</b>	0.5 psi to 250 psi (SIP, DIP) 1 psi to 15 psi (SMT)	1 psi to 250 psi (SIP, DIP) 1 psi to 15 psi (SMT)
<b>Device type</b>	absolute, differential, wet-wet differential, gage, vacuum gage	differential, wet-wet differential, gage, vacuum gage
<b>Output</b>	mV	mV
<b>Calibrated</b>	no	yes
<b>Temperature comp.</b>	no	yes
<b>Accuracy</b>	linearity & hysteresis: 0.5 % typ.	linearity & hysteresis: 0.5 % typ.
<b>Mounting options</b>	DIP, SIP, SMT	DIP, SIP, SMT
<b>Operating temp.</b>	-40 °C to 85 °C [-40 °F to 185 °F]	0 °C to 50 °C [32 °F to 122 °F] (comp.)
<b>Measurements (H x W x D)</b>	SIP, DIP: 27,94 mm x 12,7 mm x 16,0 mm [1.10 in x 0.5 in x 0.63 in] SMT: 7,87 mm x 10,41 mm x 10,92 mm [0.31 in x 0.41 in x 0.43 in]	SIP, DIP: 27,94 mm x 12,7 mm x 16,0 mm [1.10 in x 0.5 in x 0.63 in] SMT: 7,87 mm x 10,41 mm x 10,92 mm [0.31 in x 0.41 in x 0.43 in]
<b>Approvals</b>	RoHS, WEEE	RoHS, WEEE
<b>Features</b>	SIP, DIP: true wet/wet differential sensing; miniature package; operable after exposure to frozen conditions; choice of termination for gage sensors SMT: true wet/wet differential sensing; pick-up feature; maximum peak reflow temperature of 260° [500 °F]; end-point calibration; elastomeric construction	SIP, DIP: true wet/wet differential sensing; miniature package; operable after exposure to frozen conditions; choice of termination for gage sensors SMT: true wet/wet differential sensing; pick-up feature; maximum reflow temperature of 260° [500 °F]; end-point calibration; elastomeric construction



CPC	CPX	ASDX	SDX
unamplified	unamplified	amplified	unamplified
1 psi to 150 psi	1 psi to 150 psi	1 psi to 100 psi	1 psi to 100 psi
absolute, differential, gage	absolute, differential, gage	absolute, differential, gage, bidirectional	absolute, differential, gage
mV	mV	analog (Vdc), digital (I <sup>2</sup> C or SPI)	mV
yes	no	yes	yes
yes	no	yes	yes
linearity & hysteresis: 0.5 % typ.	linearity & hysteresis: 0.5 % typ.	total error band: ±2.0 %FSS max.	linearity & hysteresis: 0.25 % typ.
SIP	SIP	DIP	DIP
0 °C to 70 °C [32 °F to 158 °F] (comp.)	-25 °C to 85 °C [-12 °F to 185 °F]	0 °C to 85 °C [32 °F to 185 °F] (comp.)	0 °C to 50 °C [32 °F to 122 °F] (compensated)
20,1 mm x 9,9 mm x 25,4 mm [0.79 in x 0.39 in x 1.0 in]	20,1 mm x 9,9 mm x 25,4 mm [0.79 in x 0.39 in x 1.0 in]	16,6 mm x 13,9 mm x 16,6 mm [0.67 in x 0.55 in x 0.67 in]	16,6 mm x 13,9 mm x 16,6 mm [0.67 in x 0.55 in x 0.67 in]
RoHS, WEEE	RoHS, WEEE	RoHS, WEEE	RoHS, WEEE
small size; constant voltage excitement; high impedance, low current	small size; constant voltage excitement; high impedance, low current	ASIC-enhanced output; analog or 12-bit digital output	small size; low noise; high impedance; corrosion resistant; available in two grades

# Silicon Pressure Sensors

Low (1 psi to 15 psi) to Mid (15 psi to 250 psi) and Low

Utilizes a specialized piezoresistive micro-machined sensing element which allows part interchangeability, and enhanced performance, reliability, and accuracy. Potential applications include medical, HVAC, data storage, industrial machinery, pumps, and robotics.



Series	TruStability® HSC	TruStability® SSC	SCC
<b>Signal conditioning</b>	amplified	amplified	unamplified
<b>Pressure range</b>	1 psi to 150 psi (60 mbar to 10 bar)	1 psi to 150 psi (60 mbar to 10 bar)	SIP, DIP: 1 psi to 100 psi SMT: 1 psi to 150 psi
<b>Device type</b>	absolute, differential, gage	absolute, differential, gage	absolute, differential, gage
<b>Output</b>	analog (Vdc); digital (I <sup>2</sup> C or SPI)	analog (Vdc); digital (I <sup>2</sup> C or SPI)	mV
<b>Calibrated</b>	yes	yes	no
<b>Temperature comp.</b>	yes	yes	yes
<b>Accuracy</b>	total error band: ±1 %FSS; linearity & hysteresis: ±0.25 %FSS BFLS	total error band: ±2 %FSS; linearity & hysteresis: ±0.25 %FSS BFLS	SIP, DIP: linearity & hysteresis: 0.2 % typ.; SMT: linearity, hysteresis & repeatability: 0.2 % typ.
<b>Mounting options</b>	DIP, SIP, SMT	DIP, SIP, SMT	DIP, SIP, SMT
<b>Operating temp.</b>	-20 °C to 85 °C [-4 °F to 185 °F] (compensated)	-20 °C to 85 °C [-4 °F to 185 °F] (compensated)	0 °C to 50 °C [32 °F to 122 °F] (comp.)
<b>Measurements (H x W x D)</b>	varies by package style	varies by package style	SIP, DIP: varies by package style SMT: 7,6 mm x 7,6 mm x 8,7 mm [0.3 in x 0.3 in x 0.34 in]
<b>Approvals</b>	RoHS, WEEE	RoHS, WEEE	RoHS, WEEE
<b>Features</b>	industry-leading long-term stability; liquid media option extends performance to non-corrosive, non-ionic liquids	industry-leading long-term stability; liquid media option extends performance to non-corrosive, non-ionic liquids	SIP, DIP: reduced cost; small size SMT: high impedance bridge; low power consumption; lidded or ported versions

Features a sensing technology that utilizes a specialized piezoresistive micro-machined sensing element. Potential uses include measuring vacuum or positive pressure in medical and environmental applications.



Series	24PC Flow-Through
<b>Signal conditioning</b>	unamplified
<b>Pressure range</b>	15 psi to 30 psi
<b>Device type</b>	flow-through gage
<b>Output</b>	mV
<b>Calibrated</b>	no
<b>Temperature comp.</b>	no
<b>Accuracy</b>	linearity & hysteresis: 0.75 % typ.
<b>Mounting options</b>	SIP
<b>Operating temperature range</b>	-40 °C to 85 °C [-40 °F to 185 °F]
<b>Measurements (H x W x D)</b>	8,89 mm x 25,65 mm x 12,7 mm [0.35 in x 1.01 in x 0.50 in]
<b>Approvals</b>	RoHS, WEEE
<b>Features</b>	miniature package; media flow-through port; operable after exposure to frozen conditions; choice of termi



# Pressure Flow-Through (1 psi to 100 psi)



SX	SCX	XPC	XPX
unamplified	unamplified	unamplified	unamplified
1 psi to 150 psi	1 psi to 150 psi	1 psi to 150 psi	1 psi to 150 psi
absolute, differential, gage	absolute, differential, gage	absolute, differential, gage	absolute, differential, gage
mV	mV	mV	mV
no	yes	yes	no
no	yes	yes	no
SIP, DIP: linearity & hysteresis: 0.2 % typ. SMT: linearity, hysteresis & repeatability: 0.2 % typ.	linearity & hysteresis: 0.3 % typ.	linearity & hysteresis: 1.0 % typ.	linearity & hysteresis: 1.0 % typ.
DIP, SIP, SMT	SIP	SIP	SIP
SIP, DIP: -40 °C to 85 °C [-40 °F to 185 °F] SMT: -40 °C to 125 °C [-40 °F to 257 °F]	0 °C to 70 °C [32 °F to 158 °F] (compensated)	0 °C to 70 °C [32 °F to 158 °F] (compensated)	-25 °C to 85 °C [-13 °F to 185 °F]
SIP, DIP: varies by package style SMT: 7,6 mm x 7,6 mm x 8,7 mm [0.3 in x 0.3 in x 0.34 in]	26,3 mm x 27,9 mm x 27,4 mm [1.03 in x 1.10 in x 1.08 in]	20,0 mm x 15,2 mm x 5,3 mm [0.8 in x 0.6 in x 0.21 in]	20,0 mm x 15,2 mm x 5,3 mm [0.8 in x 0.6 in x 0.21 in]
RoHS, WEEE	RoHS, WEEE	RoHS, WEEE	RoHS, WEEE
SIP, DIP: cost effective; small size; low noise; high impedance bridge SMT: high impedance bridge; low power consumption; lidded or ported versions	small size; low noise; enhanced accuracy; high impedance; corrosion resistant	small size; constant voltage excitation; high impedance; low current	small size; constant voltage excitation; high impedance; low current



## 26PC Flow-Through

unamplified
1 psi to 100 psi
flow-through gage
mV
yes
yes
linearity & hysteresis: 0.35 % typ.
SIP
0 °C to 50 °C [32 °F to 122 °F] (compensated)
8,89 mm x 25,65 mm x 12,7 mm [0.35 in x 1.01 in x 0.50 in]
RoHS, WEEE

nation for gage sensors

# Pressure Sensors

## Stainless Steel Media Isolated



Known for enhanced quality, reliability, and durability. Engineered with fully steel media isolating with stainless steel or aerospace alloys and no internal elastomeric seals. Resistant to harsh, aggressive media, and challenging environments. Potential applications include compressors, hydraulic controls, and in industries such as aerospace, medical, transportation, agriculture, refrigeration, and industrial.



Series	13mm	19mm
<b>Pressure connection</b>	ring with back support, 1/8-27 NPT, 1/4-18 NPT, 7/16 UNF	cell with body o-ring, flush mount, flush mount with flange, 1/8-27 NPT, 1/4-18 NPT, 7/16 UNF, 1/4 BSPP, Euro o-ring, 1/4 VCR (female nut)
<b>Measurement type</b>	absolute, sealed gage	absolute, gage, vacuum gage
<b>Construction</b>	wetted parts 316L SS	wetted parts 316L SS
<b>Pressure range</b>	0 psi to 500 psi through 0 psi to 5000 psi	0 psi to 3 psi through 0 psi to 500 psi
<b>Output signal</b>	0 mV to 100 mV (nominal)	0 mV to 150 mV (nominal)
<b>Accuracy</b>	±0.25 % BFSL max.	±0.25 % BFSL max.
<b>Amplified</b>	no	no
<b>Compensated temperature range</b>	0 °C to 82 °C [32 °F to 180 °F]	0 °C to 82 °C [32 °F to 180 °F]
<b>Termination</b>	ribbon cable	ribbon cable
<b>Measurements (H x W x D)</b>	varies by body type	varies by body type
<b>Approvals</b>	–	–
<b>Features</b>	isolated stainless steel package; voltage or current supply options; accommodates media that will not adversely affect 316SS	isolated stainless steel package; vacuum compatible; accommodates media that will not adversely affect 316SS



## MLH

1/4-18 NPT; M12 x 1.5 (ISO 6149); M14 x 1.5 (ISO 6149); 3/8-24 UNF (SAE-3 O-ring boss); M18 x 1.5 (ISO 6149); 1/8 in-27 NPT; 1/2 in-20 UNF (SAE-5 O-ring boss); M10 x 1 (ISO 6149); 1/4 in SAE female Schrader (7/16-20 UNF-2B internal thread); 7/16-20 UNF (SAE-4 O-ring boss); 1/2 in NPT; 9/16-18 UNF (SAE-6 O-ring boss); R 1/4-19 BSPT (ISO 7-1 tapered thread); G 1/4-19 (DIN 3852-2); G 1/8 with O-ring groove; M16 x 1.5 (ISO 6149); G 1/4 with O-ring groove; G 1/8 (DIN 3852-2); R 1/8-28 BSPT (ISO 7-1 tapered thread); M20 x 1.5 (ISO 6149); 1/2-20 (SAE J514)

gage, sealed gage

port - 304L stainless steel; diaphragm - Haynes 214 alloy

0 psi to 50 psi through 0 psi to 8000 psi

0.5 Vdc to 4.5 Vdc ratiometric from 5 Vdc excitation; 4 mA to 20 mA; 1 Vdc to 6 Vdc regulated; 0.25 Vdc to 10.25 Vdc regulated; 0.5 Vdc to 4.5 Vdc regulated; 1 Vdc to 5 Vdc regulated

±0.25 % full scale BFSL  
(±0.5 % full scale BFSL on ranges below 100 psi)

yes

ratiometric output: -40 °C to 125 °C [-40 °F to 257 °F]  
regulated and 4 mA to 20 mA outputs: -40 °C to 125 °C [-40 °F to 257 °F]  
(See product literature for operating and temperature compensated area graphics.)

Delphi Metri-Pack 150; Hirschmann (mates with G4W1F); M12 x 1 (Brad Harrison micro); DIN 43650-C, 8 mm-male; Amp Superseal 1.5; cable (1 m); cable (3 m); flying leads (20 AWG – 6 in); Deutsch DTM04-3P (integral)

27,0 mm x 27,0 mm x 55 mm  
[1.06 in x 1.06 in x 2.18 in]

UL component recognition for USA/Canada: file no. E258956

all-wetted parts; no internal elastomeric seals; stable and creep-free; input reverse voltage protection; less than 2 ms response time; easy customization; exceeds CE heavy industrial EMC for use in areas of high RFI/EMI

## SPT

1/8-27 NPT, 1/4-18 NPT, 7/16-20 UNF, 1/4-19 BSPP, 1/4 VCR gland

absolute, gage, sealed gage, vacuum gage pressures

wetted parts 316L SS

0 psi to 3 psi through 0 psi to 5000 psi

4 mA to 20 mA, 0 mV to 100 mV, 1 Vdc to 5 Vdc

±0.25 % BFSL max.

yes, amplified and unamplified

-10 °C to 85 °C [14 °F to 185 °F]

bayonet connector, cable

22,2 mm x 22,2 mm x length varies  
[0.875 in x 0.875 in x length varies]

–

calibrated and temperature compensated; NEMA 4 design; rugged 316 stainless steel wetted parts



As one of the world's leading providers of sensors and switches, Honeywell understands and meets the requirements of a wide variety of industries.

Honeywell Sensing and Control is a global leader in providing reliable, cost-effective sensing and switching solutions for our customers' applications. We serve thousands of customers in four core industry segments: industrial, medical equipment, transportation, and aerospace/military products.

### **Aerospace**

Aerospace applications are among the most demanding for any type of product. Rigorous FAA requirements, extreme environments (temperature, shock, vibration, the need for hermetic sealing), and the ability to customize devices are just a few of the parameters often required of sensors and switches in these applications. Aerospace customers typically value speed in prototyping and development, and Honeywell's vertically integrated, AS9100-approved manufacturing locations enhance our ability to produce devices in a wide variety of packages. The precision output of our products helps reduce risk and cost in key applications while also minimizing the need for unscheduled maintenance.

Honeywell's in-depth aerospace engineering experience allows us to work with customers in the design and development of

products that best meet the specified requirements of their individual applications. Making products simple to install makes the job easier every step of the way. And, the odds are that Honeywell is already on the list of trusted suppliers for many aerospace companies, underscoring the decades of experience we bring to this field.

Honeywell products for this industry (many of them PMA-certified) include force sensors, load cells, potentiometers, pilot controls, pressure sensors, pressure switches, resolvers, sensor/actuator assemblies for systems ranging from aerostructures to fuel control to flight surfaces, speed sensors, temperature probes, thermostats, torque sensors, y-guides for cargo systems, MICRO SWITCH™ sealed and high-accuracy switches, MICRO SWITCH™ pushbutton switches, and MICRO SWITCH™ rocker and toggle switches.



## Medical

Medical applications typically require sensors and switches that are highly stable and extremely reliable to enhance patient safety and comfort. Stability is often essential to minimize long term drift, reduce the need for recalibration, and improve ease of use for medical equipment operators. Reliability enhances patient safety in life-critical applications, reduces downtime, and improves test throughput in applications such as clinical diagnostics. The product needs to be easy to use and easy to design into a system, so Honeywell's extensive customization and built-in calibration/amplification capabilities are strong benefits. Confidence in Honeywell's product performance, reliability, and availability provide peace of mind for medical equipment manufacturers who choose Honeywell.

Honeywell offerings for this industry include airflow sensors, silicon and stainless steel media isolated pressure sensors, Hall-effect magnetic position sensors, humidity sensors, flexible heaters, force sensors, thermostats, commercial solid state sensors, infrared sensors, oxygen sensors, pressure and vacuum switches, potentiometers and encoders, MICRO SWITCH™ pushbutton, rocker, and toggle switches, and hour meters.

## Industrial

The industrial arena can be a rough one. From high-speed food processing to high-force stamping applications, reliable and cost-effective sensors and switches often help minimize repair costs, maximize system life, and reduce overall system expense. Durability can mean the difference between smooth-running processes and expensive downtime. Accurate, repeatable sensor or switch output can reduce the need for calibration once the device is applied. Because of the wide variety of potential applications, Honeywell's ability to deliver a customized product that can meet virtually any size, weight, and power requirement – as well as any packaging stipulations for tough, harsh environments – often makes it easy to incorporate and use our

devices. Safety is another important consideration for industrial users, and our products meet a wide variety of regulatory safety requirements.

Honeywell's industrial product line includes airflow sensors, current sensors, humidity sensors, fiber-optic and liquid-level sensors, linear position sensors, oxygen sensors, pressure sensors, potentiometers and encoders, speed sensors, temperature probes, ultrasonic sensors, wirewound resistors, thermostats, commercial solid state sensors, flex heaters, SMART position sensors, silicon and stainless steel media isolated pressure sensors, force sensors, safety light curtains, push-pull switches, and MICRO SWITCH™ basic switches, hazardous area switches, safety switches, key and rotary switches, limit switches, sealed and high-accuracy switches, pushbutton, rocker, toggle switches, and relays.

## Transportation

Getting from Point A to Point B is often challenging for end-customers of transportation providers – Honeywell aims to make the trip easier with highly reliable, cost-effective switches and sensors. Our products are designed to support rigorous engine requirements, and their efficiency can also help optimize engine performance. Customization is often required to allow a switch or sensor to be mounted in tight or challenging environments including vibration, temperature extremes, and road contamination. The durability of Honeywell products enhances system reliability, which is also boosted by the stable, accurate output of our devices. All of these capabilities allow demanding customers to rely on Honeywell's many years of experience in the transportation industry.

Honeywell products for transportation applications include Hall-effect rotary position sensors, inertial measurement units, infrared sensors, keyless entry sensors, magnetic position sensors, pressure sensors, speed and direction sensors, ultrasonic sensors, thermostats, temperature probes, commercial solid state sensors, SMART position sensors, and MICRO SWITCH™ pushbutton, rocker, and toggle switches.



# Sensing and Control Product Portfolio

Product reliability. Industry knowledge. Expertise. Standard with every order.

With more than 50,000 sensing, switching, and control products ranging from snap-action, limit, toggle, and pressure switches to position, speed, pressure, and airflow sensors, Honeywell Sensing and Control has one of the broadest sensing and switching portfolios available.

## SENSORS



**Airflow sensors:** Advanced microstructure technology. Sensitive and fast response to flow, amount/direction of air or other gas. Proportional output voltage. Thin-film, thermally isolated bridge structure consists of a heater and temperature sensing elements. **May be used in:** HVAC, respirators, process control, oxygen concentrators, gas metering, chromatography, leak detection equipment, medical/analytical instrumentation, and ventilation equipment.



**Current sensors:** Accurate and fast response. Almost no thermal drift or offset with temperature. Adjustable linear, null balance, digital, and linear current sensors. **May be used in:** Variable speed drives, overcurrent protection, power supplies, ground fault detectors, robotics, industrial process control, and wattmeters.



**Flexible heaters:** Flat, molded-to-shape, spiral wrap, transparent, composite, and high temperature configurations with single, multiple, and variable watt densities. Can be bonded parts or combined. **May be used in:** Airborne valves, outdoor cameras, LCD displays, scanners, and telecommunication.



**Force sensors:** Variety of package styles and various electrical interconnects including pre-wired connectors, printed circuit board mounting, and surface mounting for flexibility. **May be used in:** Infusion and syringe pumps, blood pressure equipment, pump pressure, drug delivery systems, occlusion detection, and kidney dialysis machines.



**Humidity sensors:** Configured with integrated circuitry. Provide on-chip signal conditioning with interchangeability of  $\pm 3\%$  accuracy and out-of-the-box reliability. Standardized, platform-based sensors. **May be used in:** Air compressors, food and beverage packaging and processing, HVAC, printing presses, and office equipment.



**Infrared sensors:** IREDS, sensors, and assemblies for object presence, limit and motion sensing, position encoding, and movement encoding. Variety of package styles, materials, and terminations. **May be used in:** Printers/copiers, motion control systems, metering, data storage systems, scanning, automated transaction, drop sensors, and non-invasive medical equipment.



**Magnetic sensors:** Digital and analog Hall-effect position ICs, magnetoresistive position ICs, Hall-effect vane, gear-tooth, and magnetic sensors. **May be used in:** Speed and RPM sensing, motor/fan control, magnetic encoding, disc speed, tape, flow-rate sensing, conveyors, ignitions, motion control/detection, power/position, magnetic code reading, vibration, and weight sensing.



**Position sensors:** The **SMART position sensor** measures linear or angular position of a magnet attached to a moving object so that the object's position can be determined or controlled. Its simple, non-contact design eliminates mechanical failure mechanisms, reduces wear and tear, improves reliability and durability, enhances operation efficiency and safety, and minimizes downtime. **May be used in:** valve position, material handling, plastic molding, cutting/slitting, wafer handling, CNC machines, passenger bus level position, truck-mounted crane outrigger position, heavy equipment attachment identification, aerial work lift platform, front loader and digger/excavation boom position, robotically assisted surgery equipment position. **Potentiometer sensors** measure linear, rotary position or displacement. Honeywell's proprietary conductive plastic delivers extensive temperature range and infinite resolution, and provides precision position measurement. **May be used in:** robotic motion control, marine steering, and in-tank level sensing. **Ultrasonic sensors** measure time delays between emitted and echo pulses, often accurately determining the sensor-to-target distance. These non-contact-based products solve the toughest sensing problems by detecting targets made of virtually any material, regardless of color, transparency, shine or opacity. **May be used in:** level measurement, height and thickness sensing, and diameter control.



**Pressure sensors - silicon:** Full line of industrial-grade sensors: media-isolating design, multiple ports and outlets, and electrical configurations. **May be used in:** Pneumatic controls, air compressors, process monitoring, hydraulic controls, VAV controls, clogged filter detection, presence/absence of flow, transmissions, and refrigeration.



**Pressure sensors - stainless steel media isolated:** Bonded strain gage technology. Very resistant to effects of shock, vibration, and hostile environments. **May be used in:** HVAC, hydraulic controls, suspensions, agricultural equipment, engines, compressors, robotics, industrial and automotive systems, pressure transmitters, process controls, and medical diagnostics.



**Proximity sensors:** Designed to meet demanding temperature, vibration, shock, and EMI/EMP interference requirements. Number of housing materials and termination styles. **May be used in:** Aircraft landing gear, gun turret position control, and door and hatch open/closed monitoring.



**Rotary position sensors:** Digital and analog Hall-effect, magnetoresistive, and potentiometric devices and resolvers for sensing presence of a magnetic field or rotary position. Directly compatible with electronic circuits for application flexibility. **May be used in:** Audio and lighting, frequency, temperature, position, medical/instrumentation, computer peripherals, manual controls, joysticks, telecom, welding, heating, and aerospace.



**Speed sensors:** Measure speed, position, and presence detection utilizing magnetoresistive, variable reluctance, Hall-effect, variable inductance, and Spiral technologies. **May be used in:** Cam and crankshafts, transmissions, fans, pumps, mixers, rollers, compressors, industrial process control, engines/motors, wheels, and tachometers.



**Temperature sensors:** Customized probes, thermistors, and RTD sensors. Plastic/ceramic, miniaturized, surface-mount housings, and printed circuit board terminations. **May be used in:** Semiconductor protection, vending machines, power generation, hydraulic systems, thermal management, and temperature compensation.



**Thermostats:** Commercial and precision snap-action. Automatic or manual reset options, phenolic or ceramic housings. **May be used in:** Telecommunications, battery heater controls, computers, copy machines, fax machines, food service, food carts, small and major appliances, heat and smoke detectors, and HVAC equipment.



**MICRO SWITCH™ rocker switches:** Wide range of electrical and display design. Many shapes, sizes, and configurations to enhance manual operation. **May be used in:** Transportation, agricultural and construction equipment, test equipment, heavy-duty machinery, marine equipment, small appliances, telecom, medical instrumentation, and commercial aviation.



**MICRO SWITCH™ toggle switches:** Wide range of electrical and display design. Available in many shapes, sizes, and configurations. **May be used in:** Aerial lifts, construction equipment, agriculture and material-handling equipment, factory-floor controls, process control, medical instrumentation, test instruments, and military/commercial aviation.



**MICRO SWITCH™ aerospace-grade pressure switches:** lightweight, compact pressure switches sense changes in gas/pressure. Qualified to MIL-PFR-8805. Lower operating force provides application versatility with enhanced precision. Design modularity allows for configuration of the switch, facilitating rapid customization to the precise, demanding requirements. **May be used in:** aerospace systems -including engines, fuel pressure, and hydraulic systems, military ground vehicles, ordnance and munitions release systems, military maritime systems.



**Pressure and vacuum switches:** Feature set points from 0.5 psi to 3000 psi. Rugged components have enhanced repeatability, flexibility, and wide media capability. **May be used in:** Transmissions, hydraulics, brakes, steering, generators/compressors, dental air, embalming equipment, oxygen concentrators, air cleaners, fuel filters, and pool water pressure.

## ELECTROMECHANICAL SWITCHES



**MICRO SWITCH™ snap-action series:** Snap-action precision switches. Compact. Lightweight. Designed for repeatability and enhanced life. Premium and standard snap-action switches: standard, miniature, subminiature, hermetically sealed, and high-temperature versions. **May be used in:** Vending machines, communication equipment, HVAC, appliances, electronic gaming machinery, valve controls, irrigation systems, foot switches, pressure, and temperature controls.



**MICRO SWITCH™ hazardous area switches:** Flame path designed to contain and cool escaping hot gases that could cause an explosion. MICRO SWITCH™ EX, BX, CX, and LSX Series. **May be used in:** Grain elevators and conveyors, off-shore drilling, petrochemical, waste-treatment plants, control valves, paint booths, and hazardous waste handling facilities.



**Key and rotary switches:** Used on machinery in harsh environments. O-rings help keep dirt and moisture out and prolong life. **May be used in:** All-terrain vehicles, golf carts, snowmobiles, scissor lifts, telehandlers, construction and marine equipment, skid loaders, agricultural equipment, material handlers.



**MICRO SWITCH™ limit switches:** Broadest and deepest limit switch portfolio. Rugged, dependable position detection solutions. MICRO SWITCH™ heavy-duty limit switches (HDLS) and global limit switches. Hermetically and environmentally sealed switches. **May be used in:** Machine tools, woodworking, textile, and printing machinery, metal fabrication, balers/compactors, forklifts, bridges, robotics, wind turbines, elevators, moving stairs, doors, dock locks/levelers, aerial lifts, cranes, conveyors, rail, shipboards, and dock side.



**MICRO SWITCH™ sealed and high accuracy switches:** Precision 'snap action' mechanisms. Wide variety of actuators, terminations, circuitry configurations, electrical ratings, contact materials, and operating characteristics. **May be used in:** Landing gear, flap/stabilizer controls, thrust reversers, space vehicles, armored personnel carriers, de-icer controls, wingfold actuators, industrial environments, valves, and underwater.



**MICRO SWITCH™ pushbutton switches:** Lighted or unlighted. Wide range of electrical and display design, pushbuttons, and manual switches. Many shapes, sizes, and configurations. Easy to apply, operate, and maintain. **May be used in:** Control boards and panels, industrial and test equipment, computers, medical instrumentation, and aerospace.

## WIRELESS SWITCHES



**Limitless™ Series:** Combines the best of MICRO SWITCH™ limit switches with latest commercial wireless technology. Beneficial for remote monitoring where wiring/maintenance is not physically possible or economically feasible. Used for position sensing and presence/absence detection. **May be used in:** valve position, crane boom/jib/skew position, lifts, material handling, presses, construction/ag machines, conveyors, remote/temporary equipment, grain diverters or flaps, and door position.

## SAFETY PRODUCTS



**MICRO SWITCH™ safety switches:** For operator point-of-operation protection, access detection, presence sensing, gate monitoring, and electrical interfacing. High-quality, dependable, cost-effective solutions. **May be used in:** Packaging and semi-conductor equipment, plastic-molding machinery, machine tools, textile machines, lifts, industrial doors, balers, compactors, aircraft bridges, telescopic handlers, refuse vehicles.



**Safety light curtains:** Different resolutions permit detection of an approaching finger, hand, limb, or body. Separate or self-contained control units, various housing sizes, resolutions, scanning ranges, and protection heights. **May be used in:** Point-of-operation protection, access detection, presence sensing, gate monitoring, electrical-to-machine-circuitry interfacing, emergency stop circuits on machines, sliding door protection, conveyors, and transfer lines.

## Warranty/Remedy

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective.

**The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

## Find out more

To learn more about Honeywell's sensing and control products, call **+1-815-235-6847**, email inquiries to **info.sc@honeywell.com**, or visit **www.honeywell.com/sensing**

## Honeywell Sensing and Control

1985 Douglas Drive North  
Golden Valley, MN 55422  
www.honeywell.com

### **WARNING**

#### **MISUSE OF DOCUMENTATION**

- The information presented in this literature is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

#### **For products not designed for safety applications:**

### **WARNING**

#### **PERSONAL INJURY**

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

#### **For products designed for safety applications:**

### **WARNING**

#### **RISK TO LIFE OR PROPERTY**

Never use this product for an application involving serious risk to life or property without ensuring that the system as a whole has been designed to address the risks, and that this product is properly rated and installed for the intended use within the overall system.

**Failure to comply with these instructions could result in death or serious injury.**

# Honeywell