

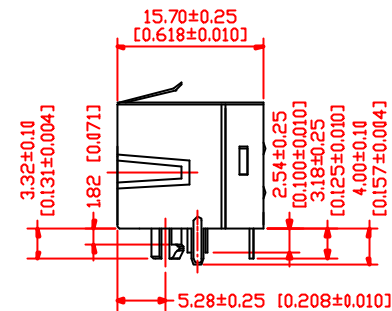
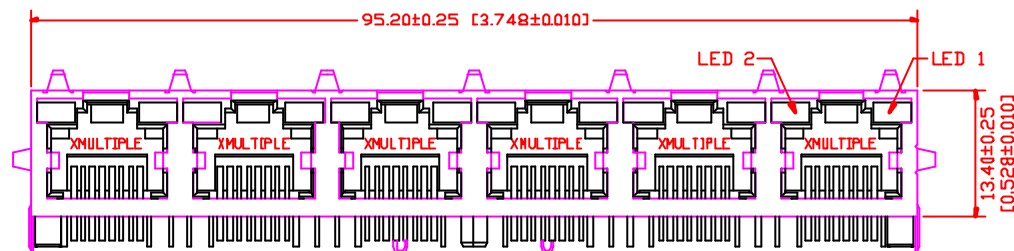


BI-COLOR LED DETAIL
(RED, RED/YELLOW, GREEN/ORANGE
LED'S ARE ALSO AVAILABLE)

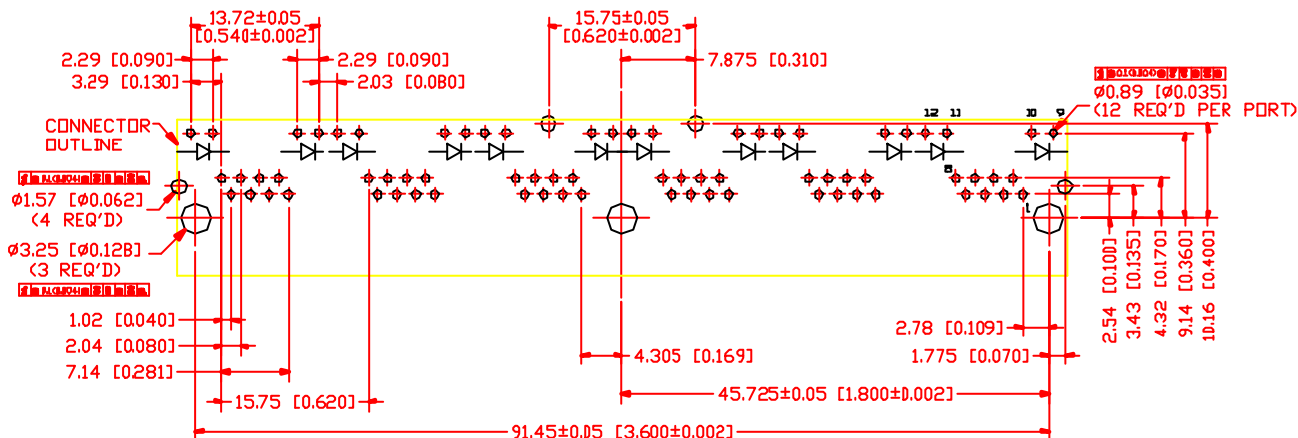

SUGGESTED PCB LAYOUT

PCB LAYOUT
TOLERANCE
.XX±0.05[0.002]

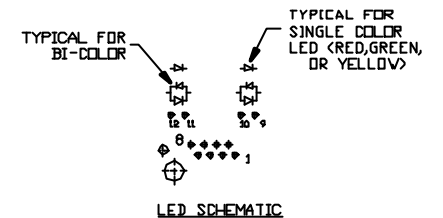

LED Color Options Table

LED Color Options		LED DASH OPTION
Position 2(Left)	Position 1(Right)	
No LED	No LED	0
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9

1. MATERIALS

HOUSING: HIGH TEMP. THERMOPLASTIC, BLACK, UL 94V-0
CONTACTS: 0.014 INCHES (0.35 MILLIMETERS) THICK PHOSPHOR BRONZE PLATED WITH 150 MICROINCHES (3.81 MICROMETERS) MINIMUM THICK TIN LEAD IN SOLDER AREA 15 MICROINCHES (0.38 MICROMETERS) MINIMUM GOLD IN LOCALIZED PLATE AREA ENTIRE CONTACTS PLATED WITH 50 MICROINCHES (1.27 MICROMETERS) MINIMUM THICK NICKEL. SHIELDED 0.0098 INCHES (0.25 MILLIMETERS) THICK COPPER ZINC ALLOY PLATED WITH 30 MICROINCHES (0.762 MICROMETERS) MINIMUM THICK NICKEL

2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

3. PART NUMBER: XRJM-S-06-8-8-X

REFER TO LED OPTIONS TABLE FOR ORDERING CODES

NOTES:

UNLESS OTHERWISE SPECIFIED
UNSPECIFIED TOLERANCE: .XX±0.25[0.010]
.X±0.30[0.012]

XMULTIPLE

XMULTIPLE AREA 2700 Hwy 101, Suite 101 San Jose, CA 95131		XMULTIPLE DESK 2700 Hwy 101, Suite 101 San Jose, CA 95131		DATE REV BY CHK	
THIS DRAWING IS A CONTROLLED DOCUMENT.					
TITLE: RJ45, Connectors, V/LED, BP, SD, Shielded, Thru-Hole					
PART NO: XRJM-S-06-8-8-X					
DRAWN BY: [Signature]		CHECKED BY: [Signature]		DATE: 10/10/01	
1 of 1		A		20/01/01	