

High Reliability 0.36-inch (9.2mm) Dual-Digit 7-Segment Numeric Displays

SND-3620 SND-3627

GENERAL DESCRIPTION

The SND-3620 and the SND-3627 series are high degree of reliability epoxy resin molded 2-digit 7-segment LED displays of which character height is 0.36 -inch (9.2mm) and available in red, green, orange and yellow-green emitting colors. The standard units are constructed with black face and milky white segment color.

PACKAGE DIMENSIONS




Actual size

FEATURES


1. High brightness and high contrast
2. Low power consumption; Directly drive with I.C
3. Wide angle viewing
4. Solid state reliability; Long operation life
5. Cathode-common (SND-3620) and anode-common (SND-3627) types available

PIN ARRANGEMENT

(Top View)

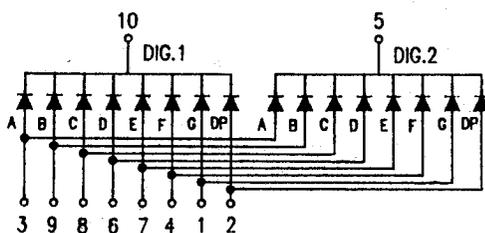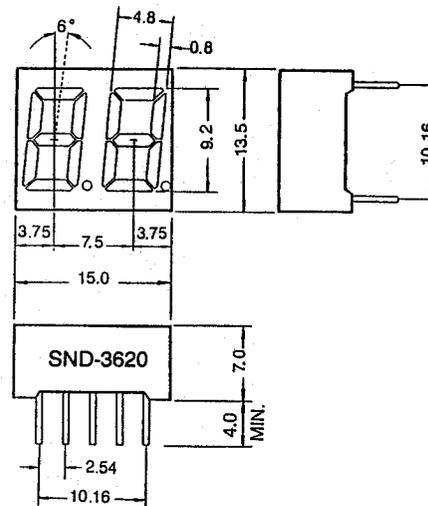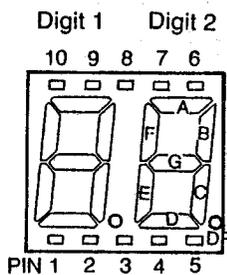

SND-3620 (Cathode Common)

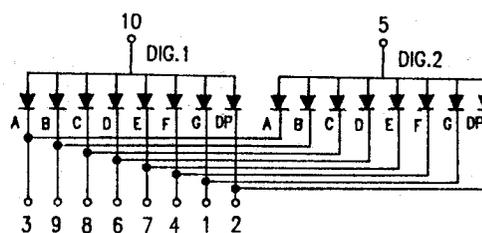

SND-3627 (Anode Common)

三光半導体株式会社
SAM KWANG SEMICONDUCTOR CO., LTD.

803 Silla Techno Vil., 39-3 Dang-dong Kunpo-City Kyungki-do, Korea,
TEL:031-456-1444/1484, FAX:031-456-4224

Red SND 3620/3627R (GaP)

Absolute Maximum Ratings (T_a = 25°C)

| | | |
|-------------------------|------------|----|
| Power dissipation/Total | 640 | mW |
| Power dissipation/Seg | 40 | mW |
| Forward current | 20 | mA |
| Peak forward current | 60* | mA |
| Reverse voltage | 4 | V |
| Operating temperature | -25 ~ +85 | °C |
| Storage temperature | -55 ~ +100 | °C |

Electrical/Optical Characteristics (T_a = 25°C)

| Parameter | Symbol | Conditions | Min | Typ | Max. | Unit |
|--------------------------|----------------|-----------------------|-----|-----|------|------|
| Forward voltage/Seg | V _F | I _F = 10mA | — | 2.1 | 2.3 | V |
| Reverse current/Seg | I _R | V _R = 4V | — | — | 10 | μA |
| Luminous intensity/digit | I _v | I _F = 10mA | 300 | 800 | — | μcd |
| Peak wavelength | λ _P | I _F = 10mA | — | 700 | — | nm |
| Spectral line halfwidth | Δλ | I _F = 10mA | — | 100 | — | nm |

Green SND 3620/3627G (GaP)

Absolute Maximum Ratings (T_a = 25°C)

| | | |
|-------------------------|------------|----|
| Power dissipation/Total | 640 | mW |
| Power dissipation/Seg | 40 | mW |
| Forward current | 20 | mA |
| Peak forward current | 60* | mA |
| Reverse voltage | 4 | V |
| Operating temperature | -25 ~ +85 | °C |
| Storage temperature | -55 ~ +100 | °C |

Electrical/Optical Characteristics (T_a = 25°C)

| Parameter | Symbol | Conditions | Min | Typ | Max. | Unit |
|--------------------------|----------------|-----------------------|-----|-----|------|------|
| Forward voltage/Seg | V _F | I _F = 10mA | — | 2.1 | 2.3 | V |
| Reverse current/Seg | I _R | V _R = 4V | — | — | 10 | μA |
| Luminous intensity/digit | I _v | I _F = 10mA | 350 | 900 | — | μcd |
| Peak wavelength | λ _P | I _F = 10mA | — | 555 | — | nm |
| Spectral line halfwidth | Δλ | I _F = 10mA | — | 30 | — | nm |

Orange SND 3620/3627SR (GaAsP/GaP)

Absolute Maximum Ratings (T_a = 25°C)

| | | |
|-------------------------|------------|----|
| Power dissipation/Total | 640 | mW |
| Power dissipation/Seg | 40 | mW |
| Forward current | 20 | mA |
| Peak forward current | 60* | mA |
| Reverse voltage | 4 | V |
| Operating temperature | -25 ~ +85 | °C |
| Storage temperature | -55 ~ +100 | °C |

Electrical/Optical Characteristics (T_a = 25°C)

| Parameter | Symbol | Conditions | Min | Typ | Max. | Unit |
|--------------------------|----------------|-----------------------|-----|------|------|------|
| Forward voltage/Seg | V _F | I _F = 10mA | — | 2.0 | 2.2 | V |
| Reverse current/Seg | I _R | V _R = 4V | — | — | 10 | μA |
| Luminous intensity/digit | I _v | I _F = 10mA | 700 | 1500 | — | μcd |
| Peak wavelength | λ _P | I _F = 10mA | — | 635 | — | nm |
| Spectral line halfwidth | Δλ | I _F = 10mA | — | 35 | — | nm |

Yellow-green SND 3620/3627UG (GaP)

Absolute Maximum Ratings (T_a = 25°C)

| | | |
|-------------------------|------------|----|
| Power dissipation/Total | 640 | mW |
| Power dissipation/Seg | 40 | mW |
| Forward current | 20 | mA |
| Peak forward current | 60* | mA |
| Reverse voltage | 4 | V |
| Operating temperature | -25 ~ +85 | °C |
| Storage temperature | -55 ~ +100 | °C |

Electrical/Optical Characteristics (T_a = 25°C)

| Parameter | Symbol | Conditions | Min | Typ | Max. | Unit |
|--------------------------|----------------|-----------------------|-----|------|------|------|
| Forward voltage/Seg | V _F | I _F = 10mA | — | 2.1 | 2.3 | V |
| Reverse current/Seg | I _R | V _R = 4V | — | — | 10 | μA |
| Luminous intensity/digit | I _v | I _F = 10mA | 600 | 1500 | — | μcd |
| Peak wavelength | λ _P | I _F = 10mA | — | 565 | — | nm |
| Spectral line halfwidth | Δλ | I _F = 10mA | — | 30 | — | nm |

* Pulse Width 1 ms
Duty Cycle 1/5