


Specifications:
 Current rating:1.0Amps
 Voltage rating:30V AC,DC
 Contact resistance:20m ohm Max
 Insulation resistance:1,000M ohm min.
 Dielectric Withstanding:750V AC For One Minute
 Operating Temperature:-40°C ~ +105°C
 Materials:

Insulator:High Temp.Plastic(UL94V-0)
 Contact material:Phosphor Bronze
 Contact Plated:Gold Plated
 Shell:Brass With Tin Plated



How To Order
 5075BS-04-XX-XX-F1

Standard Selective Plated
 15:Gold Plated 15u"
 30:Gold Plated 30u"
 BK:Black; WH:White
 No. Of Positions
 B Type Straight

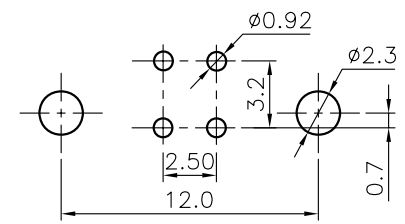

P.C.B. Layout

RoHS Compliant

F				DRAWN: Cel King	GENERAL TOLERANCE: .X= ± 0.20 .XX= ± 0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: USB B Type 180 P.C.B.	SIZE A4
E			CHECKED: Jeremy Liu					
D				APPROVAL: Mike Wu	SCALE: 1:1	PART NO: 5075BS-04-XX-XX-F1		
C					SHEET: 1 / 1			
B					PROJECTION: 			
A	09-Dec-2005	(PC0005)	Cel king					
REV	DATE	FILE	BY					