


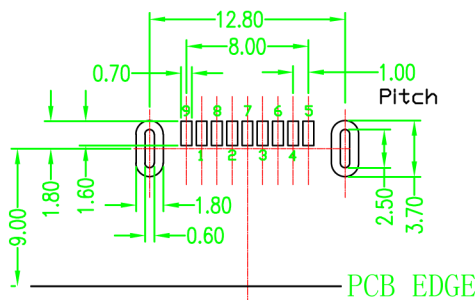



0.10

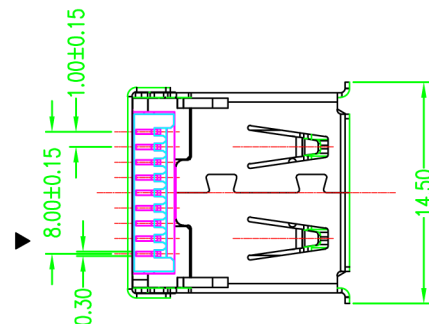

5P金手指高低差
0.08MAX

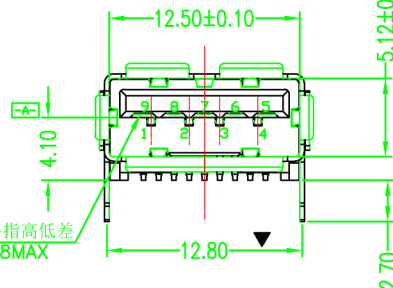

PCB LAYOUT

TOLERANCE: ± 0.05

NOTES:

1. INSULATOR: PBT+30%G/F, COLOR: BLUE
2. USB 4P CONTACT: PHOSPHOR BRONZE, T=0.20mm
USB 5P CONTACT: BRASS, T=0.20mm
SHELL: BRASS T=0.30mm
3. PLATING:
CONTACT: GOLD (SEE 6) OVER 50u" MIN NICKEL AND
80u" MIN TIN OVER 50u" MIN NICKEL ON SOLDER TAIL;
SHELL: 80u" MIN NICKEL ALL OVER.
4. ELECTRICAL CHARACTERISTICS:
4.1 CONTACT RESISTANCE: 30mΩ MAXIMUM
4.2 CONTACT CURRENT RATING: 1.5 AMPERES
4.3 DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.
4.4 INSULATION RESISTANCE 1000 MΩ MIN
4.5 OPERATING TEMPERATURE: -40°C ~ 85°C
5. MECHANICAL CHARACTERISTICS:
5.1 MATING FORCE: 3.57kg MAX
5.2 UNMATING FORCE: 1.02kg MIN
5.3 DURABILITY: MANDATORY: 5,000 CYCLES
6. PRODUCT NO. DESCRIPTION:

XUSB3A-0AXXE001

Contact Finish:
00: Material 10: 10u"Gold
01: G/F 15: 15u"Gold
05: 5u"Gold 30: 30u"Gold

TOLERANCE:		UNIT		DUWON COMTECH CO., LTD			
X. ± 0.50	X. $\pm 1^\circ$	MM					
.X ± 0.30	.X $\pm 1^\circ$	SHEET					
.XX ± 0.20	.XX $\pm 1.0^\circ$	1/1	DRAW:	Andy	2011.01.17	P/N: XUSB3A-0AXXE001	
.XXX ± 0.10		SCALE	DESIGN:			ITEM:	
		1:1	CHECK:			USB 3.0 A F SMT (鱼叉脚)	
		REV: A	APPR:			DRW NO: C-USB3A-0AXXE001	

LTR	ECN NO	REVISION	RECORD	DRAW	DATE
1	2	3	4	5	6