


# 45W Single Output DIN Rail Power



**CB CE**

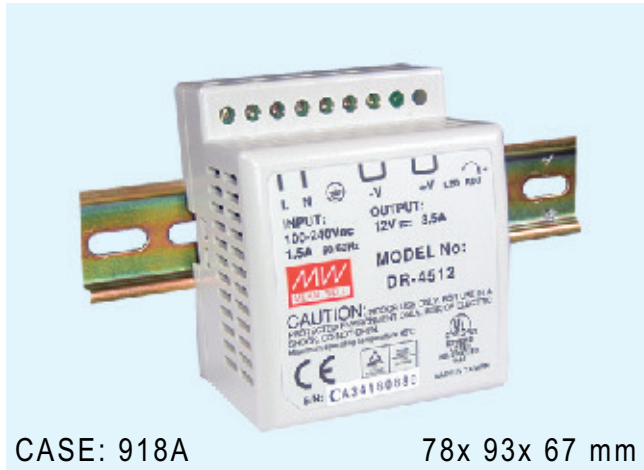

CASE: 918A

78x 93x 67 mm

- Universal AC input / Full range
- UL508 listed
- Installed on DIN rail TS35 / 7.5 or 15
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Fixed switching frequency at 100KHz
- Approvals: UL / CUL / TUV / CB / CE
- LED indicator for power on
- Cooling by free air convection
- 100% full load burn-in test
- 3 years warranty

AC input voltage range	85~264VAC; 120~370VDC
AC inrush current	Cold start, 28A at 115VAC, 56A at 230VAC
DC adjustment range	±10% rated output voltage
Overload protection	105%~150% constant current limiting, auto-recovery
Over voltage protection	115%~135% rated output voltage
Setup, rise, hold up time	800ms, 60ms, 100ms at full load and 230VAC
Withstand voltage	I/P-O/P:3KVAC, I/P-FG:1.5KVAC, 1minute
Working temperature	0~45°C@100%, -10°C@80%, 50°C@80% load
Safety standards	UL508, TUV EN60950-1 approved
EMC standards	EN55022 class B, EN61000-3-2,3, EN61000-6-2, EN61000-4-2,3,4,5,6,8,11, ENV50204
Connection	I/P: 3 poles, O/P: 4 poles screw DIN terminal
Packing	0.31kg ; 48pcs / 16.1kg / 1.3CUFT

Stock No.	Model No.	Output	Tol.	R&N	Effi.
10441	DR-4505	5V, 0~5.0A	±2%	100mV	72%
10442	DR-4512	12V, 0~3.5A	±1%	200mV	77%
10443	DR-4515	15V, 0~2.8A	±1%	240mV	77%
10444	DR-4524	24V, 0~2.0A	±1%	480mV	80%