FP-108-J/DC

50 x 50 x 10 mm

DESIGN FEATURES

* Bearing System:
  Sleeve bearing & ball bearing
* Impeller:
  Plastic with fiber glass filed UL 94V-0
* Housing:
  Plastic with fiber glass filed UL 94V-0
* Motor:
  Brushless DC
* Connecting:
  Wire leads
* Speed:
  S-1 high speed type
  S-2 medium speed type
  S-3 low speed type
* Available FG Type for Speed Sensor Signal
* Available RD Type for Rotor Locked Alarm Signal

Dimensions: mm

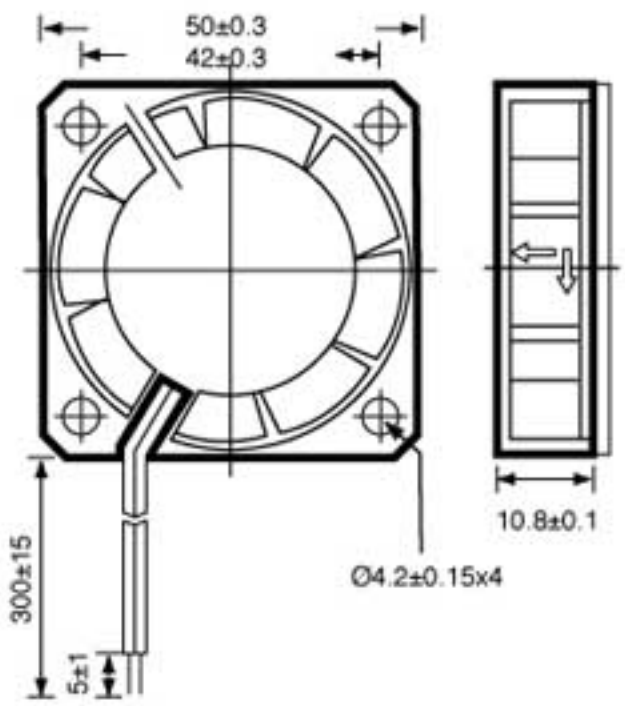

Performance

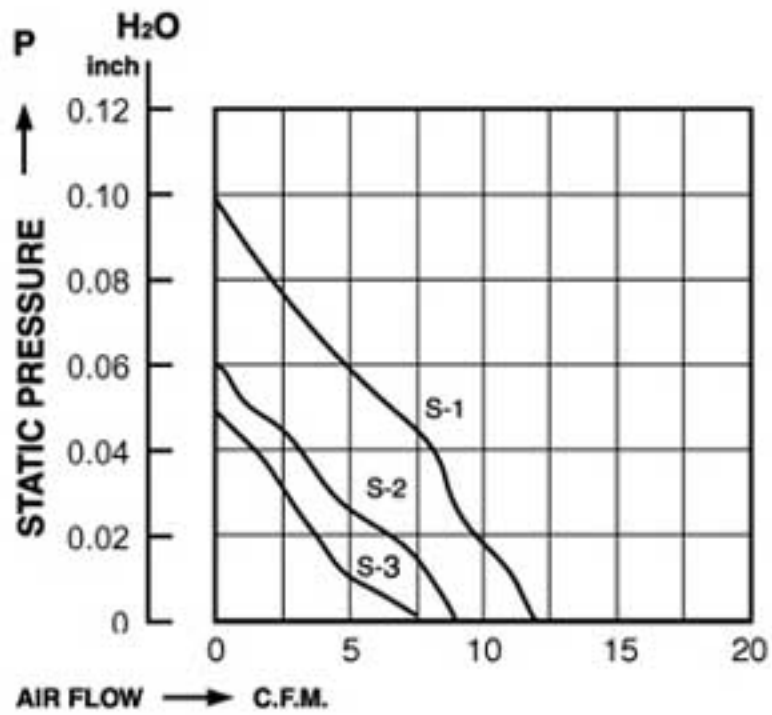

Specifications

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M^3/MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H_2O)	NOISE (dBA)
FP-108J/DC	12	12.30	0.35	0.16	1.92	5500	0.10	32
(S-1)	24	12.30	0.35	0.09	2.16	5500	0.10	32
FP-108J/DC (S-2)	12	8.80	0.25	0.10	1.20	4000	0.06	28
FP-108J/DC (S-3)	12	7.50	0.21	0.07	0.84	3500	0.05	20