


## Model 2BC-MG Double Banana Plug to Minigator Test Clip Breakouts

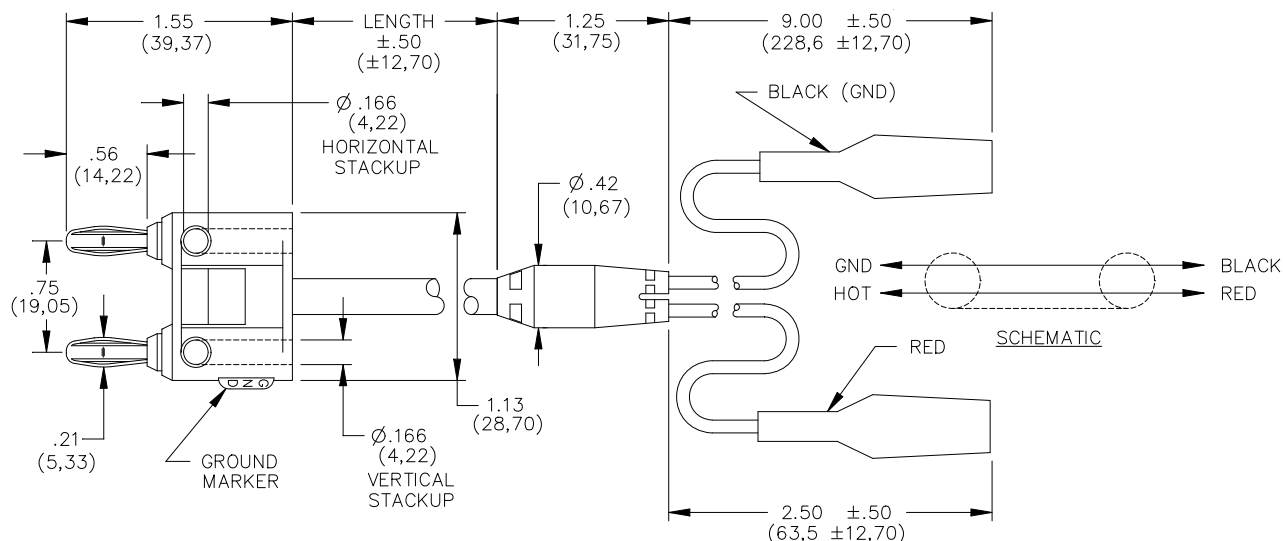

### Features

- Jaws open to .187" Max.
- Ideal for use with Pomona Model 2269 or any standard double Banana Jack.
- Allows connection from a Double Banana Binding Post to Alligator Clips.

### Materials

#### Double Banana Plug:

Spring: Nickel plated Beryllium Copper.

Body: Nickel plated brass Alloy 360 ½ hard.

Insulator: Polypropylene, color matches cable

Cable: RG 58C/U

Breakout: Molded PVC, color matches cable

Breakout Leads: 20 AWG. 41 x 36 T.C. PVC insulated .087 inch O.D., Color: one Black, one Red

Miniature Alligator Clips: Plated steel, vinyl insulator, color matches wire

### Ratings

Operating Voltage: 45 VRMS

Operating Temperature: +50°C (+122°F) Max.

Cable Capacitance: 30.8 pf/ft

Cable Impedance: 50 Ohms nominal

### Ordering Information

Model: 2BC-MG-36

Standard cable length is 36" (914).

Additional lengths can be quoted upon request.

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.