







**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

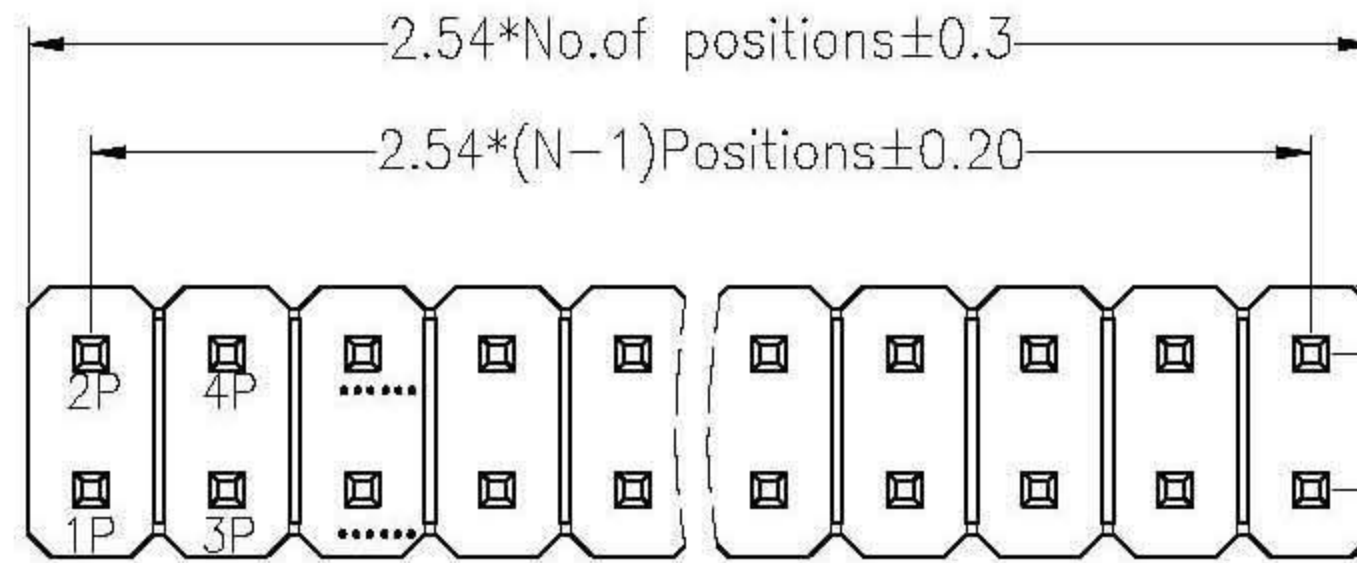

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

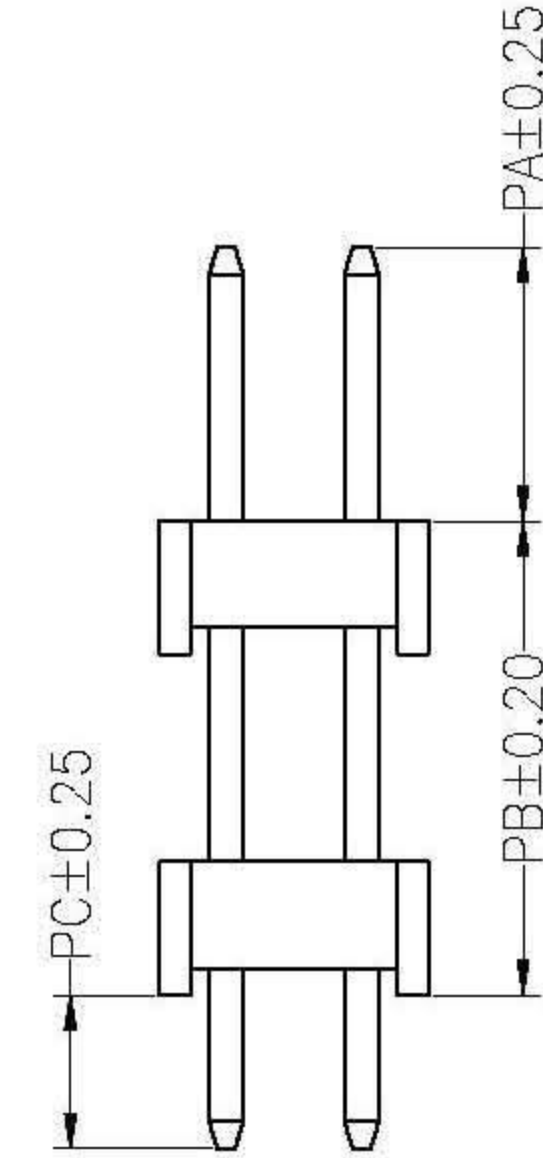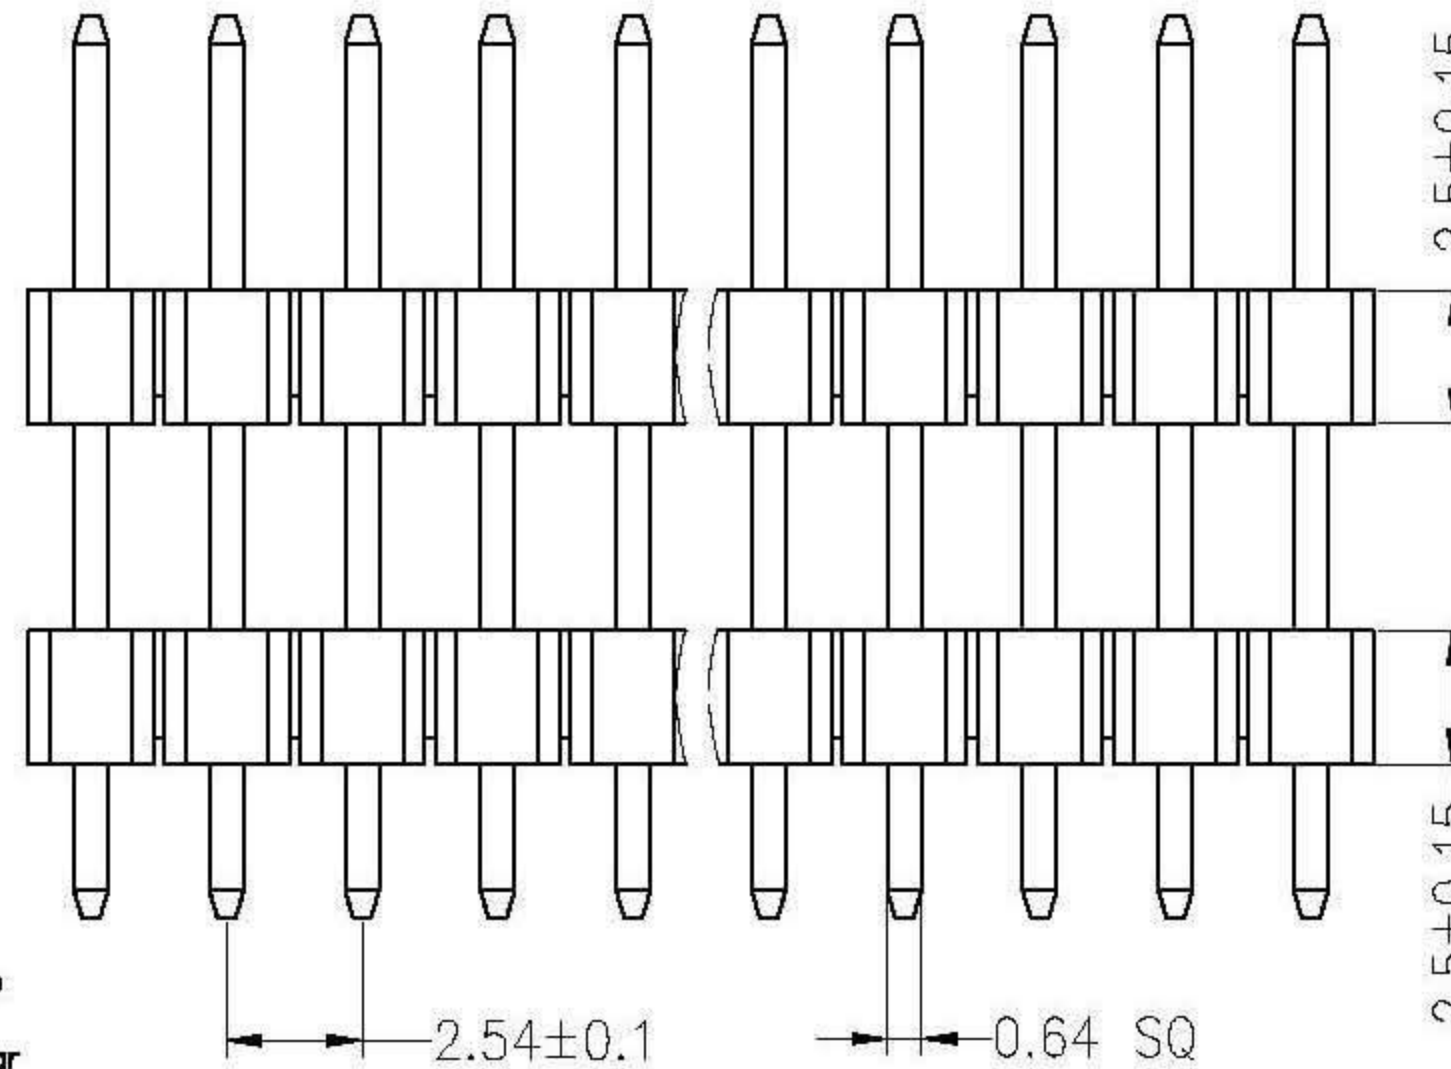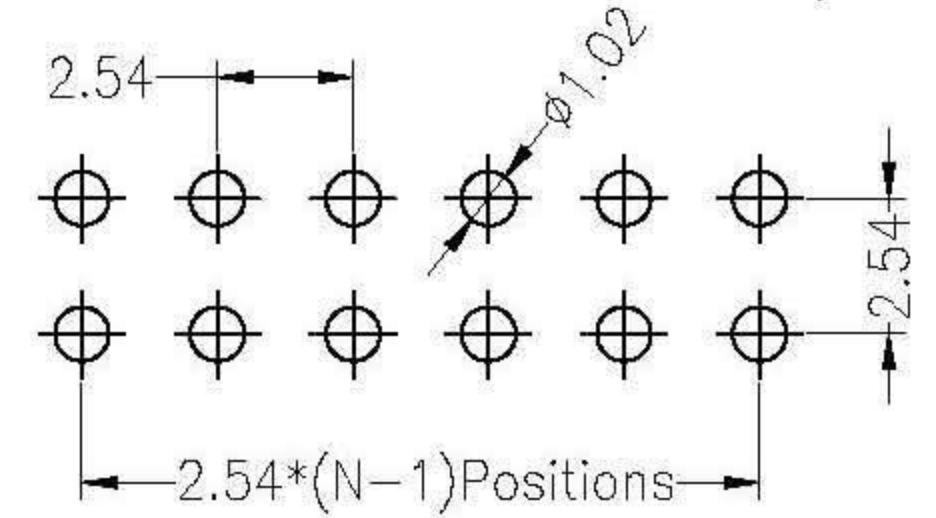

**Ordering Information**

1225 - 11 XX X N XX S XXX X 01

- No.of Pins Per Row: 1x40, 1--40
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
- Contact Plating: G0:Gold Flash, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin, SN:Tin
- Pin Length
- Packing: 0=PE Bag, A=Tray, T=Tube, P=Tube+Cap, R=Reel+Cap, M=Reel+Mylar

Dimension antitheses list				
ITEM	PC	PA	PB	L
Standard	3.00	6.00		
Alternate	3.00	6.00	11.00	20.00

OPERATION		DRAW	YiYuSheng	12.04.18	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	◆
DIM	TOL					

A0		2012.04.18	NEW DRAWING	深圳市锦凌电子有限公司		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	TITLE:	2.54PH Dual Row Double Plastic 180° H=2.5	

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---