

C4350Z-H2

Intel® Core CPU

Full aluminum alloy, fanless cooling structure




Product Features

- Support Intel® Core CPU (Please see order information below)
- 2*DDR4 SODIMM slot, support 2666MHz memory, up to 64GB
- 1*HDMI1.4, 1*HDMI2.0, support dual display
- 2*RTL8111H Gigabit internet port
- 2*RS232/485 DB9
- 4*USB3.0, 4*USB2.0
- DC 12V

Specification

Model	C4350Z-H2 V1.0(6200U)	
Chassis	Material/Structure	Full aluminum alloy, fanless cooling structure
	Colour	Black
	Dimensions	141*126*56.5MM
	Weight	0.98KG
	Install	Desktop/wall-mounted
Main Board	CPU	Integrated Intel Core i5-6200U @ 2.30GHz
	Graphics	Integrated Intel® UHD Graphics, support 4K/60Hz
	Memory	2*DDR4 SODIMM slot, support 2666MHz memory, up to 64GB
Front panel interface	POWER	1* power switch, 1* reset switch, 1*ACLOSS (power on switch)
	LED	1*power LED, 1*hard disk LED
	USB	2*USB2.0, 2*USB3.0
	SIM	1*SIM slot
Rear panel interface	Display	1 *HDMI1.4 (4096x2304@24Hz) ,1 HDMI2.0 (4096x2304@60Hz)
	LAN	2*Realtek 8111H Gigabit internet port, support network wake up, PXE function
	USB	2*USB2.0, 2*USB3.0
	COM	2*RS232/485 DB9 serial port, support 9 pin live function
	Audio	1*Line out, 1*MIC
Storage	Power	1*DC power, support DC 12V power input
	SATA	1*2.5-inch hard disk
Extend	M.2	1*M.2/SSD, support Key-M, 2280 NVME PCIe4 SSD
	Mini PCIE	1*MiniPCIE/4G, support 4G module
System support	M.2	1* M.2/WiFi,Key-E, 2230, support WIFI module
	Windows	Windows 10
	Linux	Ubuntu
Power	Watch Dog	Support hardware reset function (256 level, 0~255 seconds)
	Power type	External power adapter
	Voltage input	DC 12V
Environment	Power output	AC TO DC, 36W / 60W (Optional)
	Operating temperature	-10°C ~ 50°C
	Storage temperature	-20°C ~ 70°C
	Relative humidity	5%-95% relative humidity, no condensation
Working vibration	0.5g rms/5-500HZ/random/operating	

C4350Z-H2 Structure/Size

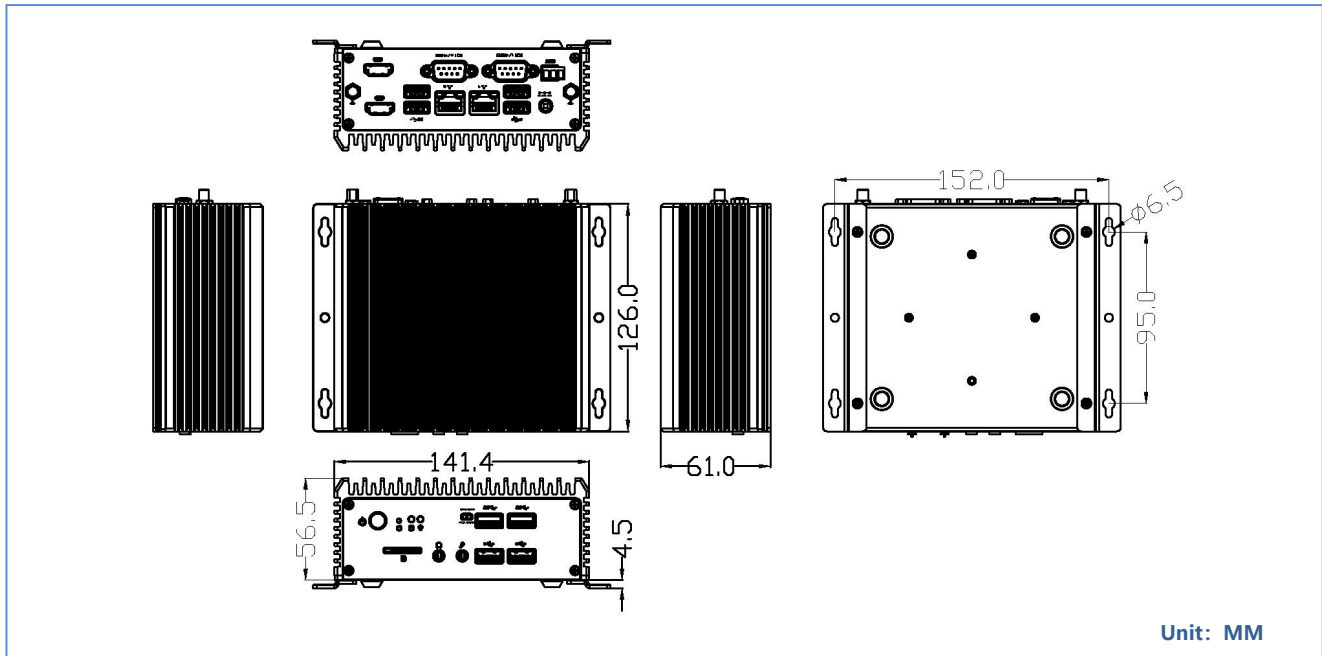

Order information

No.	Model	CPU	Memory	Motherboard	IO Board	LAN	COM	HDMI	USB2.0	USB3.0	power
1	C4350Z-H2 V1.0(5205U)	5205U/1.6GHz	2*SODDDR4	N10-C322H	N81-HD	2	2	2	4	4	DC 12V
2	C4350Z-H2 V1.0(6200U)	I5-6200U/2.3GHz	2*SODDDR4	N62-I522H	N81-HD	2	2	2	4	4	DC 12V
3	C4350Z-H2 V1.0(8265U)	I5-8265U/1.6GHz	2*SODDDR4	N81-I522H	N81-HD	2	2	2	4	4	DC 12V
4	C4350Z-H2 V1.0(10210U)	I5-10210U/1.6GHz	2*SODDDR4	N10-I522H	N81-HD	2	2	2	4	4	DC 12V
4	C4350Z-H2 V1.0(10110U)	I3-10110U/2.1GHz	2*SODDDR4	N10-I322H	N81-HD	2	2	2	4	4	DC 12V